


**M8 Connector**

TE Internal #: T4041017041-000

Standard Circular Connectors, Wire-to-Panel, 4 Position, Sealable, Wire &amp; Cable, Signal, Panel Mount, Reverse Gender, Nickel, M8 Connector

[View on TE.com >](#)

Connectors &gt; Circular Connectors &gt; Standard Circular Connectors &gt; M8 Panel Mount PCB

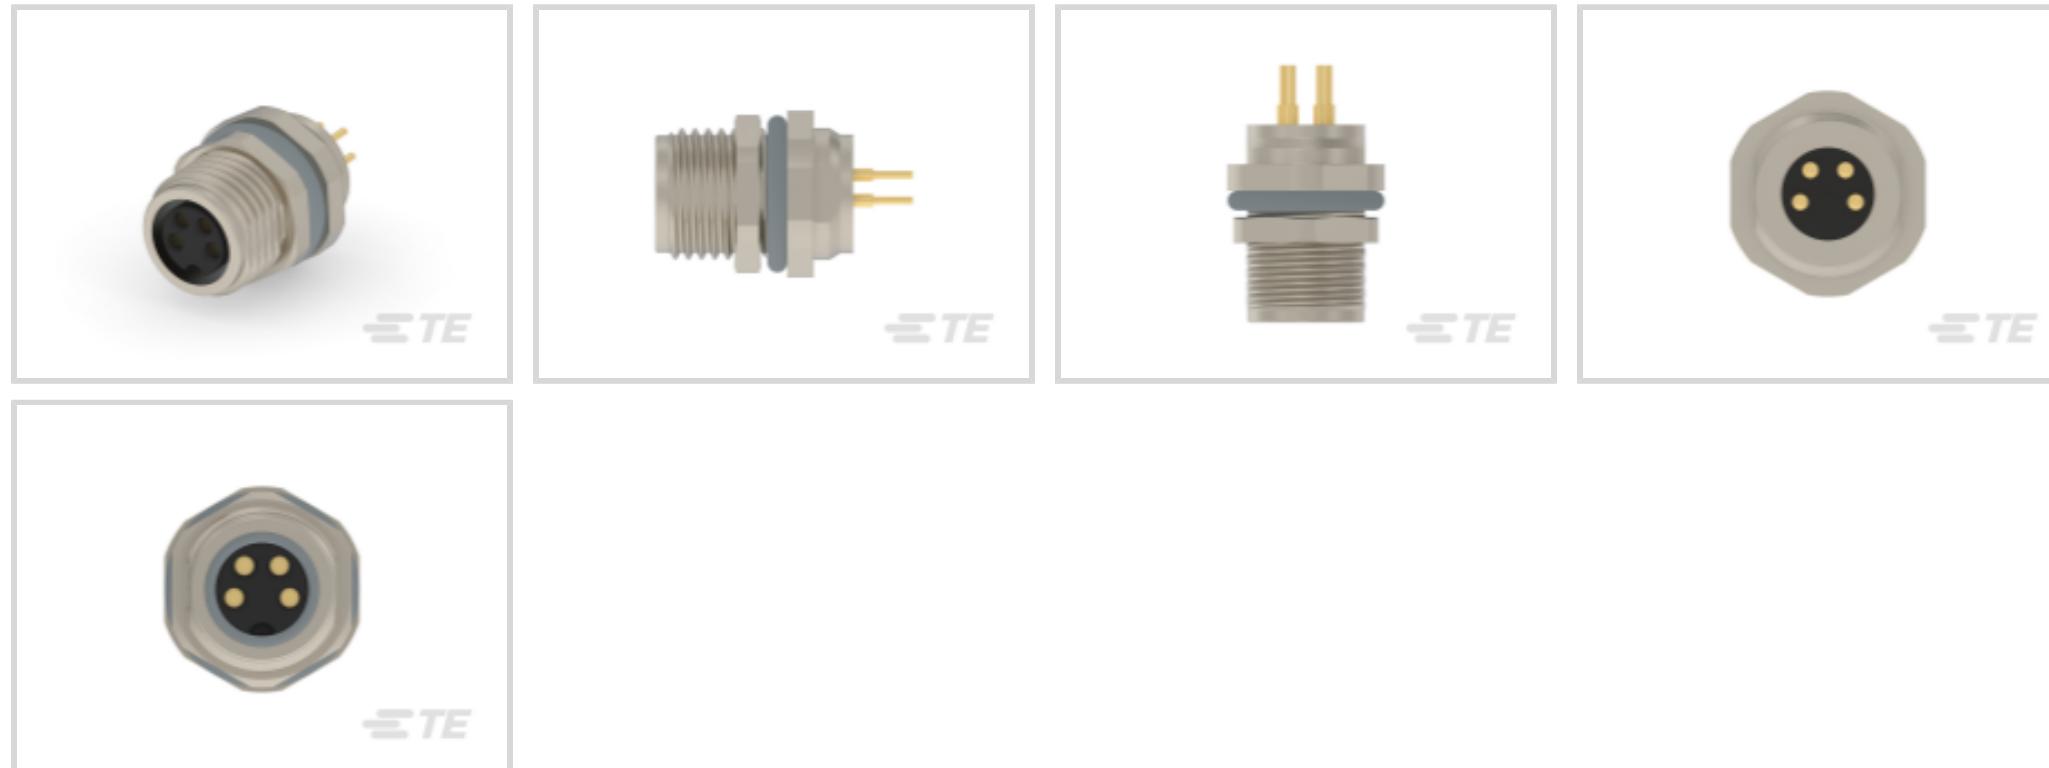Connector System: **Wire-to-Panel**Connector Mounting Type: **Panel Mount**Number of Positions: **4**Sealable: **Yes**Connector & Contact Terminates To: **Wire & Cable**[All M8 Panel Mount PCB \(12\)](#)**Features****Product Type Features**

Product Type	Connector Assembly
Accessory Color	Black
Assembly Requirement	Factory Assembled
Assembly Type	Electrical Connector
Circular Connector Shell Type	Metal-Shell
Connector Product Type	Connector Assembly
Connector System	Wire-to-Panel
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Circular Connector Type	Receptacle
Shell Type	Metal

**Configuration Features**

Keying & Polarized Position Locations	A
---------------------------------------	---

Factory Installed Backshell	No
Keying	A
Number of Positions	4
Number of Power Positions	0
Number of Signal Positions	4
Contacts Preloaded	Yes

#### Electrical Characteristics

Operating Voltage	30 VAC
-------------------	--------

#### Body Features

Peripheral Seal Material	Silicone
Environmental Protection	IP67
O-Ring Material	Silicone
Environmental Protection Type	Sealed
Shell Plating Material	Nickel
Shell Base Material	Copper Alloy
Circular Connector Insulation Material Type	Polyamide 67 GF30
Hermetically Sealed	Yes

#### Contact Features

Contact Current Rating (Max)	3 A
Reverse Gender	Yes
Circular Connector Contact Type	Socket

#### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

#### Mechanical Attachment

Mating Retention Type	Threaded Coupling
Mating Alignment	With
Connector Mounting Type	Panel Mount
Polarization Code	A
Mating Alignment Type	Keyed

#### Housing Features

Circular Connector Shell Size	12.6
-------------------------------	------

#### Usage Conditions

IP Dust Sealing Level	6
IP Water Sealing Level	IP67
Operating Temperature Range	-40 - 85 °C[-40 - 185 °F]

### Operation/Application

Circuit Application	Signal
Shielded	No

### Industry Standards

UL Flammability Rating	UL 94 V-0
------------------------	-----------

### Packaging Features

Packaging Quantity	1
--------------------	---

### Product Compliance

For compliance documentation, visit the product page on [TE.com](https://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (4% in Component Part) <small>Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</small>
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # T4011008041-000  
M8,SCREW, MALE,S,UNSHIELD,4P,  
GOLD



TE Part # 2823563-1  
M8-DUST CAP-FEMALE CONN-IP67-  
W/O SLEEVE

## Also in the Series


### M8 Connector

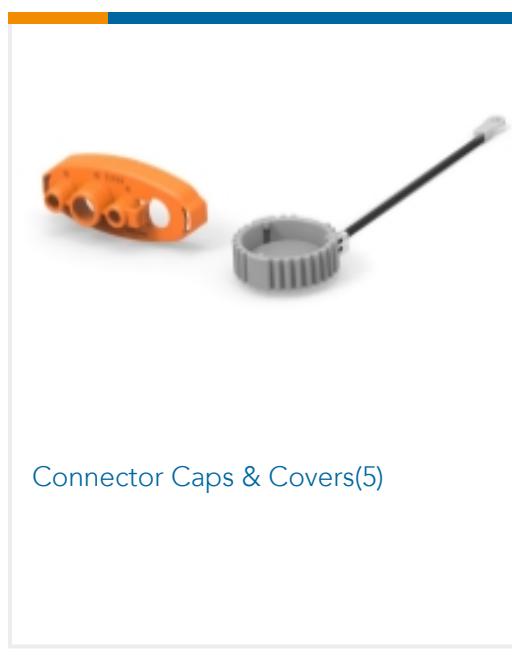


Connector Caps & Covers(5)



Connector Hardware(4)

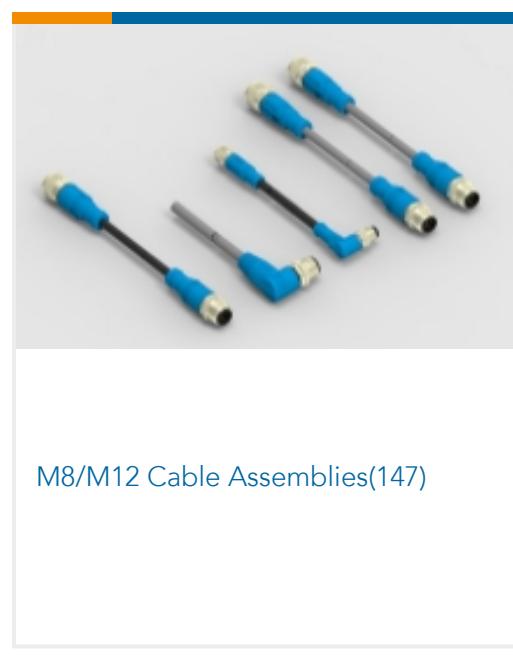

M8/M12 Cable Assemblies(147)

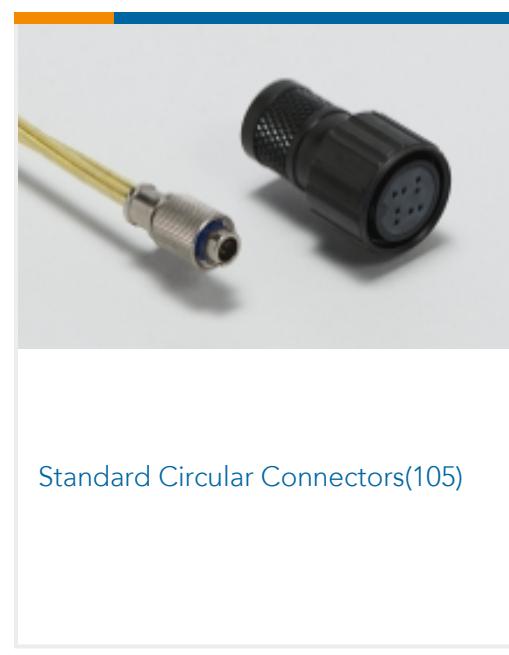

Standard Circular Connectors(105)

## Customers Also Bought



TE Part # T4141012051-000  
M12 Panel Mount PCB



TE Part # T4013008041-000  
M8,SCREW, MALE,R/A,UNSHIELD,4P,  
GOLD



TE Part # 1-84952-4  
1MM FPC HORZ.BTTM CONT.ASS.14P



TE Part # 2344654-6  
WLAN DUAL BAND ANTENNA PCB V  
100 MHF4 TY



TE Part # 5-1676123-6  
1/2W SM M/OX 5% 160R



TE Part # 9-2176314-5  
MELF SMA-A 1M0 1% 50PPM 0102 0.3  
W



TE Part # 4-2176314-2  
MELF SMA-A 390R 1% 50PPM 0102 0.3  
W



TE Part # 7-2176314-6  
MELF SMA-A 39R 1% 50PPM 0102 0.3  
W



TE Part # 6-2176314-7

MELF SMA\_A 47K 1% 50PPM 0102 0.3  
W

## Documents

### Product Drawings

[M8.FMLE.PNLREAR.4POS.STR PCB](#)

English

---

### CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_T4041017041-000\\_A.2d\\_dxf.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_T4041017041-000\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_T4041017041-000\\_A.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[M8 / M12 Connector System Catalog](#)

English

---

### Product Specifications

[Application Specification](#)

English

[Application Specification](#)

English

---

### Agency Approvals

[UL](#)

English