



Terminals & Splices > Ring Terminals



Ring Terminal Product Type: Closed Ring Tongue Terminal

Wire Size: 202 - 810 CMA

Stud Size: #2, M2

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	#2, M2
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Holes	1
-----------------	---

Body Features

Product Weight	.115 g
----------------	--------

Contact Features

Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions



Wire Size	202 - 810 CMA
Stud Diameter	2.36 mm[.093 in]
Tongue Thickness	.79 mm[.031 in]
Product Length	10.64 mm[.419 in]
Barrel Inside Diameter	.89 mm[.035 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Quantity	1000
Packaging Method	Package

Other

Line	Budget
------	--------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

REPRESENTATION ONLY

TE Part # 69363
DAHT STRATO SOLIS 26-20 ASSY

Also in the Series | SOLISTRAND Budget

Knife Disconnects(4)

Ring Terminals(108)

Spade Terminals(46)

Customers Also Bought

TE Part # 206486-2
CPC RECPT ASSEMBLY SIZE 11-9

TE Part # 1445421-3
REC-8-4,FLNG MT,LG INS,STD KEY


TE Part # 66103-2
III+ PIN,24-20,TIN-LEAD,LP

TE Part # 925370-6
MOD.IV REC HSG, 2X6P





TE Part # 31423
TERMINAL,BUDG R 26-22, 0

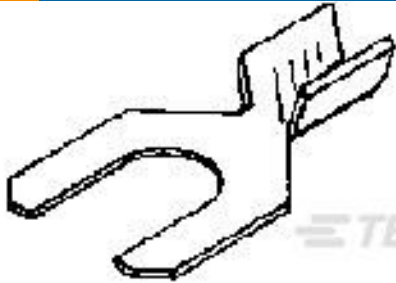

TE Part # 42113-2
SPADE TERMINAL 12-10 AWG TPBR



TE Part # 1734298-1
Shield Finger 6525



TE Part # 1-925369-2
MOD 4 REC.HSG 1X12P



TE Part # 224064-E
M12 FEMALE, A CODE, 5P, 17MM SMT

Documents

Product Drawings
TERMINAL,BUDG R 26-22 2
English

CAD Files
3D PDF
3D
Customer View Model
ENG_CVM_CVM_322771_L.2d_dxf.zip
English
Customer View Model
ENG_CVM_CVM_322771_L.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_322771_L.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.