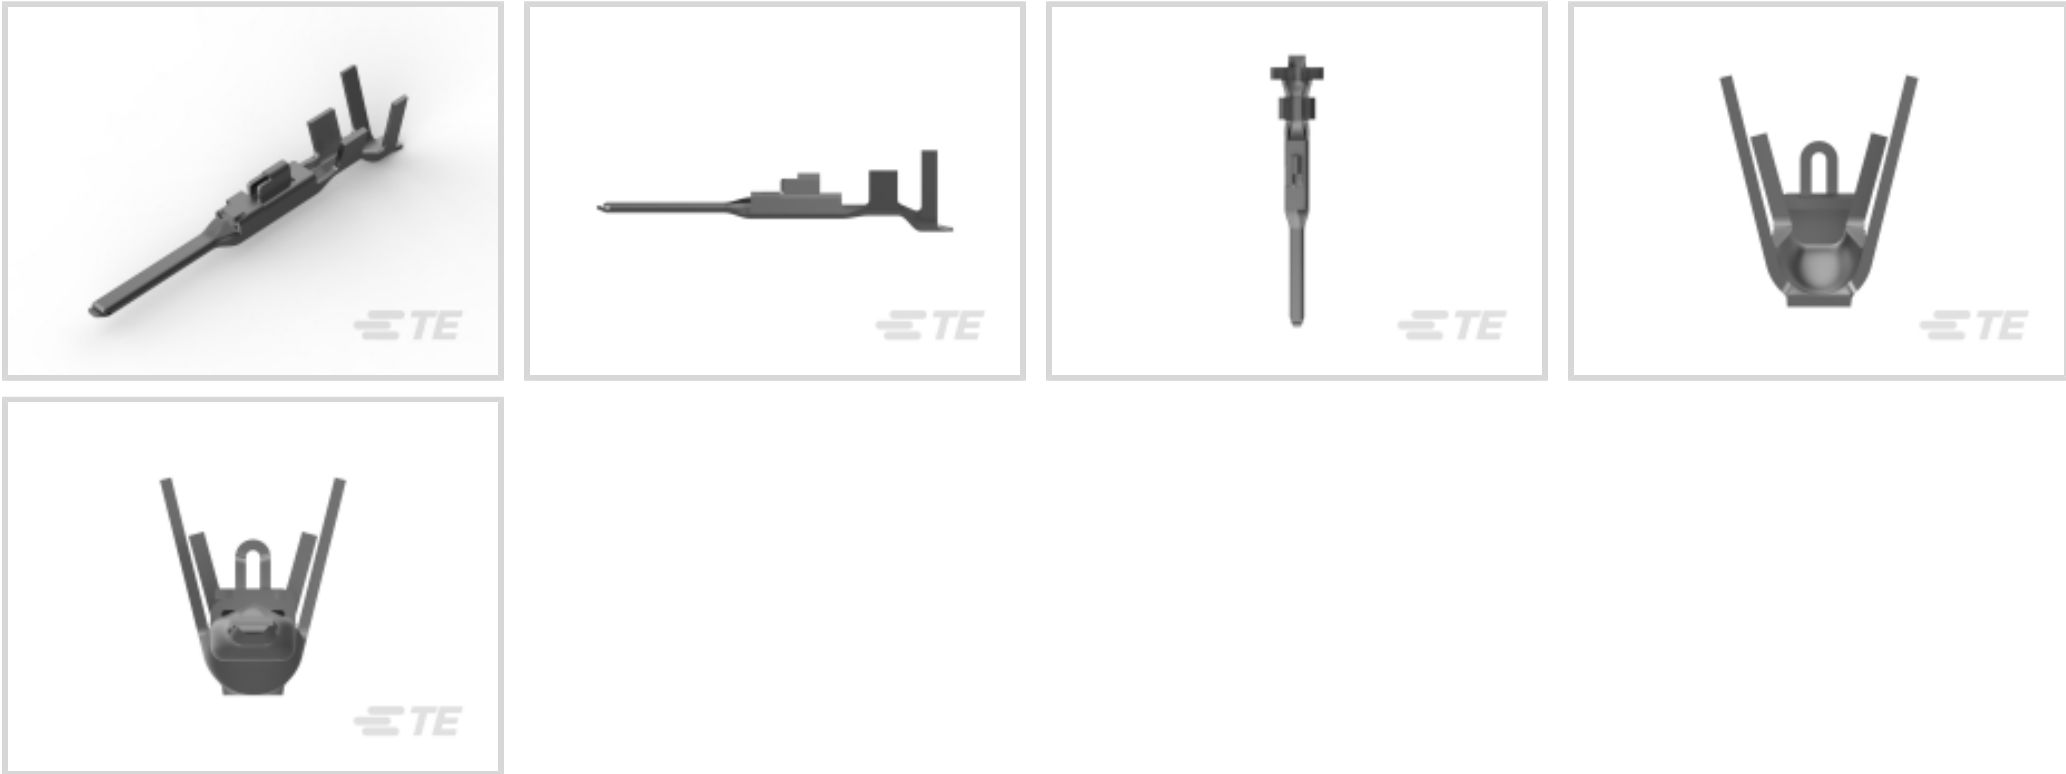




Connectors > Contacts > Connector Contacts



Contact Type: **Tab**
Contact Mating Area Plating Material: **Tin**
Wire Contact Termination Area Plating Material: **Pre-Tin**
Operating Voltage: **50 VAC, 300 VAC**
Contact Retention Within Housing: **With**

Features

Electrical Characteristics

Operating Voltage	50 VAC, 300 VAC
-------------------	-----------------

Contact Features

Mating Tab Width	1.2 mm[.047 in]
Mating Tab Thickness	.64 mm[.023 in]
Wire Contact Termination Area Plating Thickness	.8 µm[31.49 µin]
Wire Contact Termination Area Plating Material Finish	Matte
Contact Mating Area Plating Material Thickness	.8 µm[31.49 µin]
Contact Orientation	Straight
Contact Type	Tab
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	Pre-Tin
Contact Retention Within Housing	With
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	12 A



Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire & Cable

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Compatible Insulation Diameter Range	1.7 - 3.3 mm[.067 - .13 in]
Wire Size	.5 - 1.42 mm²

Usage Conditions

Operating Temperature Range	-30 - 105 °C[-22 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag & Box

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

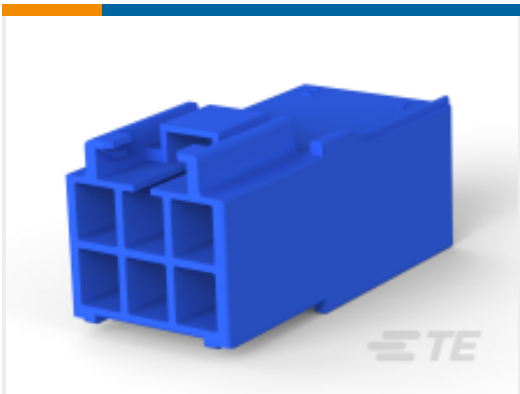
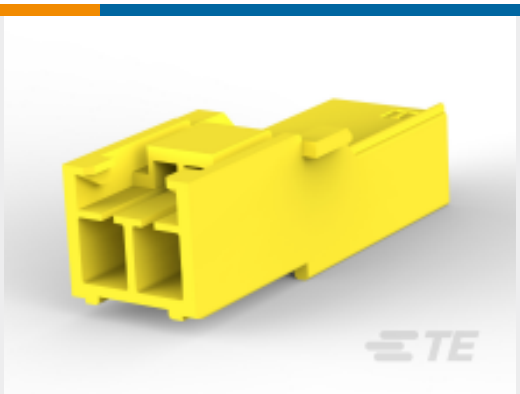
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 176301-1 UNVI POWER CAP HSG 18P PNL MTG	 TE Part # 176291-1 UNIV POWER CAP HSG 18P F/H	 TE Part # 176299-1 UNVI POWER CAP HSG 12P PNL MTG	 TE Part # 176290-1 UNIV POWER CAP HSG 15P F/H
 TE Part # 176295-1 UNIV POWER CAP HSG 6P P/MOUNT	 TE Part # 176286-1 UNIV POWER CAP HSG 8P F/H	 TE Part # 176284-1 AMP UNIVERSAL POWER CAP 4P	 TE Part # 176285-1 AMP UNIVERSAL POWER CAP 6P
 TE Part # 176285-6 AMP UNIVERSAL POWER CAP 6P	 TE Part # 176283-1 AMP UNIVERSA POWR CAP 3P	 TE Part # 176282-4 AMP UNIVERSAL POWER CAP 2P	 TE Part # 176282-1 AMP UNIVERSAL POWER CAP 2P
 TE Part # 176281-1 UNIV POWER CAP HSG 1P F/H	 TE Part # 176284-9 AMP UNIVERSAL POWER CAP 4P	 TE Part # 176288-1 UNIV POWER CAP HSG 10P F/H	 TE Part # 176289-1 UNIV POWER CAP HSG 12P F/H



TE Part # 176297-1
UNIV POWER CAP HSG 9P P/MOUNT

TE Part # 176300-1
UNVI POWER CAP HSG 15P PNL MTG

TE Part # 913923-1
EXTRACTON TOOL FOR 175150

TE Part # 176760-1
AMP LATTICE 12P CAP HSG

Also in the Series | AMP Universal Power

Connector Contacts(22)

Insertion & Extraction Tools(1)

Rectangular Power Connectors(163)

Customers Also Bought

TE Part # 5-1971773-4
PTL 1X4 PLUG HSG HIGH TEMP KEY A LGR

TE Part # 176299-1
UNVI POWER CAP HSG 12P PNL MTG

TE Part # 1-480324-0
15P CMNL CAP HSG P/M NATL

TE Part # 176295-1
UNIV POWER CAP HSG 6P P/MOUNT

TE Part # 176286-1
UNIV POWER CAP HSG 8P F/H

TE Part # 176285-1
AMP UNIVERSAL POWER CAP 6P

TE Part # 176282-1
AMP UNIVERSAL POWER CAP 2P

TE Part # 175151-1
AMP UNIVERSAL POWER REC CONT.

Documents

Product Drawings

UNIV POWER TAB CONT L/P

English

CAD Files

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_175154-1_L.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175154-1_L.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_175154-1_L.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Crimping of Universal Power Contact](#)

English

[Product Specification](#)

Japanese

[AMP Universal Power Connector](#)

Japanese

Instruction Sheets

[Extraction Tool for UP\(913923-1\)](#)

English

[Instruction Sheet \(non U.S.\)](#)

English

[Hand Tool, PN 914181-1, Universal Power Contact \(Was IS-505J\)](#)

Japanese

[Instruction Sheet \(non U.S.\)](#)

English