




Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING

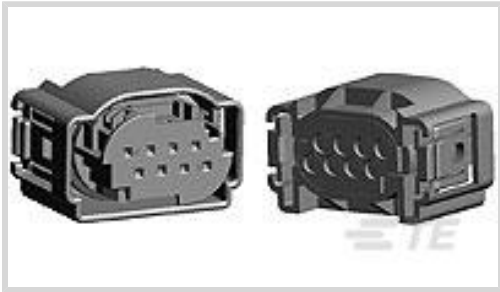

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 8

Connector & Housing Type: Housing for Female Terminals

Centerline (Pitch): 2.54 mm [.1 in]

Sealable: Yes

[All MQS, CONNECTOR HOUSING \(435\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board, Wire-to-Device, Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal

Configuration Features

Number of Positions	8
Number of Rows	2

Electrical Characteristics

Operating Voltage	50 VDC
Nominal Voltage Architecture	50 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black



Connector & Keying Code	A
-------------------------	---

Contact Features

Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.63 mm[.025 in]
Contact Current Rating (Max)	7.5 A

Mechanical Attachment

Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	2.54 mm[.1 in]

Dimensions

Connector Height	24 mm[.945 in]
Product Width	20.7 mm[.815 in]
Product Length	31.6 mm[1.244 in]
Row-to-Row Spacing	6.9 mm[.272 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
Connector Position Assurance Capable	No



Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-M8793-T273
MQS, RECEPTACLE AND TAB



TE Part # 1-967658-1
8pos MQS .63 header 90deg



TE Part # 7-962885-5
MQS0,63 Au rec LL EDS 0,2-0,35



TE Part # 1452861-1
8 WAY MQS BLANKING COVER



TE Part # 2321138-2
REC CONN CVR,8POS,MQS,180DEG

TE Part # 2367200-2
REC CONN CVR,8POS,MQS

TE Part # 1-1534231-1
MQS BU-GEH 8P,SW

TE Part # 1534230-1
MQS SCHUTZKAPPE

TE Part # 1534232-1
KONTAKTSICHERUNG8P

TE Part # 7-965906-5
MQS0,63 Au rec LL EDS 0,5-0,75

Also in the Series | MQS

Automotive Connector Caps & Covers
(113)

Automotive Connector EMC Shielding
(3)

Automotive Connector Locks & Position Assurance(26)

Automotive Housings(379)

Automotive Terminals(88)

Connector Seals & Cavity Plugs(26)


Insertion & Extraction Tools(42)

Other Automotive Connector Accessories(7)

PCB Headers & Receptacles(143)

Customers Also Bought

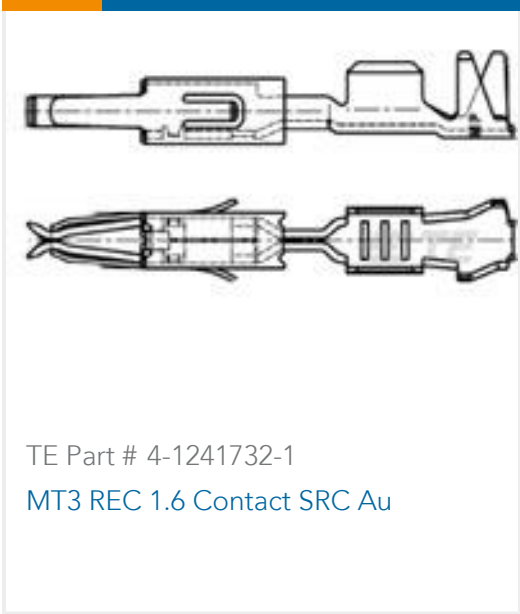

 TE Part # 1456471-2 8p Hybrid 0.64/2.8 Unsealed Plug Assy	 TE Part # 4-2112594-2 4(6)POS,NANOMQS,REC HSG,ASSY, SEALED	 TE Part # 184346-1 2X2 CAP ASY KEY A C3	 TE Part # 1-2236269-1 24POS, MIXED,REC HSG, 20GENYMCP,ASSY,CODA
 TE Part # 2035334-8 CONTACT, FEMALE0.64 ,20.35SQMM	 TE Part # 2203770-2 2POS, MCON 1.2 CB TAB 1p TL SEALED	 TE Part # 2236269-2 24POS, MIXED,REC HSG, 20GENYMCP,ASSY,CODB	 TE Part # 2321138-2 REC CONN CVR,8POS,MQS,180DEG
 TE Part # 4-1241732-1 MT3 REC 1.6 Contact SRC Au	 TE Part # 2177472-1 73POS, MIXED,REC HSG,ASSY,BK		

Documents

Product Drawings
8POS MQS REC COD A

English

CAD Files
3D PDF

3D

Customer View Model
ENG_CVM_CVM_1-1534229-1_A.2d_dxf.zip

English

Customer View Model
ENG_CVM_CVM_1-1534229-1_A.3d_igs.zip

English

Customer View Model
ENG_CVM_CVM_1-1534229-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages



Micro Quadlok Interconnection System (MQS)

English

Product Specifications

Application Specification

English

SHROUDED CONNECTION, 8POS.

English

Application Specification

English