




Connectors > Lighting Connectors > Ballast Connectors

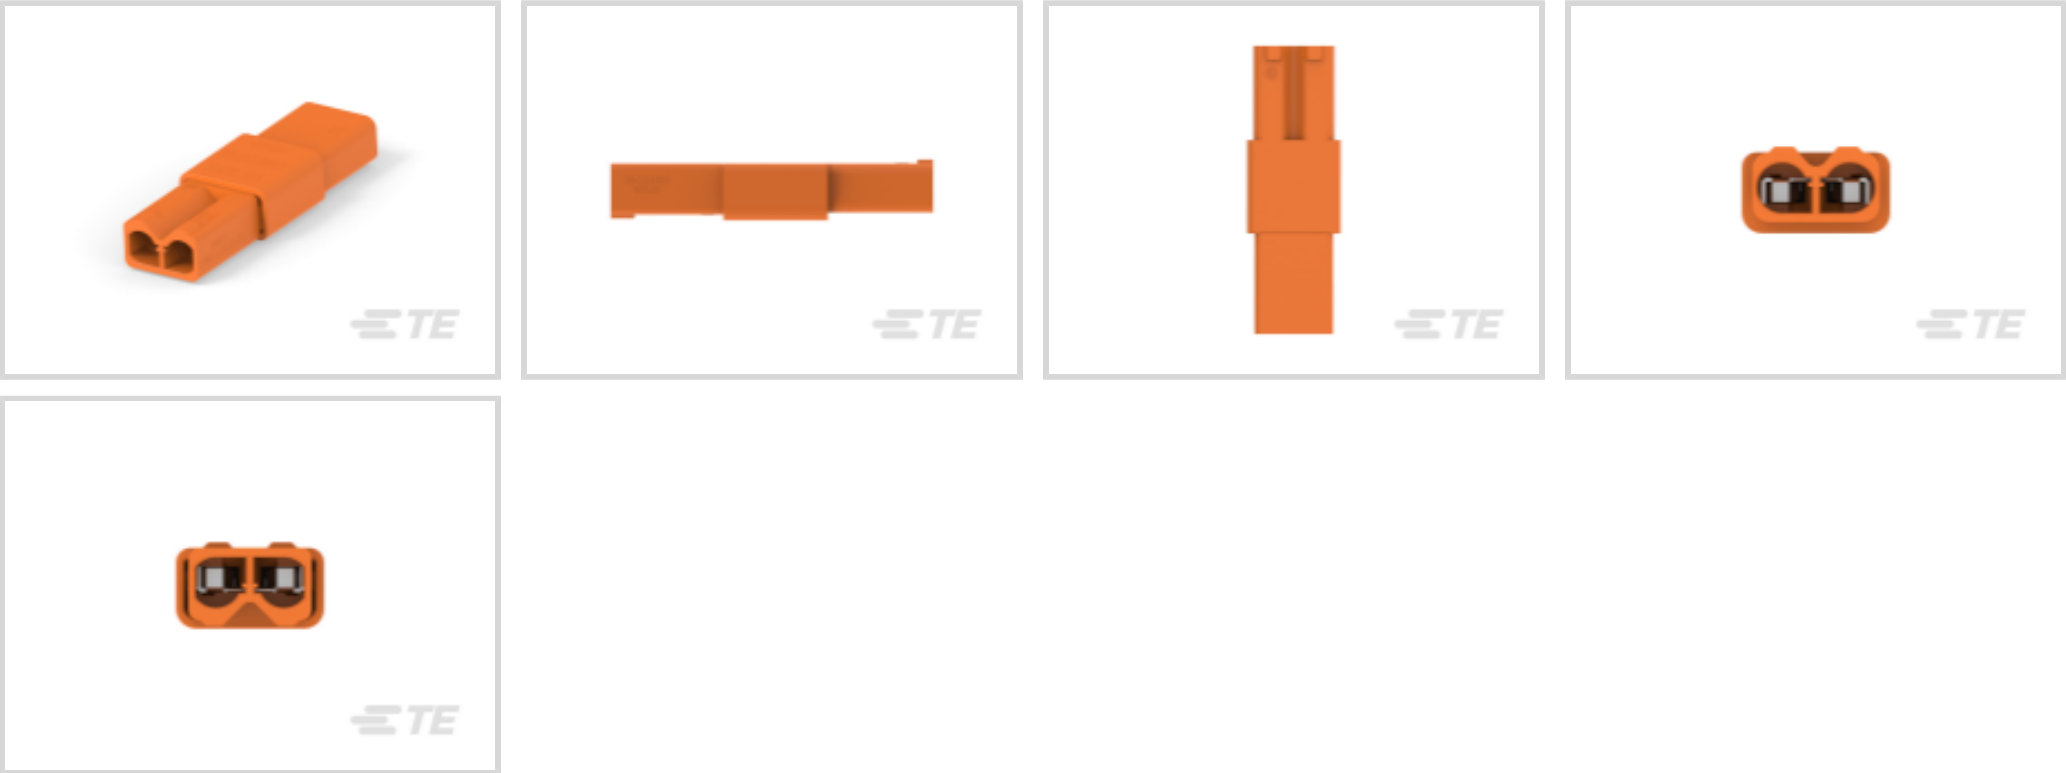

Lighting Product Type: **Connector**
Termination Method to Wire & Cable: **Poke-In**
Connector System: **Wire-to-Wire**
Number of Positions: **2**
Centerline (Pitch): **5.7 mm**

Features

Product Type Features

Lighting Product Type	Connector
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Rows	1
Number of Positions	2

Electrical Characteristics

Operating Voltage (Max)	600 VDC
-------------------------	---------

Body Features

Primary Product Color	Orange
-----------------------	--------

Contact Features

Contact Current Rating (Max)	3 A
------------------------------	-----

Termination Features



Termination Method to Wire & Cable	Poke-In
------------------------------------	---------

Mechanical Attachment

Mating Alignment	With
------------------	------

Housing Features

Centerline (Pitch)	5.7 mm
--------------------	--------

Dimensions

Connector Length	40 mm
Connector Height	7.75 mm
Connector Width	13.3 mm
Wire Size	18 - 22 AWG

Usage Conditions

Operating Temperature Range	-40 - 105 °C
-----------------------------	--------------

Industry Standards

Compatible With Approved Standards Products	UL 2459
UL Flammability Rating	UL 94V-0

Packaging Features

Packaging Quantity	250
Packaging Method	Loose Piece

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Melamine (3% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free




Solder Process Capability

Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # 8-2834006-2
2P MRPK CONN_BK/WE




TE Part # 2324697-2
PUSH GRIP CONNECTOR 2P



TE Part # 4-2213480-1
LUMAWISE Z50 HOLDER 2828 LEDIL




TE Part # CAT-L97-L4981C
Mini LED Holders Z35



TE Part # CAT-L97-L4981B
LED Holders, Z45

Also in the Series | LIGHT-N-LOK Ballast Connector



Ballast Connectors(39)

Customers Also Bought



TE Part # 282837-2
TERMI-BLOK PCB MOUNT 2P

TE Part # 2213194-1
LUMAWISE LED HOLDER OPTIC CLIP Z50 TYPE1

TE Part # 1445022-2
MICRO MNL RECEPT HSG SINGLE R

TE Part # 1909763-1
UMCC MICRO-COAX RECPT GEN 1 HIGHER LEVEL

TE Part # 3-826947-6
36P MOD2 STIFT LEI

TE Part # 2-2176326-0
CRGP 0603 390R 1%

TE Part # 1SNA165113R1600
M4/6.P

Documents

Product Drawings

2PIN WIRE TO WIRE CONNECTOR

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2271203-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2271203-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2271203-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

LIGHT-N-LOK Standard Connectors

English

LIGHT-N-LOK Brochure

English

Product Specifications

Application Specification

English



Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

UL Report

English