



Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings > Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V



Connector Product Type: **Housing**

Connector & Housing Type: **Housing for Male Terminals**

Connector System: **Wire-to-Wire**

Number of Positions: **20**

Centerline (Pitch): **5.08 mm [.2 in]**

[All Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V \(64\)](#)

Features

Product Type Features

Connector Product Type	Housing
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	20
Number of Rows	2

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

--	--



Contact Type	Tab
--------------	-----

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Mating Retention	With
Connector Mounting Type	Panel Mount

Housing Features

Housing Material	PBT
Centerline (Pitch)	5.08 mm[.2 in]

Dimensions

Connector Length	78.23 mm[3.07 in]
Connector Height	20.32 mm[.8 in]
Connector Width	33.6 mm[1.32 in]
Row-to-Row Spacing	7.62 mm[.299 in]

Usage Conditions

Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Quantity	288
Packaging Method	Carton

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # CAT-D9934-A75

Contact: Component To Wire; 15A, 28-14 wire size


Also in the Series | Dynamic 3000 Series




Connector Contacts(94)




Connector Hardware(8)




Insertion & Extraction Tools(2)

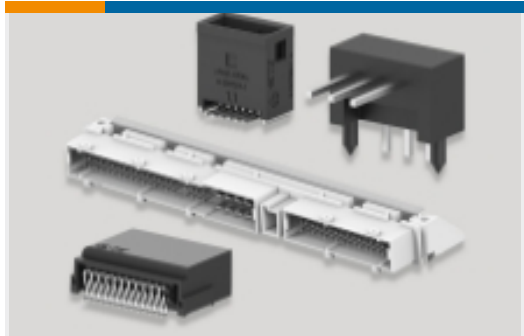


PCB Headers & Receptacles(283)

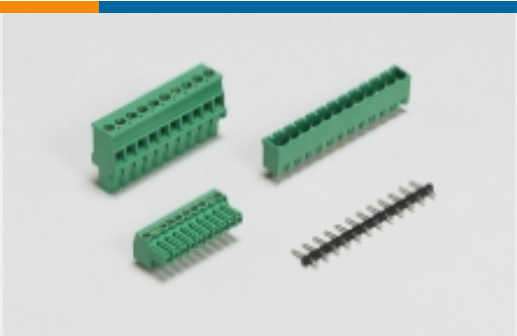

PCB Terminal Blocks(25)



Standard Rectangular Connectors(2)



Wire-to-Board Connector Assemblies & Housings(152)

Customers Also Bought



TE Part # 178289-8
DYNAMIC D3100 REC HSG 20P

TE Part # 1-179555-6
Receptacle and Tab Housing: 5.08 mm Pitch, 250-600V

TE Part # 175286-2
DYNAMIC D-3 TAB CONT. L AU 0.38

TE Part # 3-175363-1
Receptacle and Tab Housing: 5.08 mm pitch, 600V

TE Part # 1-171432-2
FF 312 REC HSG 6P NYLON RED

TE Part # 1-171433-9
FF TAB HSG 6P NYLON BLACK

TE Part # 171190-1
FF 250 TAB HSG 6P NYLON NAT

Documents

Product Drawings

DYNAMIC 3200 TAB HSG 20P

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-179555-8_S.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-179555-8_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-179555-8_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Instruction Sheets

Instruction Sheet (U.S.)

English

Agency Approvals

TUV Certificate

1-179555-8

Housing, Housing for Male Terminals, Wire-to-Wire, 20 Position, .2 in [5.08 mm]
Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series



English