

6376608-1 ACTIVE

AMPMODU | Micro Stack


TE Internal #: 6376608-1

PCB Mount Receptacle, Vertical, Board-to-Board, 80 Position, .6 mm [.023 in] Centerline, Gold, Surface Mount, Signal, Black, Tray, Micro Stack

[View on TE.com >](#)



Connectors > PCB Connectors > PCB Headers & Receptacles

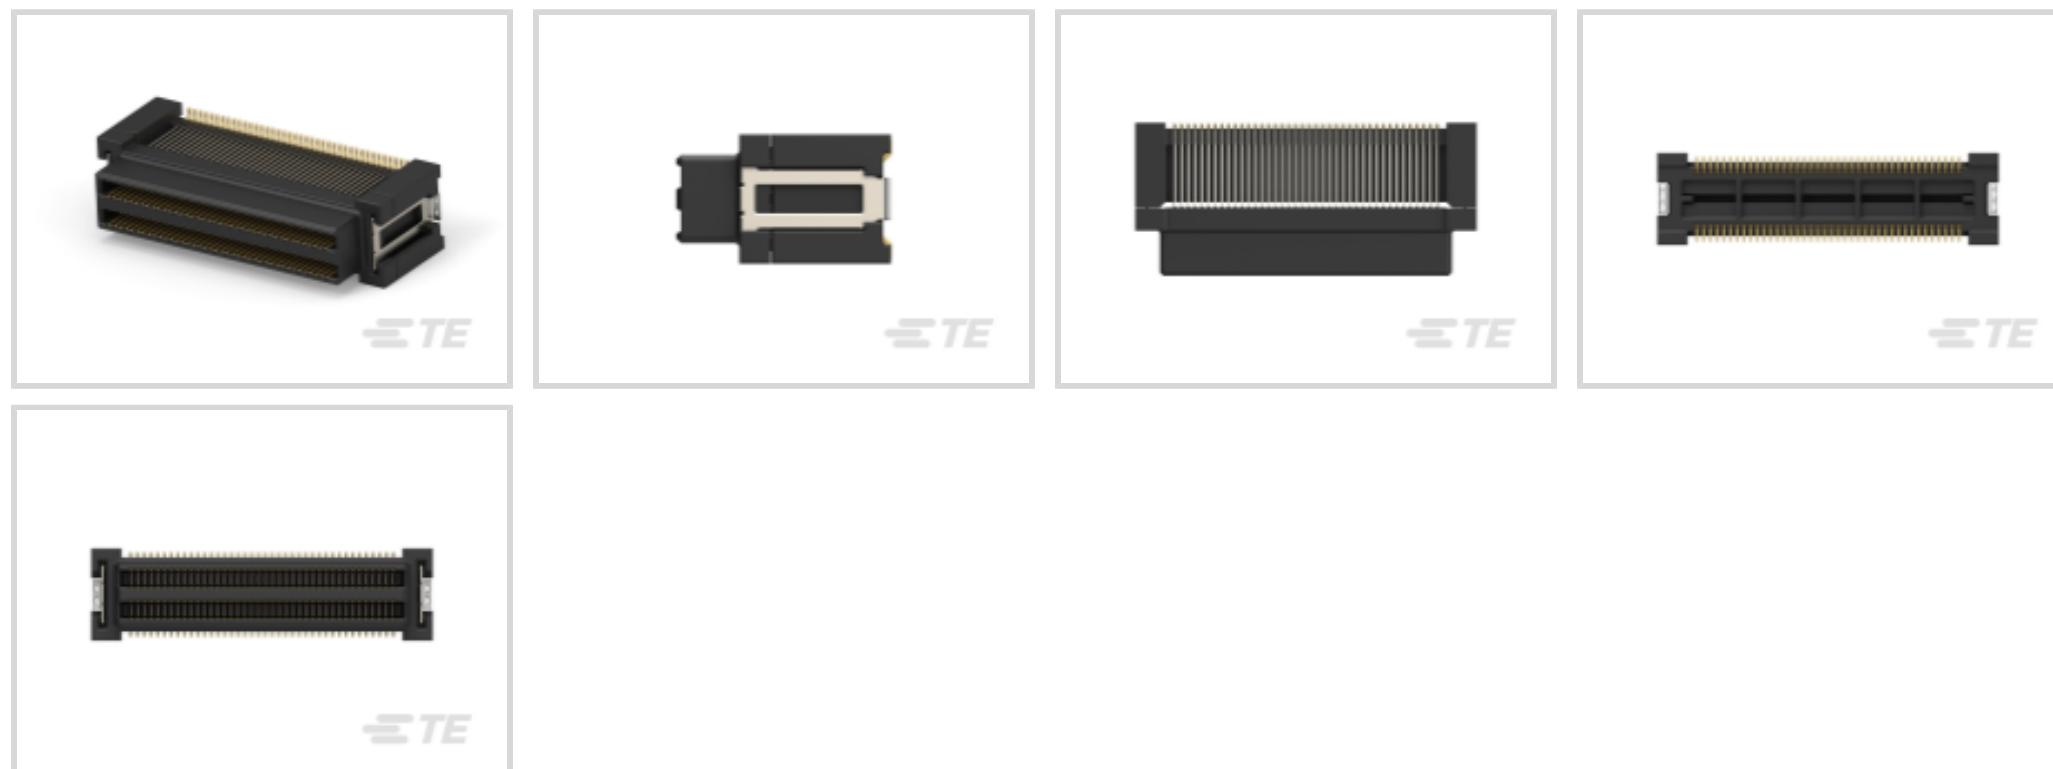

PCB Connector Assembly Type: **PCB Mount Receptacle**

PCB Mount Orientation: **Vertical**

Connector System: **Board-to-Board**

Number of Positions: **80**

Centerline (Pitch): **.6 mm [.023 in]**

Features

Product Type Features

PCB Connector Assembly Type	PCB Mount Receptacle
Connector System	Board-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Stackable	Yes
PCB Mount Orientation	Vertical
Number of Positions	80
Board-to-Board Configuration	Parallel

Electrical Characteristics

Operating Voltage	10 VAC
-------------------	--------

Body Features

Primary Product Color	Black
-----------------------	-------

Contact Features

PCB Contact Termination Area Plating Material Thickness	.3 µm[31.5 µin]
PCB Contact Termination Area Plating Material	Gold Flash
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	.3 µm
Contact Type	Socket
Contact Current Rating (Max)	.5 A

Termination Features

Rectangular Termination Post & Tail Thickness	.25 mm[.01 in]
Rectangular Termination Post & Tail Width	1 mm[.04 in]
Termination Method to Printed Circuit Board	Surface Mount

Mechanical Attachment

PCB Mount Alignment Type	Solder Peg
PCB Mount Retention Type	Solder Peg
Mating Alignment	With
Mating Alignment Type	Chamfered Edges
PCB Mount Retention	With
PCB Mount Alignment	With
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Top
Centerline (Pitch)	.6 mm[.023 in]
Housing Material	LCP (Liquid Crystal Polymer)

Dimensions

Connector Height	13.6 mm[.53 in][.535 in]
PCB Thickness (Recommended)	1.6 mm

Usage Conditions

Operating Temperature Range	-55 - 85 °C[-67 - 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Flammability Rating

UL 94V-0

Packaging Features

Packaging Quantity

45

Packaging Method

Tray

Product ComplianceFor compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024

(240)

Candidate List Declared Against: JAN 2024

(240)

Does not contain REACH SVHC

Halogen Content


Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

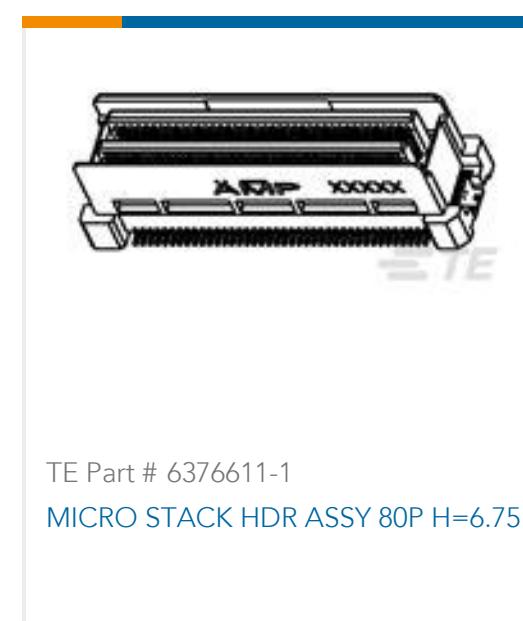Compatible PartsTE Part # 6376609-1
MICRO STACK HDR ASSY 8OP H=20TE Part # 6376610-1
MICRO STACK HDR ASSY 8OP H=9TE Part # 6376611-1
MICRO STACK HDR ASSY 8OP H=7.5TE Part # 1554218-2
MICRO STACK HDR ASSY 8OP H=16
WITH TAPE



TE Part # 6376611-2
MICRO STACK HDR ASSY 80P H6.75

Also in the Series | Micro Stack



PCB Headers & Receptacles(13)

Customers Also Bought



TE Part # 1318126-1
DYNAMIC D2100 HDR V ASSY 12P



TE Part # 1-917659-6
DYNAMIC 3200 D/ROW REC HSG 12P



TE Part # 1-1827875-2
**DYNAMIC 1200D HDR ASSY V 4P X
 BLACK GOLD**



TE Part # 1-1123723-4
3.96 EP HDR ASSY 4P(NATURAL)



TE Part # 2-1393030-2
**SSRT-240D25 = PANEL MOUNT,25A,
 240VAC**

Documents

Product Drawings

MICRO STACK REC ASSY 80P

English

CAD Files

3D PDF

3D

Customer View Model[ENG_CVM_CVM_6376608-1_L.2d_dxf.zip](#)

English

Customer View Model[ENG_CVM_CVM_6376608-1_L.3d_igs.zip](#)

English

Customer View Model[ENG_CVM_CVM_6376608-1_L.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Product Specifications****Product Specification**

Japanese