

1534120-1

✓ ACTIVE

AMP | MQS

TE Internal #: 1534120-1

Housing for Female Terminals, Wire-to-Board, 6 Position, .098 in [2.5 mm] Centerline, Black, Wire & Cable, Signal, Cable Mount (Free-Hanging), MQS

[View on TE.com >](#)

Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING



Connector System: **Wire-to-Board**

Number of Positions: **6**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **2.5 mm [.098 in]**

Sealable: **No**

[All MQS, CONNECTOR HOUSING \(435\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Board
Connector & Housing Type	Housing for Female Terminals
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	On the Terminal

Configuration Features

Number of Positions	6
Number of Rows	2

Electrical Characteristics

Operating Voltage	12 VDC
-------------------	--------

Nominal Voltage Architecture 12 V, 24 V

Body Features

Cable Exit Angle 180°

Primary Product Color Black

Connector & Keying Code Neutral

Contact Features

Contact Size .63mm

Contact Type Receptacle

Mating Tab Width .63 mm[.025 in]

Contact Current Rating (Max) 7.5 A

Mechanical Attachment

Terminal Position Assurance Yes

Strain Relief Without

Mating Alignment Type Polarized

Mating Alignment With

Connector Mounting Type Cable Mount (Free-Hanging)

Housing Features

Housing Material PBT GF15

Centerline (Pitch) 2.5 mm[.098 in]

Dimensions

Connector Height 6.8 mm[.268 in]

Product Width 16.5 mm[.65 in]

Product Length 9.2 mm[.362 in]

Row-to-Row Spacing 4.24 mm[.167 in]

Usage Conditions

Operating Temperature (Max) 120 °C[248 °F]

Operating Temperature Range -40 - 120 °C[-40 - 248 °F]

Operation/Application

Circuit Application Signal

Industry Standards

UL Flammability Rating UL 94HB

Packaging Features

Packaging Quantity	8000
--------------------	------

Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
-------------	-----

Connector Position Assurance Capable	No
--------------------------------------	----

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-M8793-T273
MQS, RECEPTACLE AND TABTE Part # 1-1534121-1
MQS ABDECKKAP6P,SWTE Part # 1-1534121-3
MQS ABDECKKAP6P,RTTE Part # 1-1534121-2
MQS ABDECKKAP6P,BRTE Part # 1-1534121-5
MQS ABDECKKAP6P,BL

Also in the Series

MQS




Automotive Connector Caps & Covers (113)




Automotive Connector EMC Shielding (3)




Automotive Connector Locks & Position Assurance(26)

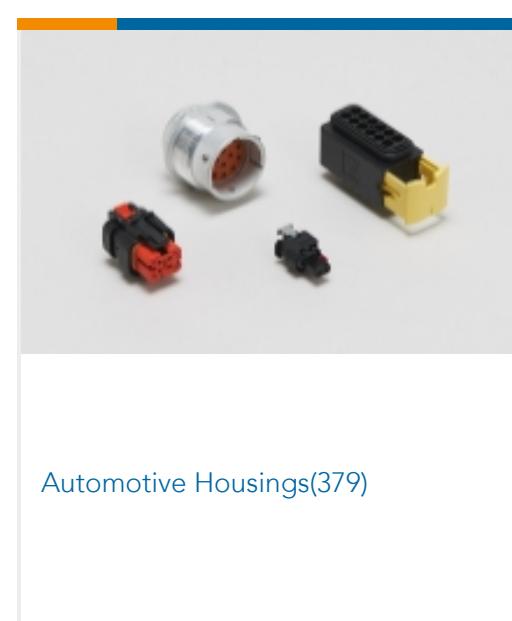


Automotive Housings(379)

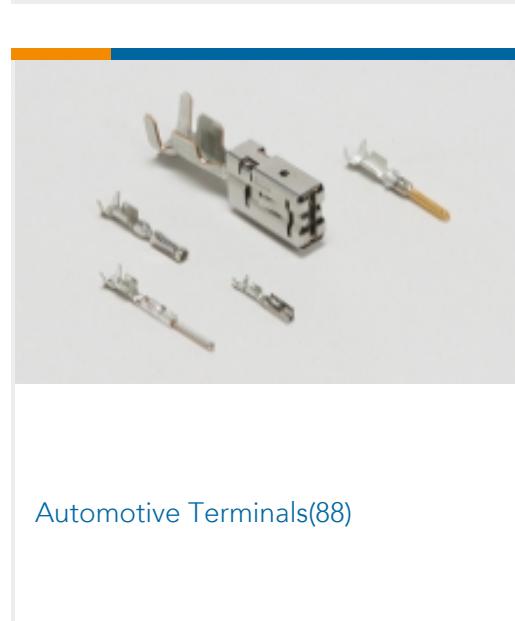


Automotive Terminals(88)

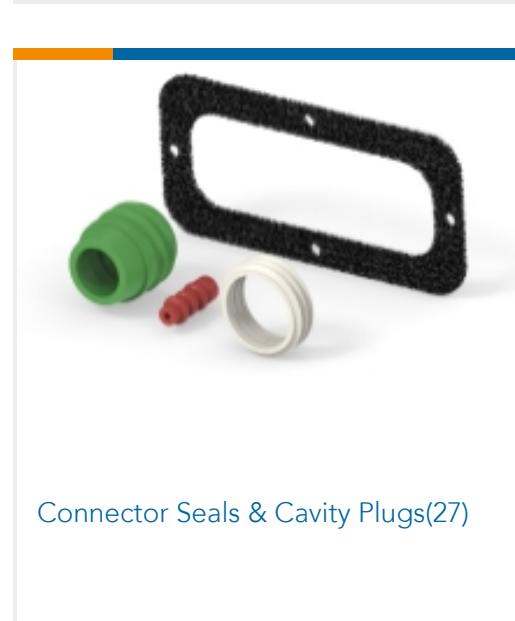

Connector Seals & Cavity Plugs(27)

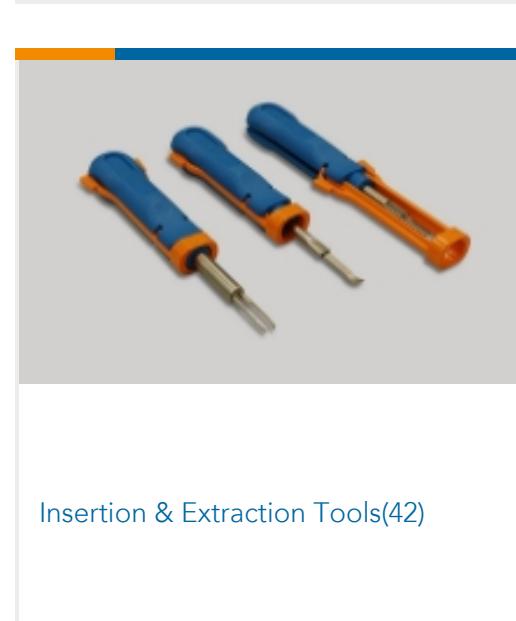

Insertion & Extraction Tools(42)

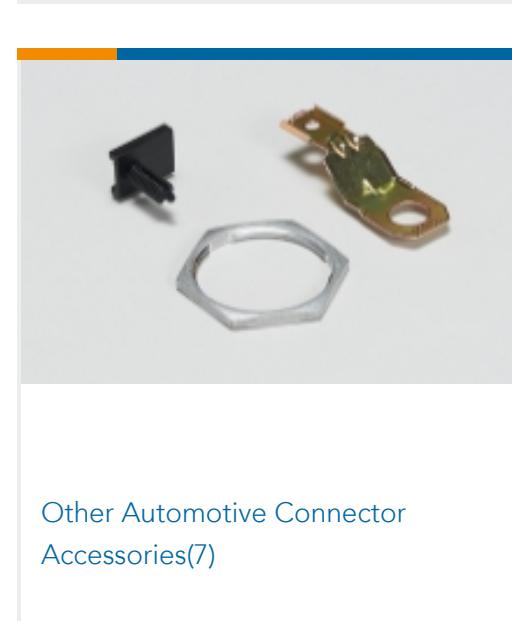


Other Automotive Connector Accessories(7)



PCB Headers & Receptacles(143)

Customers Also Bought

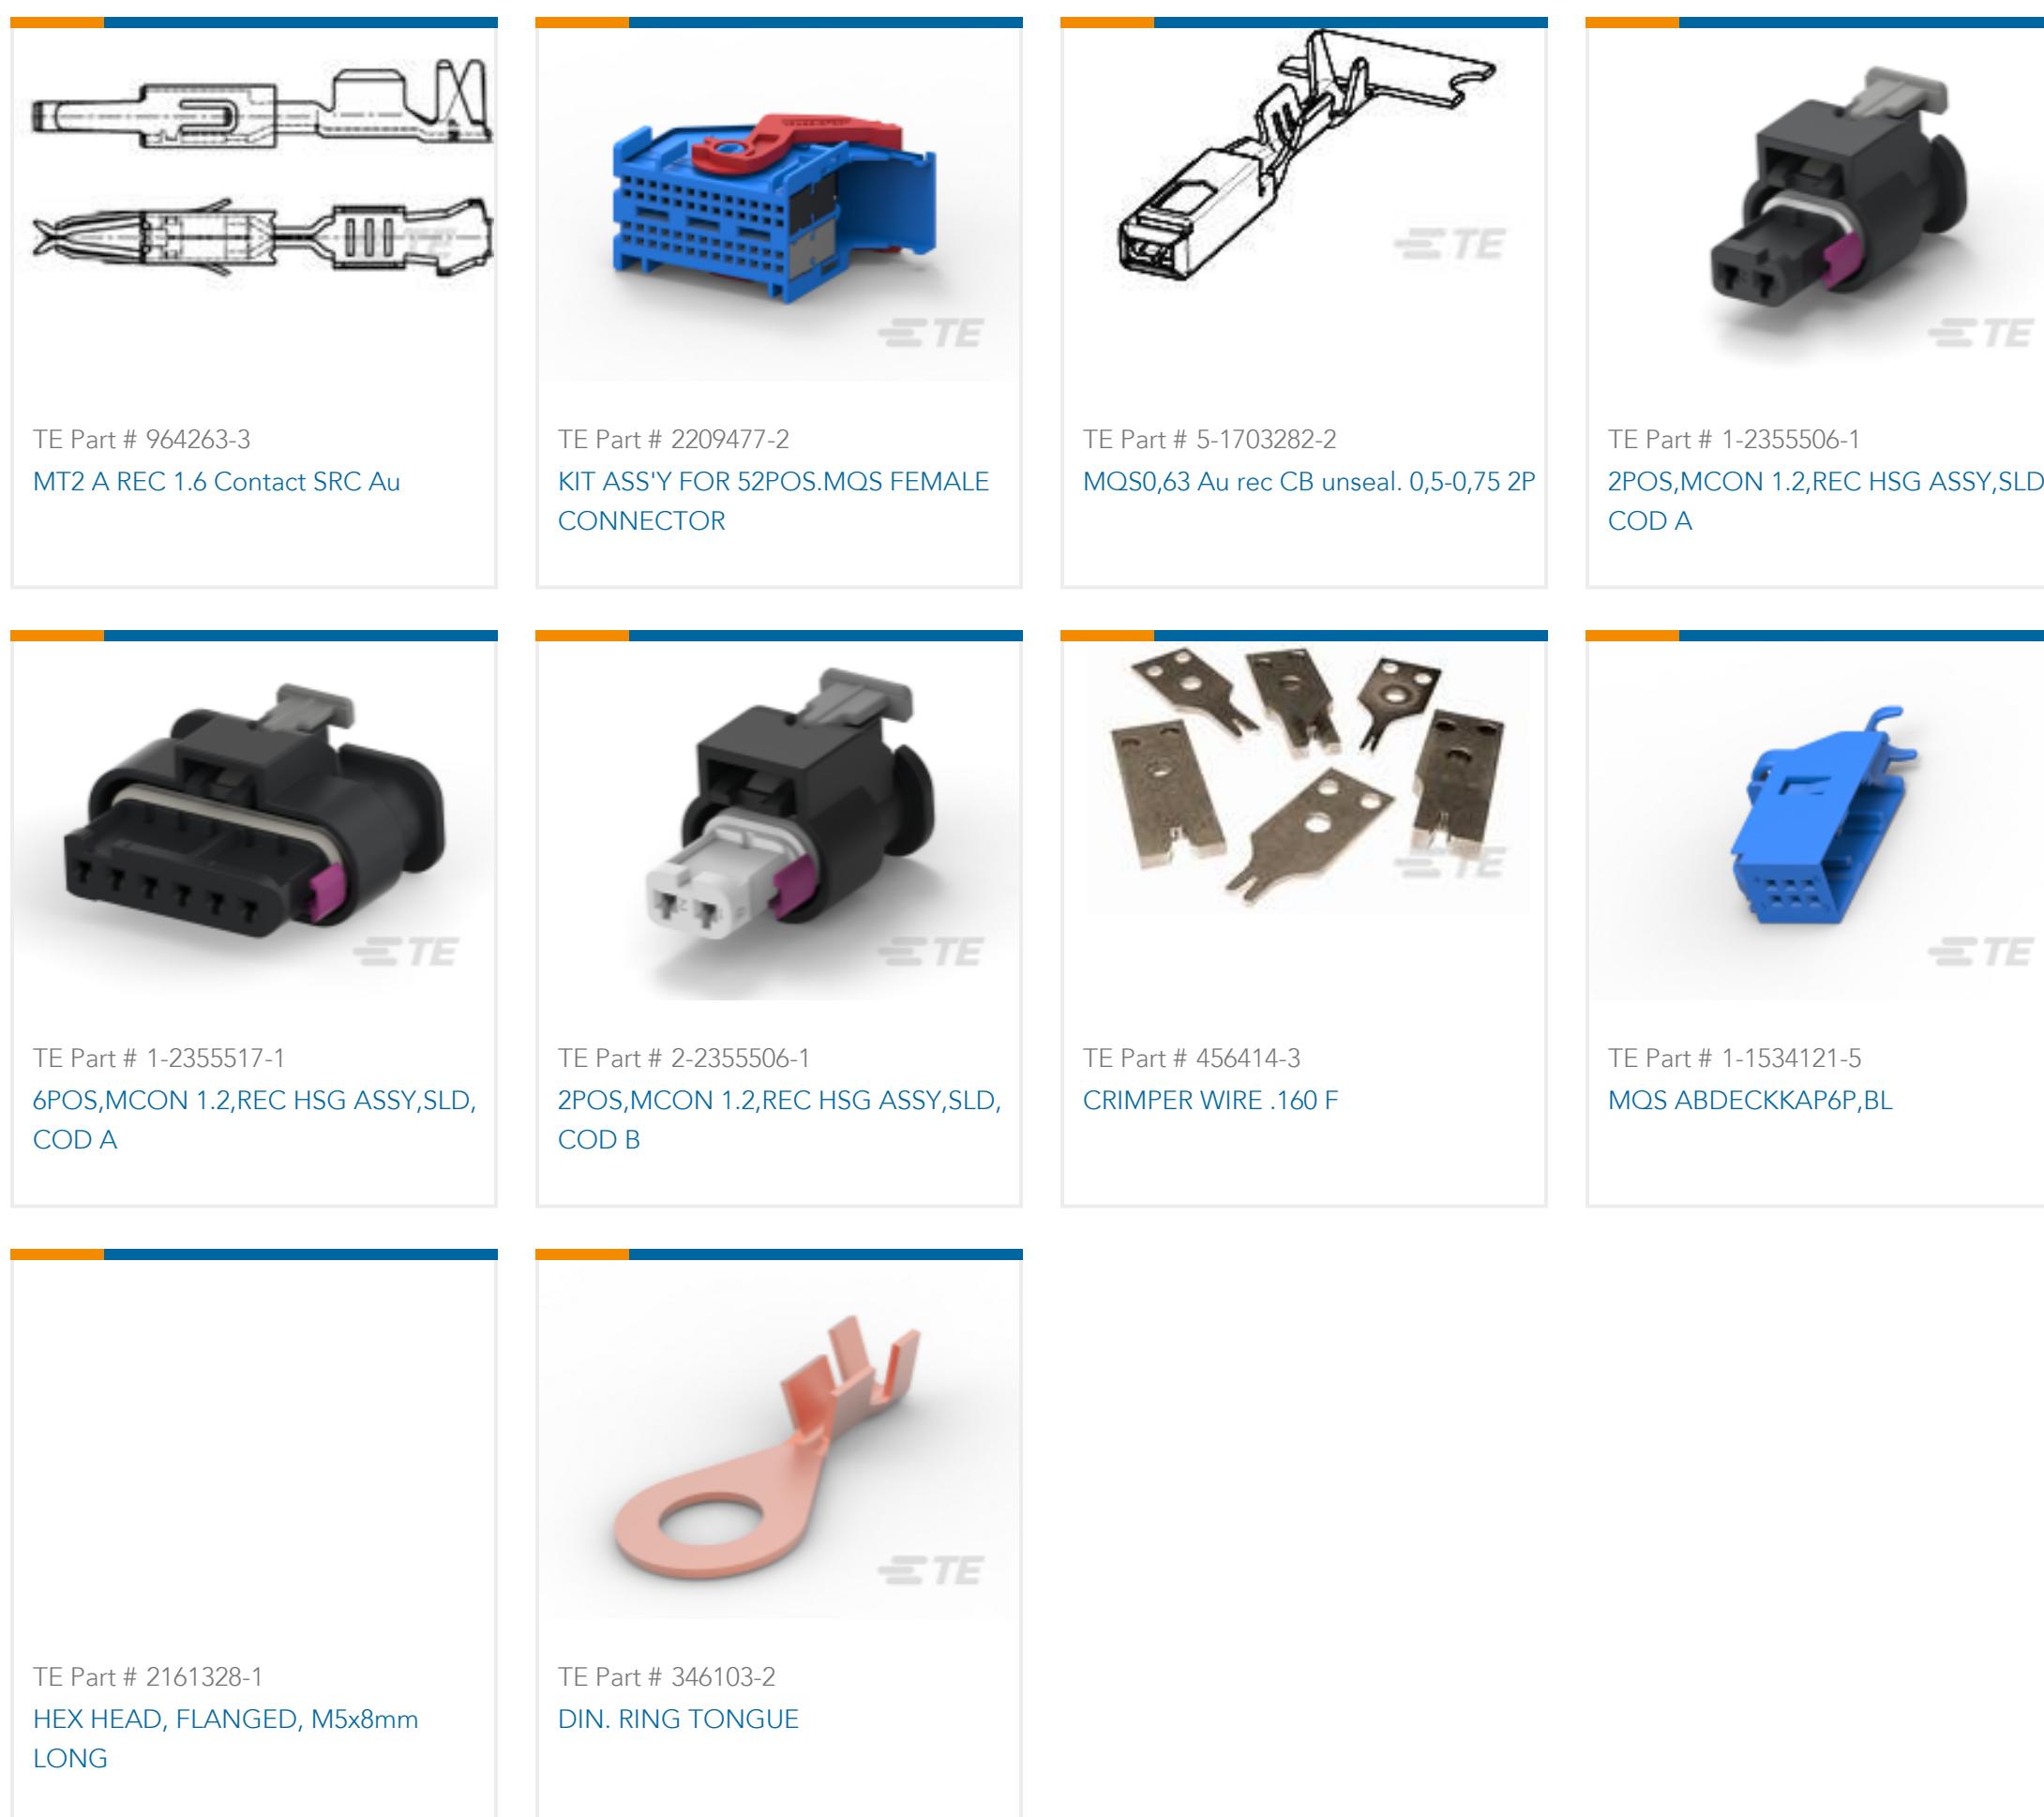

Documents

Product Drawings

6POS MQS REC

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1534120-1_A.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1534120-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1534120-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Micro Quadlok Interconnection System (MQS)

English

[Product Specifications](#)

[Application Specification](#)

English