

1-747563-0 ✓ ACTIVE

AMPLIMITE | AMPLIMITE HDE

TE Internal #: 1-747563-0

IDC D-Sub Connectors, Plug, 26 - 22 AWG Solid Wire Size, .13 - .32 mm² Solid Wire Size, Shielded, Cable-to-Cable, 37 Position, AMPLIMITE HDE

[View on TE.com >](#)



Connectors > D-Shaped Connectors > D-Sub Connectors > IDC D-Sub Connectors > IDC D-Sub: Connector Kit, Plug, Wire to Wire, Signal, 2.77 mm



Connector & Housing Type: **Plug**

Solid Wire Size: **26 - 22 AWG**

Shielded: **Yes**

Connector System: **Cable-to-Cable**

[All IDC D-Sub: Connector Kit, Plug, Wire to Wire, Signal, 2.77 mm \(17\)](#)

Features

Product Type Features

Shell Material Configuration	Front Metal Shell
Ground Feature Type	Grounding Indents
Connector & Housing Type	Plug
Connector System	Cable-to-Cable
Connector Product Type	Connector Kit
Connector Shell Size	4
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	37
Number of Rows	2
Compatible With Wire & Cable Type	Discrete Wire, Round Jacketed Cable

Body Features

Insert Material	Thermoplastic
-----------------	---------------



Cable Exit Angle	180°
------------------	------

Shield Plating Material	Tin
-------------------------	-----

Shield Material	Steel
-----------------	-------

Shell Plating Material	Tin
------------------------	-----

Contact Features

Contact Options	Installed
-----------------	-----------

Contact Type	Pin
--------------	-----

Wire Contact Termination Area Plating Material	Tin
------------------------------------------------	-----

Contact Mating Area Plating Material	Gold Flash
--------------------------------------	------------

Contact Underplating Material	Nickel
-------------------------------	--------

Contact Base Material	Phosphor Bronze
-----------------------	-----------------

Contact Size	Size 20
--------------	---------

Contact Current Rating (Max)	5 A
------------------------------	-----

Termination Features

Termination Method to Wire & Cable	Insulation Displacement (IDC)
------------------------------------	-------------------------------

Mechanical Attachment

Mating Retention	With
------------------	------

Wire Insulation Support	With
-------------------------	------

Mating Retention Type	Mounting Holes
-----------------------	----------------

Thread Size	4-40 UNC 2B
-------------	-------------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Shell Material	Steel
----------------	-------

Centerline (Pitch)	1.38 mm[.054 in]
--------------------	------------------

Dimensions

Accepts Cable Diameter (Max)	14.27 mm[.562 in]
------------------------------	-------------------

Accepts Cable Insulation Diameter Range	8.59 - 14.28 mm[.338 - .562 in]
-----------------------------------------	---------------------------------

Compatible Insulation Diameter Range	1.52 mm[.06 in]
--------------------------------------	-----------------

Solid Wire Size	26 - 22 AWG
-----------------	-------------

Wire Size	.15 - .4 mm ²
-----------	--------------------------

Usage Conditions

Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]
-----------------------------	----------------------------



Operation/Application

Circuit Application	Signal
Shielded	Yes

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	1
Packaging Method	Package

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-023-DRARS4277
D-Sub Receptacle Assembly: Right Angle, Shell Size 4, 2.77mm



TE Part # CAT-025-DRAVS4277
D-Sub Receptacle Assembly: Vertical, Shell Size 4, 2.77mm



TE Part # 58074-1
MTA 50/100/156 MANUAL TOOL FRAME



TE Part # CAT-026-RAVSAP4277
D-Sub Receptacle Assembly: Vertical, Action Pin, Shell Size 4, 2.77mm



TE Part # 747564-9
KIT, RCPT, 37P, HDE, SHLD HDWRE




TE Part # 1-745497-7
RCPT ASSY, 37P, HDE, MS




TE Part # 608868-1
HDE HT PKG FOR SUB D

Also in the Series | AMPLIMITE HDE

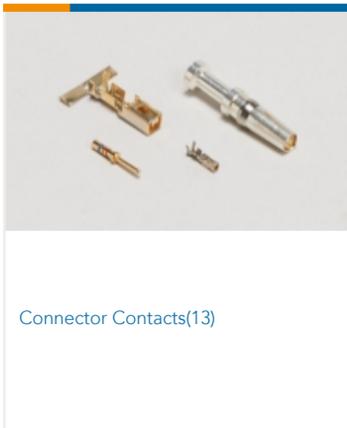


Connector Contacts(13)

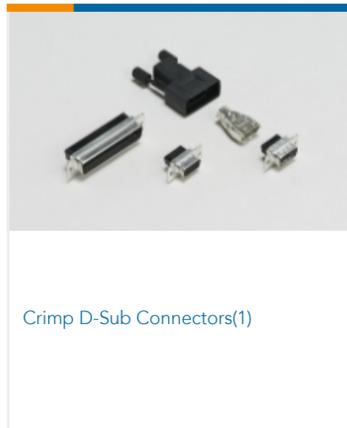

Crimp D-Sub Connectors(1)



IDC D-Sub Connectors(75)

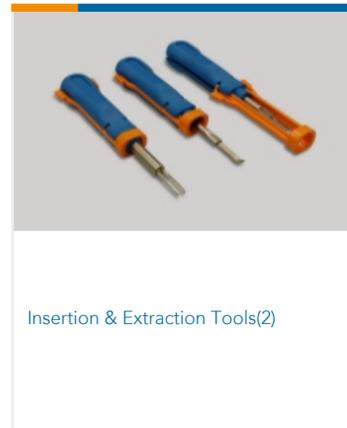

Insertion & Extraction Tools(2)

Customers Also Bought



TE Part # 206037-1
CPC PLUG ASSEMBLY SIZE 17-16



TE Part # 1-66361-4
Pin and Socket Contacts, Type III, LP, High Current



TE Part # 36152
PIDG R 22-16 COMM 22-18 MIL 6



TE Part # 2-520182-2
ULTRAFast 187 ASSY REC 22-18 TPBR LP



TE Part # 1838275-2
M12 Fld Ser CONN. Male Pin Sld



TE Part # 1838891-2
M12 MtI FEMALE PNL CONN. Sldr Rear (Hex)



TE Part # 1-2176342-7
CRGCO 0805 470R 5%



TE Part # 2-1623728-3
BCHE 11 W 4K7 5%



Documents

Product Drawings

[KIT,PLUG,37P,HDE,SHLD HDWRE](#)

English

CAD Files

[3D PDF](#)

3D

[Customer View Model](#)

[ENG_CVM_CVM_1-747563-0_K.2d_dxf.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_1-747563-0_K.3d_igs.zip](#)

English

[Customer View Model](#)

[ENG_CVM_CVM_1-747563-0_K.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[AMPLIMITE Subminiature D Connectors - Cable Connectors](#)

English

[AMPLIMITE Cable Connectors and Shielding Hardware Kits QRG](#)

English

Product Specifications

[Application Specification](#)

English

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English

[Instruction Sheet \(U.S.\)](#)

English



[Agency Approvals](#)

[UL Report](#)

English