

1-794108-1

ACTIVE


MATE-N-LOK | Mini-Universal MATE-N-LOK

TE Internal #: 1-794108-1

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 24 Position, 4.14 mm [.162 in] Centerline, Printed Circuit Board, Mini-Universal MATE-N-LOK

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

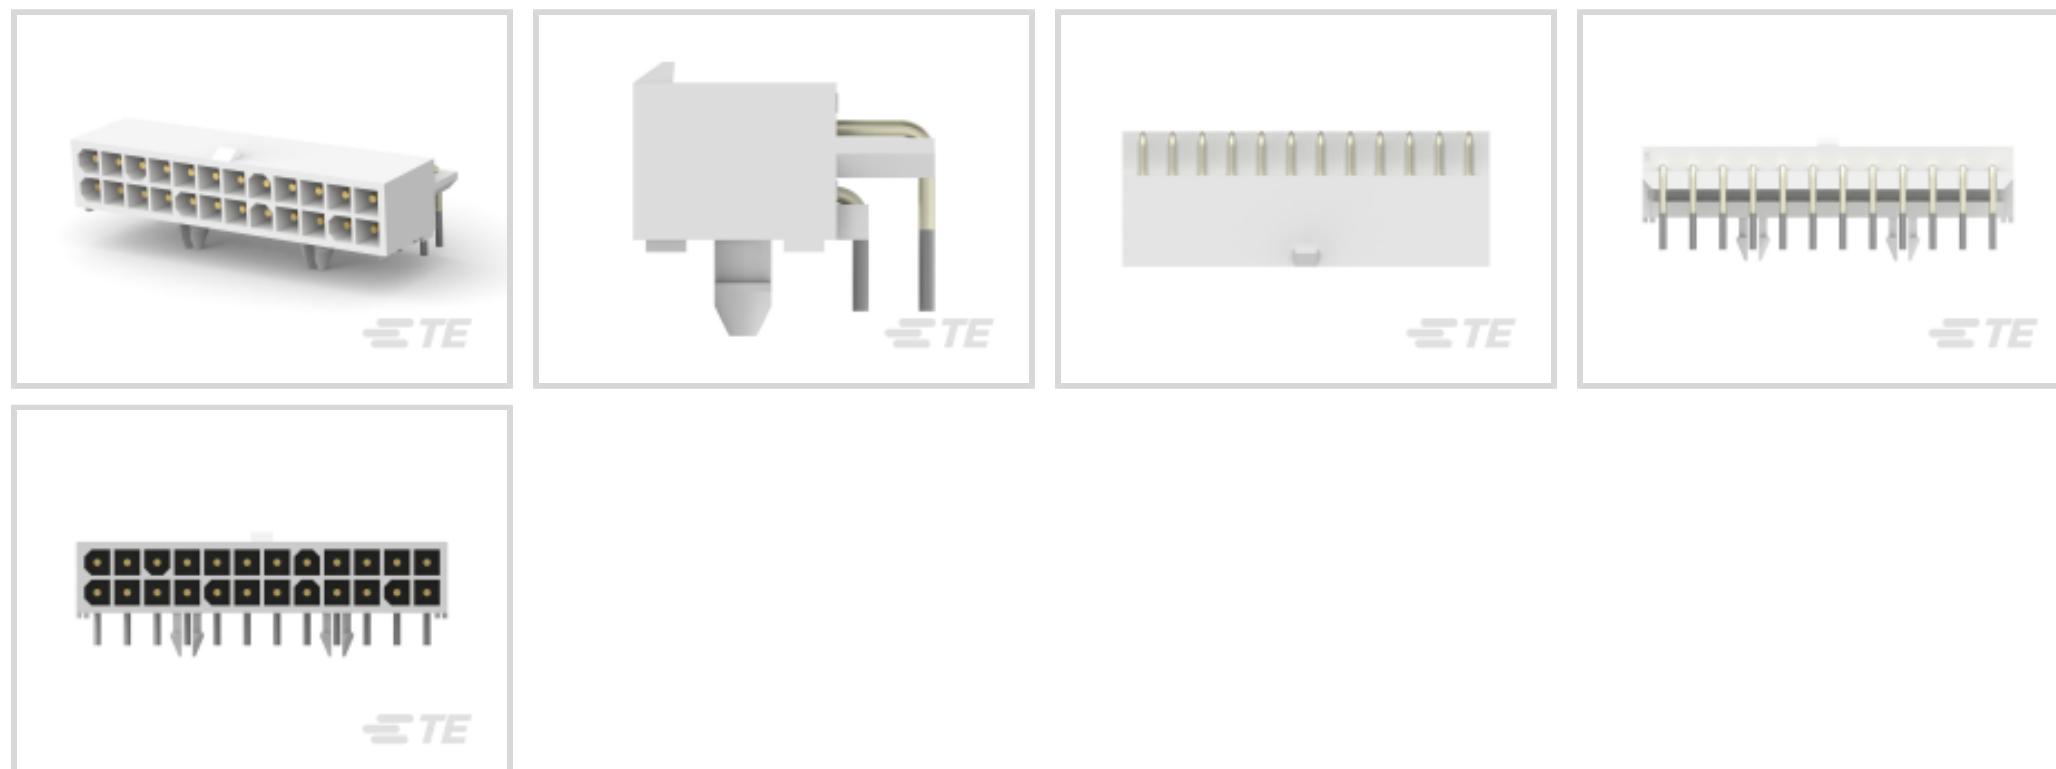

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **24**

Centerline (Pitch): **4.14 mm [.162 in]**

Features

Product Type Features

| | |
|-----------------------------------|-----------------------|
| Header Type | Fully Shrouded |
| Rectangular Power Connector Type | Header |
| Connector & Housing Type | Plug |
| Connector System | Wire-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |

Configuration Features

| | |
|----------------------------|-------------|
| Number of Positions | 24 |
| PCB Mount Orientation | Right Angle |
| Number of Power Positions | 24 |
| Number of Signal Positions | 0 |
| Number of Rows | 2 |

Electrical Characteristics

| | |
|-------------------|---------|
| Operating Voltage | 600 VDC |
|-------------------|---------|

Contact Features

| | |
|---|--|
| Multiple Contact Types | Without |
| PCB Contact Termination Area Plating Material Thickness | 3.81 μm [150 μin] |
| Contact Mating Area Plating Material | Gold |
| Contact Current Rating (Max) | 9.5 A |
| Contact Retention Within Housing | Without |
| Contact Type | Pin |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Mating Area Plating Material Thickness | .76 μm [30 μin] |

Termination Features

| | |
|---|-----------------------|
| Termination Post & Tail Length | 3.69 mm[.145 in] |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| | |
|--------------------------|-----------------|
| Strain Relief | Without |
| Mating Alignment Type | Chamfered Edges |
| Mating Retention | With |
| Mating Alignment | With |
| PCB Mount Alignment | Without |
| Panel Mount Feature | Without |
| PCB Mount Retention | With |
| PCB Mount Retention Type | Boardlock |
| Mating Retention Type | Locking Tab |
| Connector Mounting Type | Board Mount |

Housing Features

| | |
|--------------------|------------------|
| Centerline (Pitch) | 4.14 mm[.162 in] |
| Housing Color | White |
| Housing Material | Thermoplastic |

Dimensions

| | |
|-----------------------------|------------------|
| PCB Thickness (Recommended) | .06 mm[1.57 in] |
| Row-to-Row Spacing | 4.14 mm[.163 in] |

Usage Conditions

| | |
|-----------------------------|----------------------------|
| Operating Temperature Range | -55 - 105 °C[-67 - 221 °F] |
|-----------------------------|----------------------------|

Operation/Application

Circuit Application

Power

Industry Standards

CSA Rating

Certified, LR 7189

UL Rating

Recognized

Compatible With Agency/Standards Products

CSA, UL

Compatible With Approved Standards Products

UL E28476

UL Flammability Rating

UL 94V-0

Glow Wire Rating

Standard Part - Not Glow Wire

Packaging Features

Packaging Quantity

200

Packaging Method

Bag

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024 (240)

Candidate List Declared Against: JAN 2024 (240)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 770587-1
24P MINI UMNL PLUG HSG




TE Part # 794214-1
24P MINI UMNL2 PLUG HSG UL94V0

Also in the Series


Mini-Universal MATE-N-LOK




Connector Caps & Covers(2)

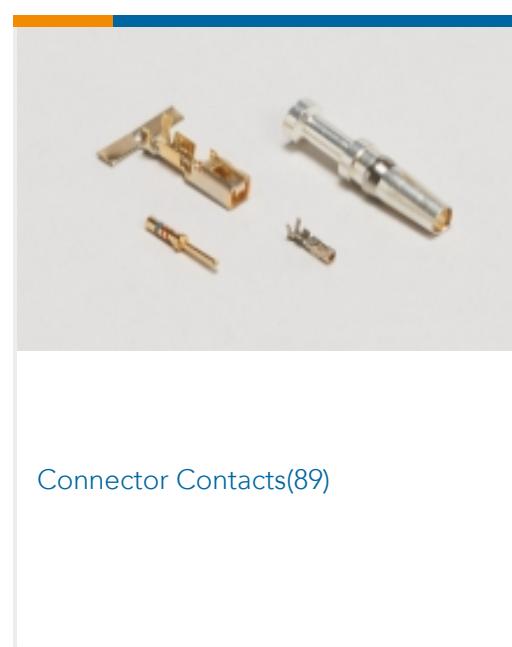


Connector Contacts(89)

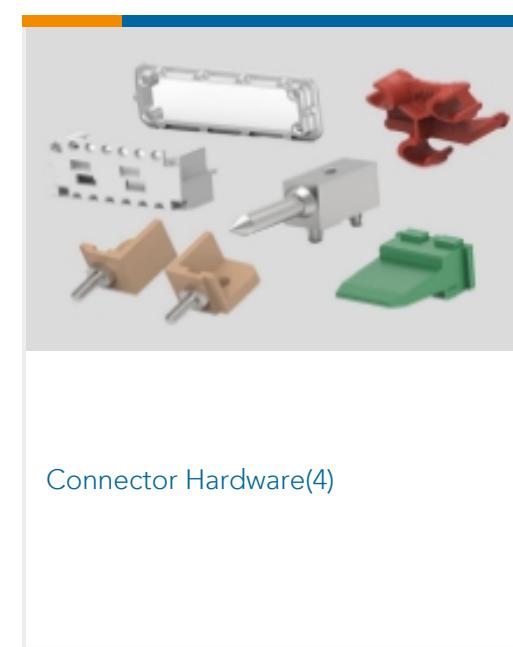


Connector Hardware(4)

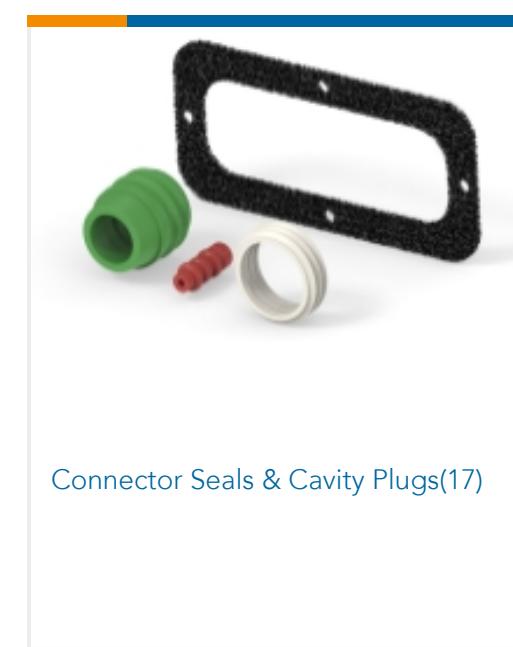

Connector Seals & Cavity Plugs(17)

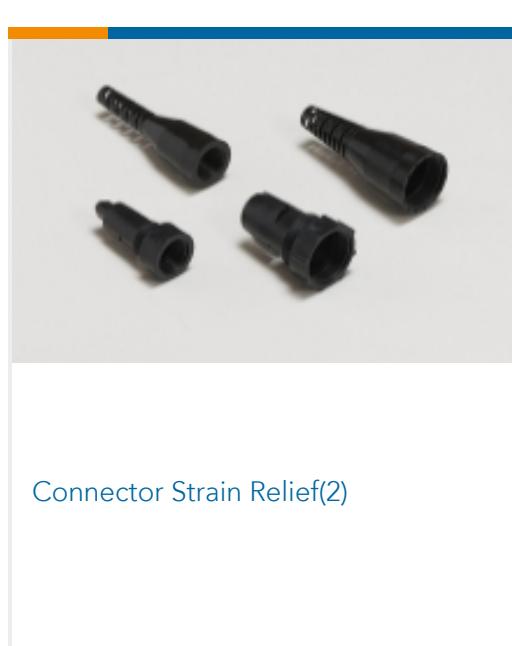

Connector Strain Relief(2)

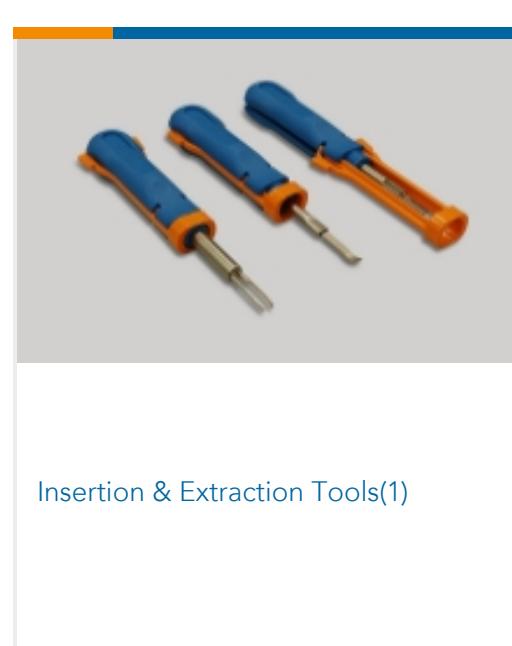

Insertion & Extraction Tools(1)



Rectangular Power Connectors(197)

Customers Also Bought



TE Part # 1-794107-0
22P MINI UMNL R/A HDR ASSY LF




TE Part # 1-794106-0
20P MINI UMNL R/A HDR ASSY



TE Part # 1-770973-0
14P MINI UMNL R/A HDR ASSY SN



TE Part # 1-794108-0
24P MINI UMNL R/A HDR ASSY SN

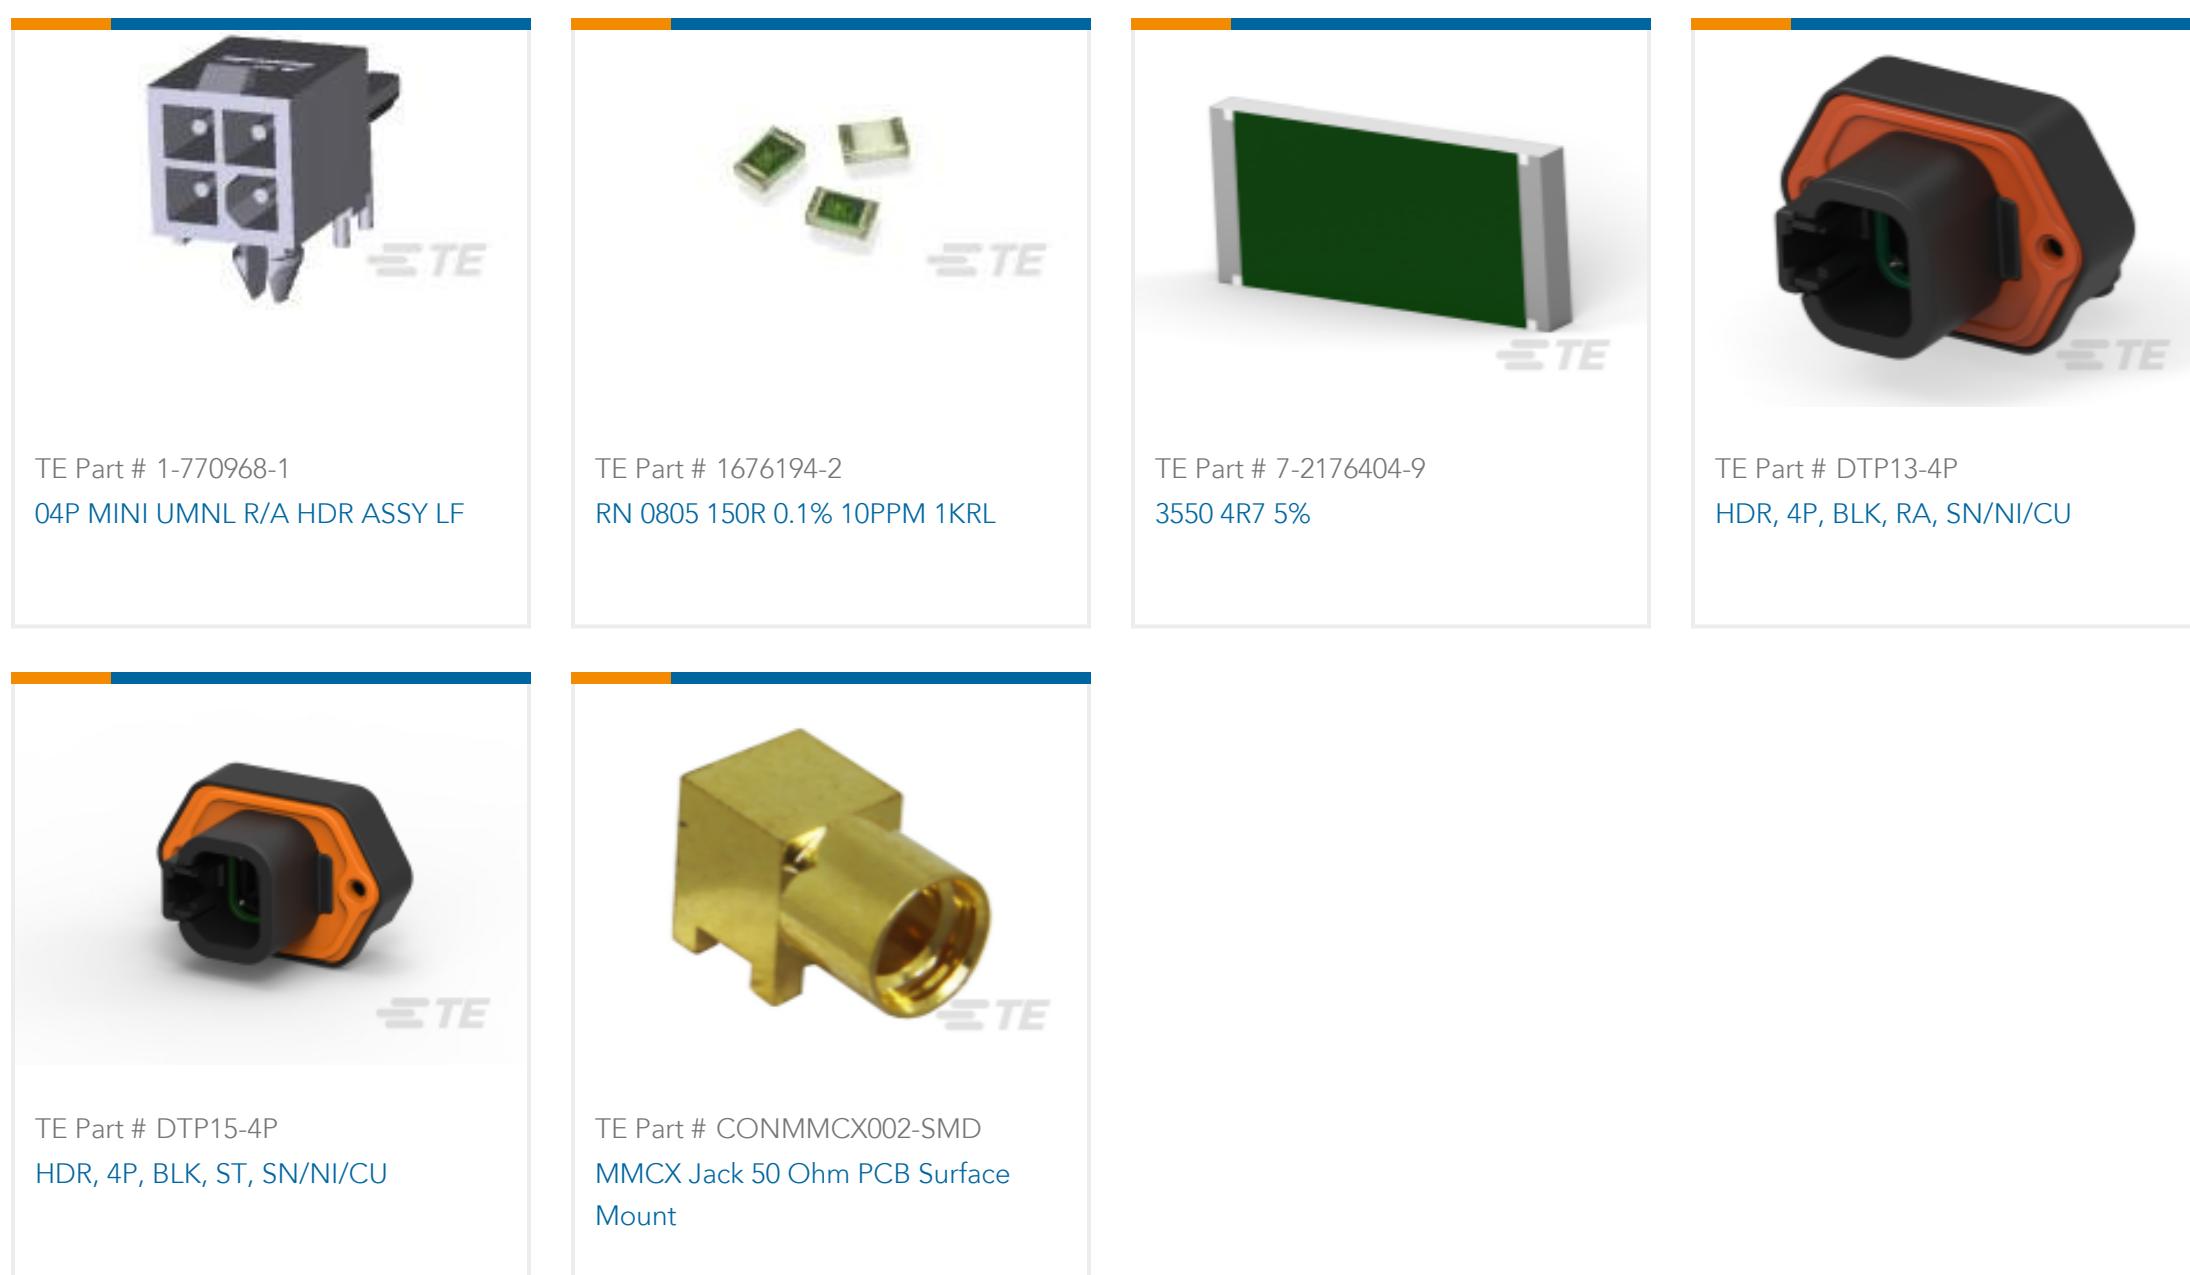

Documents

Product Drawings

24P MINI UMNL R/A HDR ASSY LF

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1-794108-1_C.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-794108-1_C.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1-794108-1_C.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English