



Connectors > Connector Accessories > Connector Seals & Cavity Plugs



Primary Product Material: **PBT**
Primary Product Color: **Yellow**
Operating Temperature (Max): **65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C [149 °F, 158 °F, 167 °F, 176 °F, 185 °F, 194 °F, 212 °F, 221 °F]**
Contains Lubricant: **No**
Operating Temperature Range: **-40 - 105 °C [-40 - 221 °F]**

Features

Body Features

Primary Product Material	PBT
Primary Product Color	Yellow

Usage Conditions

Operating Temperature (Max)	65 °C, 70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[149 °F][158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F]
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]

Packaging Features

Packaging Quantity	1000
Packaging Method	Bag

Other

Contains Lubricant	No
--------------------	----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	




Current ECHA Candidate List: JAN 2024 (240)
Candidate List Declared Against: JAN 2024 (240)
Does not contain REACH SVHC

Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

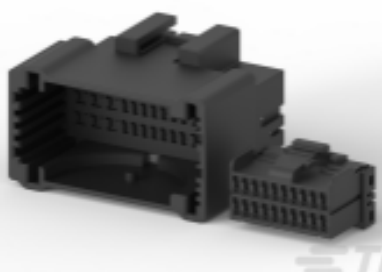

TE Part # CAT-M9194-CH8172
MULTILOCK, CONNECTOR HOUSING

Also in the Series | Multilock Connector System




Automotive Connector Caps & Covers (10)



Automotive Connector Locks & Position Assurance(3)



Automotive Housings(455)

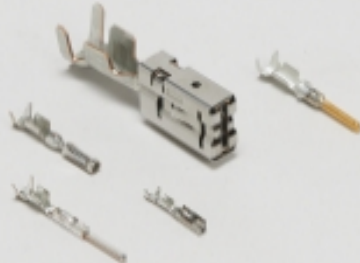

Automotive Terminals(115)



Connector Seals & Cavity Plugs(2)

Insertion & Extraction Tools(6)

Other Automotive Connector Accessories(12)

PCB Headers & Receptacles(152)

Customers Also Bought

TE Part # 1565084-1
GRACE INERTIA CONNECTOR 3.5 6P

TE Part # 170031-2
FF 250 REC 20-14AWG TPBR
REREELING

TE Part # 917309-1
MINI MLC CONN. TAB CONT.

TE Part # 2-2112780-1
18POS, MIXED,REC HSG,ASSY,
SEALED

TE Part # 2236793-3
SMARTSEAL TERMINAL

TE Part # 170014-5
FF 110 TAB 20-16AWG BR

TE Part # 696423-5
TERMINAL,PIDG PVF2 R 16-14 8

TE Part # 7-520355-0
TRIOMATE ASY V20P L=3.810,LDFR

TE Part # 2112758-1
COVER

TE Part # 170058-1
FF 110 TAB 24-20AWG BR

Documents

Product Drawings
CAVITY PLUG FOR MINI M/LOCK
English

CAD Files
3D PDF
English
Customer View Model
ENG_CVM_316390-7_A.2d_dxf.zip



English

Customer View Model

[ENG_CVM_316390-7_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_316390-7_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

CRIMPING OF MINI-MULTI-LOCK CONNECTOR CONTACTS

English