




Connectors > Automotive Connectors > Automotive Housings > MQS, CONNECTOR HOUSING

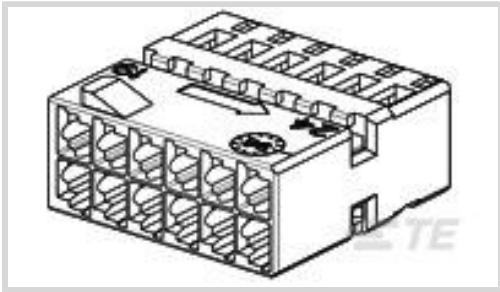

Connector System: **Wire-to-Board**

Number of Positions: **12**

Connector & Housing Type: **Housing for Female Terminals**

Centerline (Pitch): **2.54 mm [ .1 in ]**

Sealable: **No**

[All MQS, CONNECTOR HOUSING \(435\)](#)

Features

Product Type Features

|                                   |                              |
|-----------------------------------|------------------------------|
| Mixed & Hybrid Connector          | No                           |
| Connector Shape                   | Rectangular                  |
| Connector System                  | Wire-to-Board                |
| Connector & Housing Type          | Housing for Female Terminals |
| Sealable                          | No                           |
| Connector & Contact Terminates To | Wire & Cable                 |
| Primary Locking Feature           | On the Terminal              |

Configuration Features

|                     |    |
|---------------------|----|
| Number of Positions | 12 |
| Number of Rows      | 2  |

Electrical Characteristics

|                              |      |
|------------------------------|------|
| Nominal Voltage Architecture | 50 V |
|------------------------------|------|

Body Features

|                         |      |
|-------------------------|------|
| Cable Exit Angle        | 180° |
| Primary Product Color   | Gray |
| Connector & Keying Code | B    |



Contact Features

|                              |                 |
|------------------------------|-----------------|
| Contact Size                 | .63mm           |
| Contact Type                 | Receptacle      |
| Mating Tab Width             | .63 mm[.025 in] |
| Contact Current Rating (Max) | 7.5 A           |

Mechanical Attachment

|                             |                            |
|-----------------------------|----------------------------|
| Terminal Position Assurance | Yes                        |
| Strain Relief               | Without                    |
| Mating Alignment Type       | Keyed                      |
| Mating Alignment            | With                       |
| Connector Mounting Type     | Cable Mount (Free-Hanging) |

Housing Features

|                    |                |
|--------------------|----------------|
| Housing Material   | PBT GF         |
| Centerline (Pitch) | 2.54 mm[.1 in] |

Dimensions

|                    |                  |
|--------------------|------------------|
| Connector Height   | 16 mm[.63 in]    |
| Product Width      | 7.9 mm[.311 in]  |
| Product Length     | 16.51 mm[.65 in] |
| Row-to-Row Spacing | 6 mm[.236 in]    |

Usage Conditions

|                             |                            |
|-----------------------------|----------------------------|
| Operating Temperature (Max) | 120 °C[248 °F]             |
| Operating Temperature Range | -40 - 120 °C[-40 - 248 °F] |

Operation/Application

|                     |        |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Packaging Features

|                    |      |
|--------------------|------|
| Packaging Quantity | 3000 |
| Packaging Method   | Bag  |

Other

|                                      |    |
|--------------------------------------|----|
| Serviceable                          | No |
| Connector Position Assurance Capable | No |

Product Compliance



For compliance documentation, visit the product page on TE.com>

|                                               |                                                                                                                               |
|-----------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------|
| EU RoHS Directive 2011/65/EU                  | Compliant                                                                                                                     |
| EU ELV Directive 2000/53/EC                   | Compliant                                                                                                                     |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold                                                                                       |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JAN 2024 (240)<br>Candidate List Declared Against: JAN 2024 (240)<br>Does not contain REACH SVHC |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free                                           |
| Solder Process Capability                     | Not applicable for solder process capability                                                                                  |

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-M8793-T273  
MQS, RECEPTACLE AND TAB

TE Part # 1-968317-3  
MQS ABDECKKAPPE 24P

Also in the Series | MQS






Automotive Connector Caps & Covers (113)



Automotive Connector EMC Shielding (3)

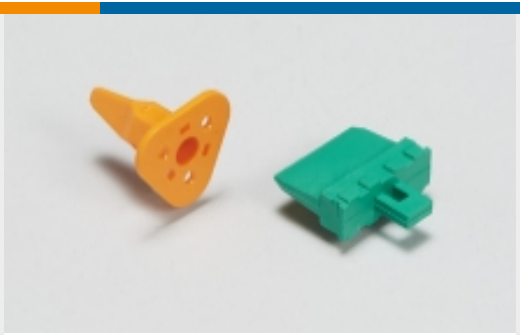

Automotive Connector Locks & Position Assurance(26)



Automotive Housings(379)



Automotive Terminals(88)




Connector Seals & Cavity Plugs(27)



Insertion & Extraction Tools(42)



Other Automotive Connector Accessories(7)

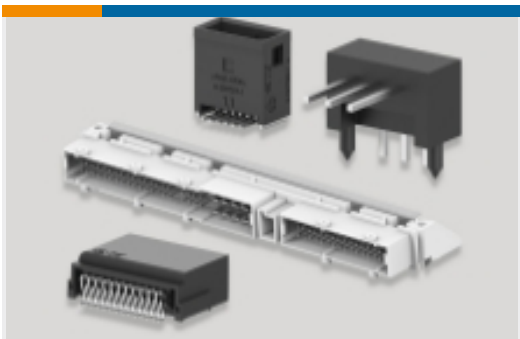


PCB Headers & Receptacles(143)


Customers Also Bought



TE Part # 2-968326-1  
MQS, CONNECTOR HOUSING

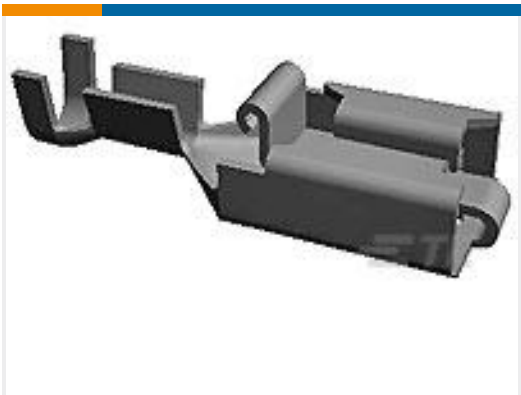


TE Part # 927854-1  
PL 250 REC TERMINAL 17-13 AWG BR

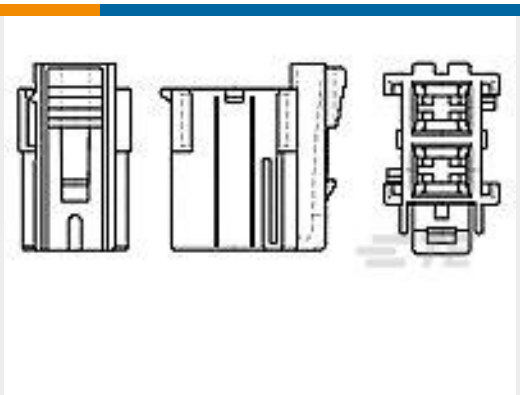

TE Part # 965665-1  
STD-POW-TIM GEH 2P



TE Part # 1355289-2  
AMP MCP Unsealed Connector Housings

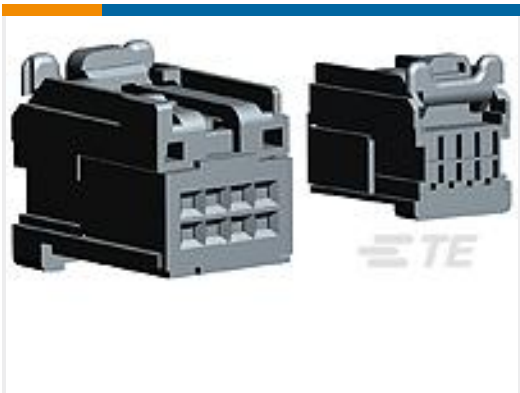

TE Part # 1452015-2  
2X6UNS.FEM ASSY"B"



TE Part # 2-880490-2  
FUSE CONTACT - BUS

Documents



Product Drawings

12POS MQS REC COD B

German

CAD Files

Customer View Model

ENG\_CVM\_CVM\_2-968318-1\_A.2d\_dxf.zip

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_2-968318-1\_A.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_2-968318-1\_A.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

Micro Quadlok Interconnection System (MQS)

English

Product Specifications

STEUERGERATESTECKER 134-POL. MICRO QUADLOCK SYSTEM JUNIOR POWER TIMER

English

Product Specification

English