

2029059-8  ACTIVE


## VAL-U-LOK

TE Internal #: 2029059-8

Standard Rectangular Connectors, Connector Assembly, Plug,  
Mating Alignment, Keyed Mating Alignment Type, Mating  
Retention, Wire-to-Board, Tin, Normal

[View on TE.com >](#)

Connectors &gt; Rectangular Connectors &gt; Standard Rectangular Connectors

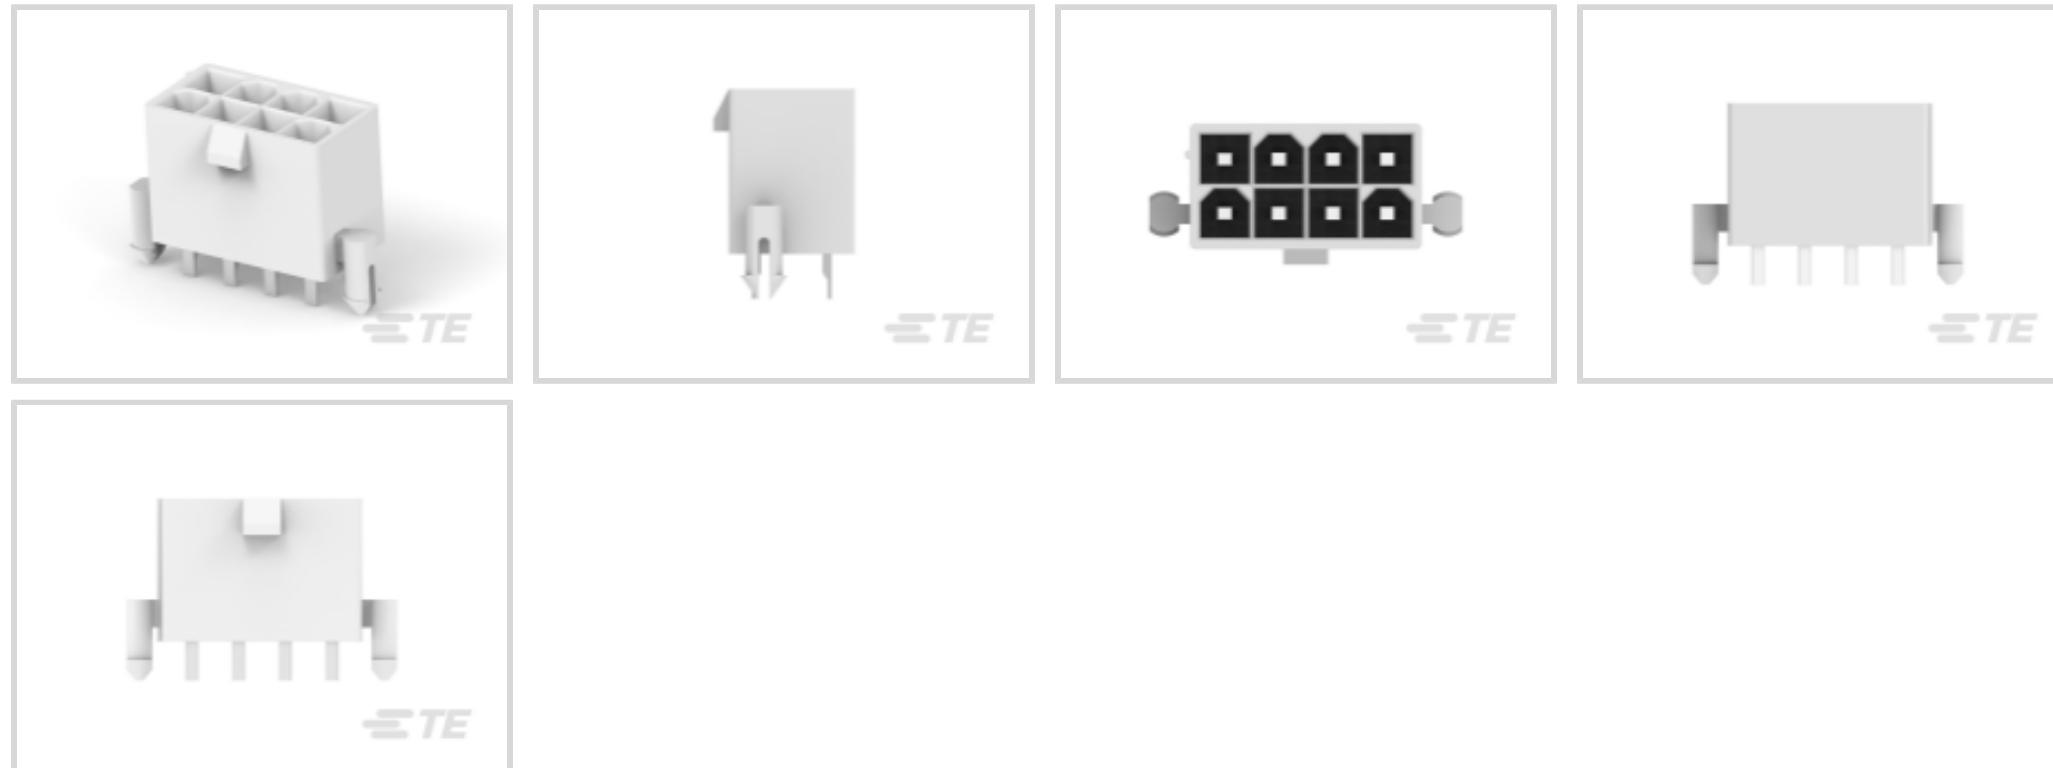Connector Product Type: **Connector Assembly**Connector & Housing Type: **Plug**Mating Alignment: **With**Mating Alignment Type: **Keyed**Mating Retention: **With**

## Features

### Product Type Features

Connector Product Type	Connector Assembly
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Insertion Force Type	Normal
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

### Configuration Features

Contacts Preloaded	Yes
PCB Mount Orientation	Vertical
Number of Positions	8
Number of Rows	2

### Electrical Characteristics

Operating Voltage	600 VAC
-------------------	---------

### Contact Features

Contact Layout	Inline
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
Contact Retention Within Housing	With
Contact Current Rating (Max)	9 A

#### Termination Features

Termination Post & Tail Length	3.5 mm [.138 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

#### Mechanical Attachment

PCB Mount Alignment	With
PCB Mount Retention	With
PCB Mount Retention Type	Boardlock
Mating Alignment	With
Mating Alignment Type	Keyed
Mating Retention	With
Mating Retention Type	Latch
Connector Mounting Type	Board Mount

#### Housing Features

Housing Material	Nylon GF
Housing Color	White
Centerline (Pitch)	4.19 mm [.165 in]

#### Dimensions

Connector Height	12.8 mm [.504 in]
PCB Thickness (Recommended)	1.6 mm [.063 in]
Product Width	9.8 mm [.386 in]
Product Length	18 mm [.709 in]
Row-to-Row Spacing	4.2 mm [.165 in]
Compatible Insulation Diameter Range	1.2 - 3.1 mm [.047 - .122 in]
Wire Size	.12 - 1.4 mm <sup>2</sup>

#### Usage Conditions

Operating Temperature Range	-40 - 105 °C [-40 - 221 °F]
-----------------------------	-----------------------------

### Operation/Application

Shielded	No
Circuit Application	Power

### Identification Marking

Circuit Identification Feature	With
--------------------------------	------

### Industry Standards

CSA Rating	208567
UL Rating	Recognized
Glow Wire Rating	Glow Wire
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2

### Packaging Features

Packaging Quantity	270
Packaging Method	Box & Tray, Tray

### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2019 (197) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts



TE Part # 1586861-8  
8P PM PLUG VAL-U-LOK PM GWT/V0

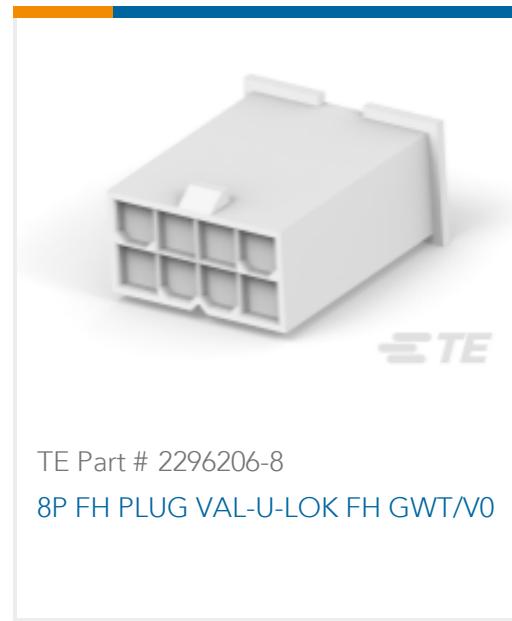

TE Part # 2296206-8  
8P FH PLUG VAL-U-LOK FH GWT/V0

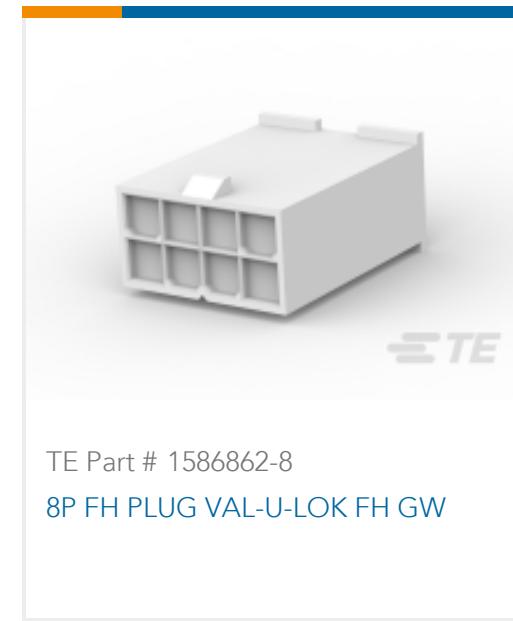

TE Part # 1586862-8  
8P FH PLUG VAL-U-LOK FH GWT/V0



TE Part # 1-2825261-8  
18P VAL-U-LOK HCS VRT HDR W/P V0



TE Part # 2296207-8  
8P PM PLUG VAL-U-LOK PM GWT/V0

## Customers Also Bought



TE Part # DT04-2P  
REC, 2P, GRY, N



TE Part # W2S  
Wedgelocks: DEUTSCH DT




TE Part # 0460-202-16141  
DEUTSCH Solid Contacts



TE Part # 282104-1  
AMP SUPERSEAL 1.5MM,  
CONNECTOR HOUSING



TE Part # DT06-2S  
PLG, 2P, GRY, N

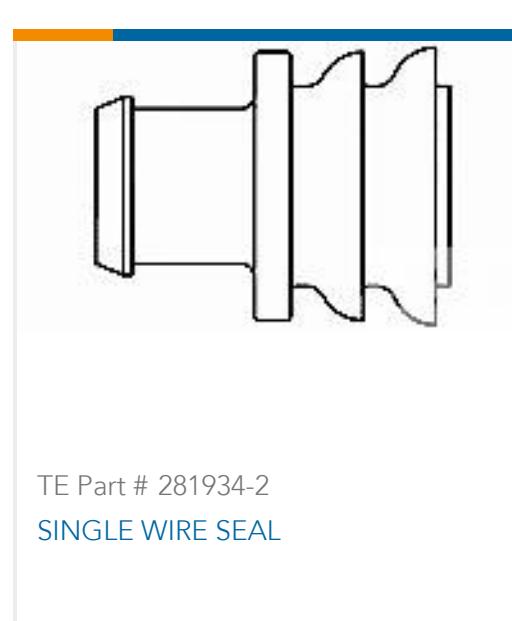

TE Part # 281934-2  
SINGLE WIRE SEAL



TE Part # 114017-ZZ  
SEALING PLUG, SIZE 12/16, WHT

## Documents

### Product Drawings

**8P VAL-U-LOK VRTHDR W/PGS GW**

English

**CAD Files**[3D PDF](#)

3D

**Customer View Model**[ENG\\_CVM\\_CVM\\_2029059-8\\_C.2d\\_dxf.zip](#)

English

**Customer View Model**[ENG\\_CVM\\_CVM\\_2029059-8\\_C.3d\\_igs.zip](#)

English

**Customer View Model**[ENG\\_CVM\\_CVM\\_2029059-8\\_C.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Datasheets & Catalog Pages**[VAL-U-LOK\\_GLOW\\_WIRE\\_CONNECTORS](#)

English

**Product Specifications**[Application Specification](#)

English

**Agency Approvals**[UL Report](#)

English