

1SNK900618R0000

ACTIVE

ENTRELEC | ENTRELEC SNK

TE Internal #: 1SNK900618R0000

Terminal Block & Strip Insulating Accessories, Safety Cover, Used
With Screw Clamp Terminal Blocks, -67 - 230 °F [-55 - 110 °C],
ENTRELEC SNK

[View on TE.com >](#)[Connectors > Terminal Blocks & Strips > Terminal Block & Strip Accessories > Terminal Block & Strip Insulating Accessories](#)Insulating Accessory Type: **Safety Cover**Compatible With Block or Strip Type: **Screw Clamp Terminal Blocks**Operating Temperature Range: **-55 - 110 °C [-67 - 230 °F]**

Features

Product Type Features

Insulating Accessory Type	Safety Cover
---------------------------	--------------

Body Features

Primary Product Material	Polycarbonate
Primary Product Color	Clear
Product Weight	1.5 g [.053 oz]

Dimensions

Product Spacing	5.2 mm [.205 in]
Product Depth	25.05 mm [.986 in]
Product Height	49.24 mm [1.939 in]

Usage Conditions

Installation Temperature Range	-5 - 40 °C [23 - 104 °F]
Operating Temperature Range	-55 - 110 °C [-67 - 230 °F]

Operation/Application

Compatible With Block or Strip Type	Screw Clamp Terminal Blocks
-------------------------------------	-----------------------------

Industry Standards

IP Rating	IP20
UL Flammability Rating	UL 94V-2

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: UV-329 (.5% in Component Part) <small>Article Safe Usage Statements: Wash thoroughly after handling. Do not handle until all safety precautions have been read and understood. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.</small>
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts





Also in the Series

ENTRELEC SNK

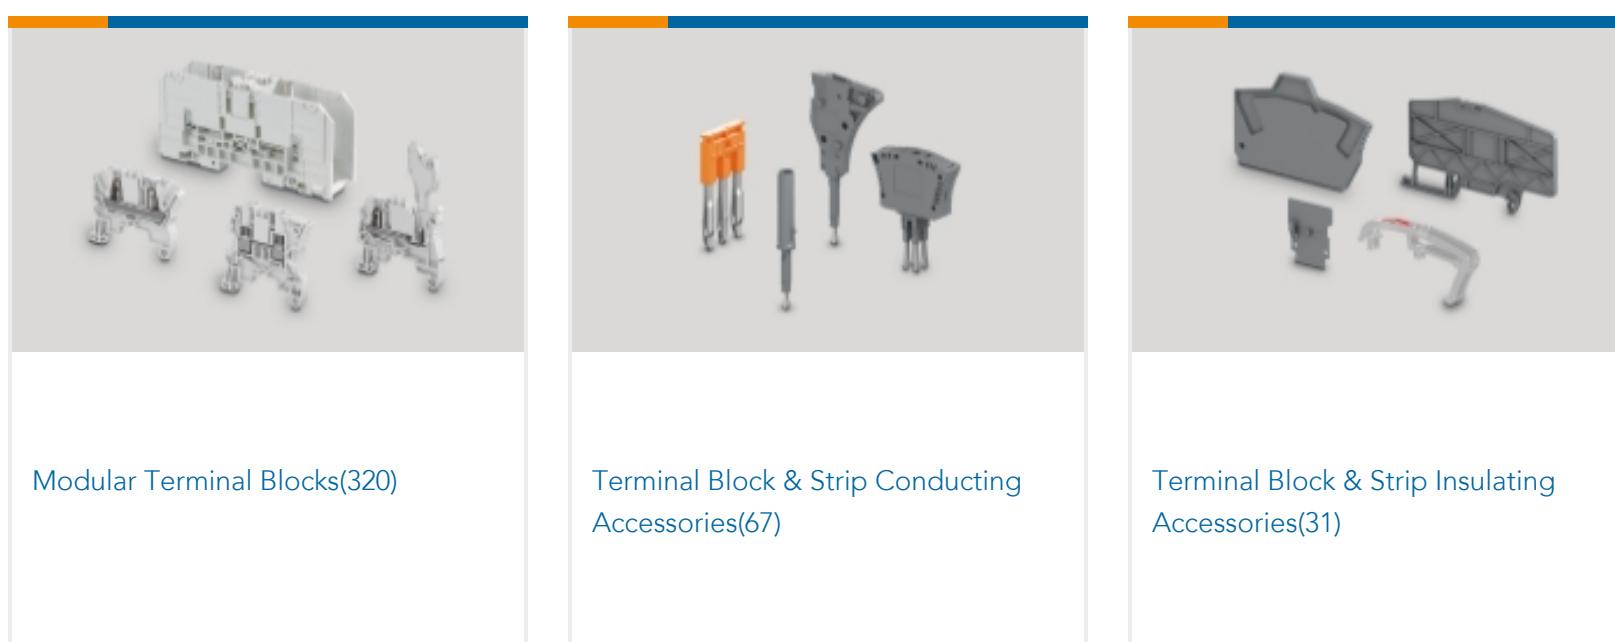

Customers Also Bought



Documents

CAD Files

[3D PDF](#)

3D

Customer View Model

[ENG_CVM_CVM_1SNK900618R0000_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNK900618R0000_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1SNK900618R0000_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[ENTRELEC Terminal Block - Master Catalog](#)

[ENTRELEC Terminal Block - Master Catalog](#)

English

1SNK900618R0000

Terminal Block & Strip Insulating Accessories, Safety Cover, Used With Screw Clamp
Terminal Blocks, -67 - 230 °F [-55 - 110 °C], ENTRELEC SNK



PL5

English

SNK SERIES TERMINAL BLOCKS

English

[ENTRELEC Terminal Blocks Catalogue \(RUS\)](#)