

5-1437719-4 ✓ ACTIVE

#### Triad 01 Panel/PCB Connector


TE Internal #: 5-1437719-4

Standard Circular Connectors, Wire-to-Board, 3 Position, Sealable, Printed Circuit Board, Signal, Panel Mount, Triad 01 Panel/PCB Connector

[View on TE.com >](#)



Connectors > Circular Connectors > Standard Circular Connectors

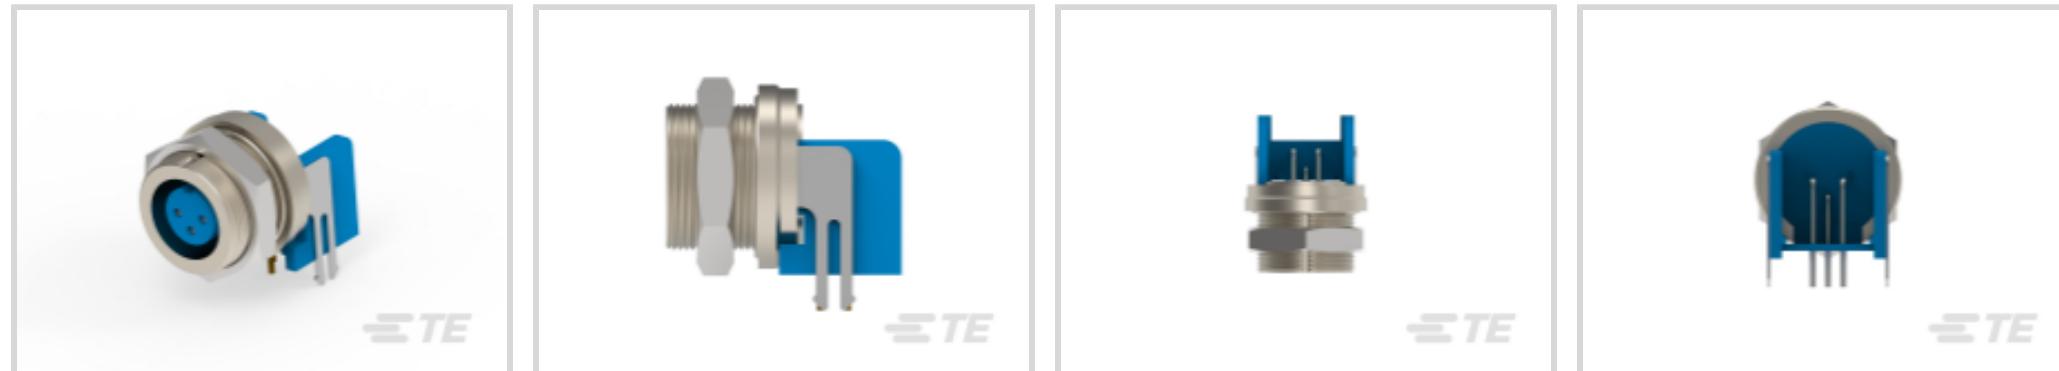

Connector System: **Wire-to-Board**

Connector Mounting Type: **Panel Mount**

Number of Positions: **3**

Sealable: **Yes**

Connector & Contact Terminates To: **Printed Circuit Board**

### Features

#### Product Type Features

Product Type	Connector Assembly
Connector System	Wire-to-Board
Sealable	Yes
Connector & Contact Terminates To	Printed Circuit Board
Circular Connector Type	Receptacle
Shell Type	Metal

#### Configuration Features

Number of Positions	3
Number of Power Positions	0
Number of Signal Positions	3
Contacts Preloaded	Yes

#### Electrical Characteristics

Operating Voltage	60 VAC
-------------------	--------

#### Body Features

Environmental Protection Type	Sealed
Environmental Protection	IP65
Shell Plating Material	Nickel

Shell Base Material	CuZn
---------------------	------

Circular Connector Insulation Material Type	PBT
---	-----

Hermetically Sealed	No
---------------------	----

#### Contact Features

Contact Current Rating (Max)	3 A
------------------------------	-----

Reverse Gender	Yes
----------------	-----

Contact Layout Arrangement	Circular
----------------------------	----------

Circular Connector Contact Type	Socket
---------------------------------	--------

#### Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
---	-----------------------

#### Mechanical Attachment

Mating Alignment	With
------------------	------

Connector Mounting Type	Panel Mount
-------------------------	-------------

Mating Retention	With
------------------	------

#### Dimensions

Assembly Length	19.2 mm
-----------------	---------

Wire Size	.25 mm <sup>2</sup>
-----------	---------------------

#### Usage Conditions

Operating Temperature Range	-40 - 80 °C[-40 - 176 °F]
-----------------------------	---------------------------

#### Operation/Application

Durability Rating	500 Cycles
-------------------	------------

Circuit Application	Signal
---------------------	--------

Shielded	No
----------	----

#### Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

#### Packaging Features

Packaging Quantity	25
--------------------	----

#### Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
------------------------------	---------------------------

EU ELV Directive 2000/53/EC	Not Compliant
-----------------------------	---------------

China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (3% in Component Part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Hand solderable with lead free solder

## Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1-1437719-5  
T01-0550-P03-MALE PLUG  
CONNECTOR SOLDER


Also in the Series | [Triad 01 Panel/PCB Connector](#)

Standard Circular Connectors(26)

## Customers Also Bought



TE Part # 5177986-2  
0.8FH,P05H.5,060,08/Sn,TR,SC

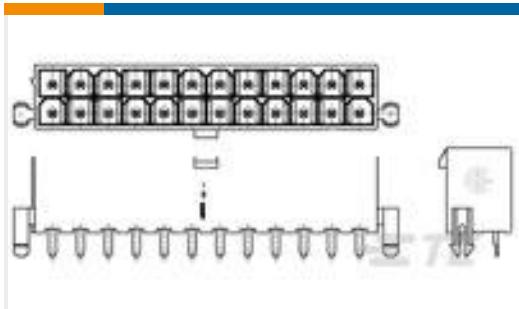

TE Part # 2-1586039-4  
24P VAL-U-LOK VRT HDR W/P V2




TE Part # 4-1437719-8  
T01-0560-P04-MALE REC PANEL-PCB MOUNT RA



TE Part # 2337230-1  
TACT ULTRA TB 3.0X2.0X0.6 160GF



TE Part # 5352069-1  
Z-PACK/B25 RAF 125P

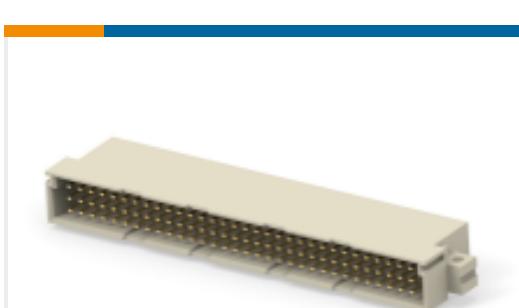

TE Part # 254835-E  
STVC 96 M ABC VVV 4-00 EE \*\* 247 E007 1

## Documents

### Product Drawings

[T01-0560-S03-FEMALE REC PANEL-PCB MNT RA](#)

English

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_5-1437719-4\\_A.2d\\_dxf.zip](#)

English

### 3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_5-1437719-4\\_A.3d\\_igs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_5-1437719-4\\_A.3d\\_stp.zip](#)

English

### Datasheets & Catalog Pages

[M8 / M12 Connector System Catalog](#)

English

### Product Specifications

[Product Specification](#)

English

