


Relays & Contactors > Relays > Mil-Aero Relays > 1/5-Size Relays > DPDT Relay:Electrically-Held, 1/5-Size Relay

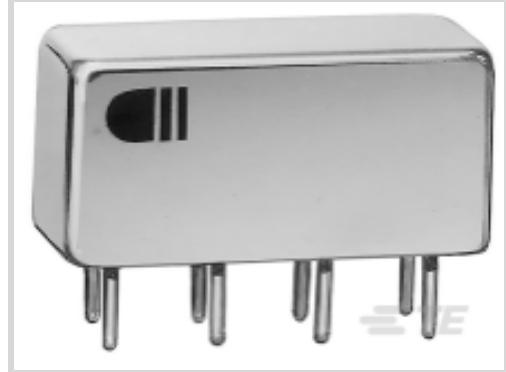

Contact Arrangement: **2 Form C, DPDT, 2 C/O**

Input Voltage: **26.5 VDC**

Contact Current Rating: **2 A**

Coil Voltage Rating: **26.5 VDC**

Coil Resistance: **1350 Ω**

[All DPDT Relay:Electrically-Held, 1/5-Size Relay \(84\)](#)

## Features

### Configuration Features

Contact Arrangement	2 Form C, DPDT, 2 C/O
---------------------	-----------------------

### Electrical Characteristics

Input Voltage	26.5 VDC
Contact Current Rating	2 A
Coil Voltage Rating	26.5 VDC
Coil Resistance	1350 Ω
Coil Power Rating DC	520 mW

### Body Features

Enclosure Type	Hermetically Sealed
----------------	---------------------

### Termination Features

Relay Connection Type	Terminals
Terminal Configuration	Solder Hook Terminals

### Mechanical Attachment

Product Mount Type	Panel
--------------------	-------

### Usage Conditions

Operating Temperature Range	-65 - 125 °C
-----------------------------	--------------

## Operation/Application

Vibration Resistance	30G's, 10 - 3000Hz
Actuating System	DC
Shock Resistance	75G's, 6ms
Coil Magnetic System	Non-Polarized, Monostable

## Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Not Compliant
EU ELV Directive 2000/53/EC	Not Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not lead free process capable

### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulations, TE's information on SVHC in articles for this part number is still based on the European Chemical Agency (ECHA) 'Guidance on requirements for substances in articles'(Version: 2, April 2011), applying the 0.1% weight on weight concentration threshold at the finished product level. TE is aware of the European Court of Justice ruling of September 10th, 2015 also known as O5A (Once An Article Always An Article) stating that, in case of 'complex object', the threshold for a SVHC must be applied to both the product as a whole and simultaneously to each of the articles forming part of its composition. TE has evaluated this ruling based on the new ECHA "Guidance on requirements for substances in articles" (June 2017, version 4.0) and will be updating its statements accordingly.

## Compatible Parts

TE Part # 1-1617076-0  
3SBH1138A2 = M39016/14-001MAlso in the Series | **CII 3SBC Relay**

1/5-Size Relays(42)

## Customers Also Bought

TE Part # DT04-2P  
REC, 2P, GRY, NTE Part # W2S  
Wedgelocks: DEUTSCH DTTE Part # 0460-202-16141  
DEUTSCH Solid ContactsTE Part # 282104-1  
AMP SUPERSEAL 1.5MM,  
CONNECTOR HOUSINGTE Part # DT06-2S  
PLG, 2P, GRY, NTE Part # 281934-2  
SINGLE WIRE SEALTE Part # 114017-ZZ  
SEALING PLUG, SIZE 12/16, WHT

## Documents

## Product Drawings

3SBC1521A2 = M39016/13-060M

English

## Datasheets &amp; Catalog Pages

5-1773450-5\_sec1\_3SBC

English

## RELAY

English