

1934349-1  ACTIVE

Z-PACK | Z-PACK TinMan

TE Internal #: 1934349-1

High Speed Backplane Connectors, 120 Position, Mating  
Alignment, Guide Slot Mating Alignment Type, 15 Row, 8 Column,  
PCB Mount Header, Z-PACK TinMan

[View on TE.com >](#)



Connectors > PCB Connectors > Backplane Connectors > High Speed Backplane Connectors



Number of Positions: **120**

Row-to-Row Spacing: **1.4 mm [ .055 in ]**

Mating Alignment: **With**

Mating Alignment Type: **Guide Slot**

Number of Rows: **15**

## Features

### Product Type Features

Backplane Module Type	Center
Signal Arrangement	Differential
Connector System	Board-to-Board
Connector & Contact Terminates To	Printed Circuit Board
PCB Connector Assembly Type	PCB Mount Header
Shroud Style	Partially Shrouded

### Configuration Features

Pairs per Column	5
Number of Pairs	40
Stackable	No
Number of Signal Positions	80
Backplane Architecture	Co-Planar
Number of Positions	120
Number of Rows	15
Number of Columns	8
PCB Mount Orientation	Right Angle

### Electrical Characteristics

Impedance	100 Ω
-----------	-------

Operating Voltage	250 VAC
-------------------	---------

#### Signal Characteristics

Differential Impedance	100 Ω
Number of Differential Pairs per Column	5
Data Rate	10 Gb/s

#### Body Features

Shield Material	Phosphor Bronze
Primary Product Color	Black

#### Contact Features

Contact Mating Area Length	6 mm[.236 in]
PCB Contact Termination Area Plating Material Thickness	.5 μm[20 μin]
Contact Type	Pin
Contact Mating Area Plating Material	Gold
PCB Contact Termination Area Plating Material Finish	Matte
Contact Shape & Form	Rectangular
PCB Contact Termination Area Plating Material	Tin
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	.5 A

#### Termination Features

Termination Post & Tail Length	2.2 mm[.087 in]
Termination Method to Printed Circuit Board	Through Hole - Press-Fit

#### Mechanical Attachment

Guide Hardware	Without
Mating Retention	Without
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Action/Compliant Tail
Mating Alignment	With
Mating Alignment Type	Guide Slot
Connector Mounting Type	Board Mount

#### Housing Features

Number of Shrouded Sides	2
--------------------------	---

End Wall Location

Open

Housing Material

LCP (Liquid Crystal Polymer)

Centerline (Pitch)

1.9 mm [.075 in]

**Dimensions**

Connector Length

15.35 mm

Connector Height

24.4 mm

Connector Width

36.61 mm

PCB Thickness (Recommended)

1.57 mm [.062 in]

PCB Hole Diameter

.47 mm

Row-to-Row Spacing

1.4 mm [.055 in]

**Usage Conditions**

Operating Temperature Range

-65 - 90 °C [-85 - 194 °F]

**Operation/Application**

Circuit Application

Signal

**Industry Standards**

Compatible With Agency/Standards Products

UL

Compatible With Approved Standards Products

UL E28476

UL Flammability Rating

UL 94V-0

**Packaging Features**

Packaging Method

Box &amp; Tube, Tube

**Product Compliance**For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024  
(240)Candidate List Declared Against: JAN 2024  
(240)

Does not contain REACH SVHC

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per  
homogenous material. Also BFR/CFR/PVC  
Free

## Solder Process Capability

Not applicable for solder process capability

## Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts



TE Part # 1934218-1  
Tin Man Recept Assy 5 pair 8 Column

## Also in the Series | Z-PACK TinMan

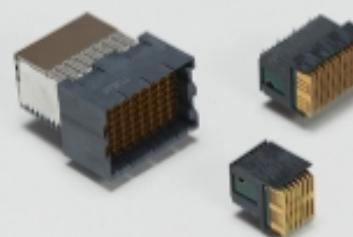

High Speed Backplane Connectors(65)

## Customers Also Bought



TE Part # DT04-2P  
REC, 2P, GRY, N



TE Part # DT06-2S  
PLG, 2P, GRY, N



TE Part # W2S  
Wedgelocks: DEUTSCH DT



TE Part # 0460-202-16141  
DEUTSCH Solid Contacts



## Documents

### Product Drawings

[TinMan R/A Header Assy 5x8 Open](#)

English

---

### CAD Files

Customer View Model

[ENG\\_CVM\\_CVM\\_1934349-1\\_B.2d\\_dxf.zip](#)

English

### 3D PDF

3D

Customer View Model

[ENG\\_CVM\\_CVM\\_1934349-1\\_B.3d\\_jgs.zip](#)

English

Customer View Model

[ENG\\_CVM\\_CVM\\_1934349-1\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

### Datasheets & Catalog Pages

[High Speed Backplane Connectors catalog - Z-PACK TinMan High Speed, High Density Backplane Connector](#)

English

---

### Product Specifications

[Application Specification](#)

English