




Connectors > Connector Accessories > Connector Hardware

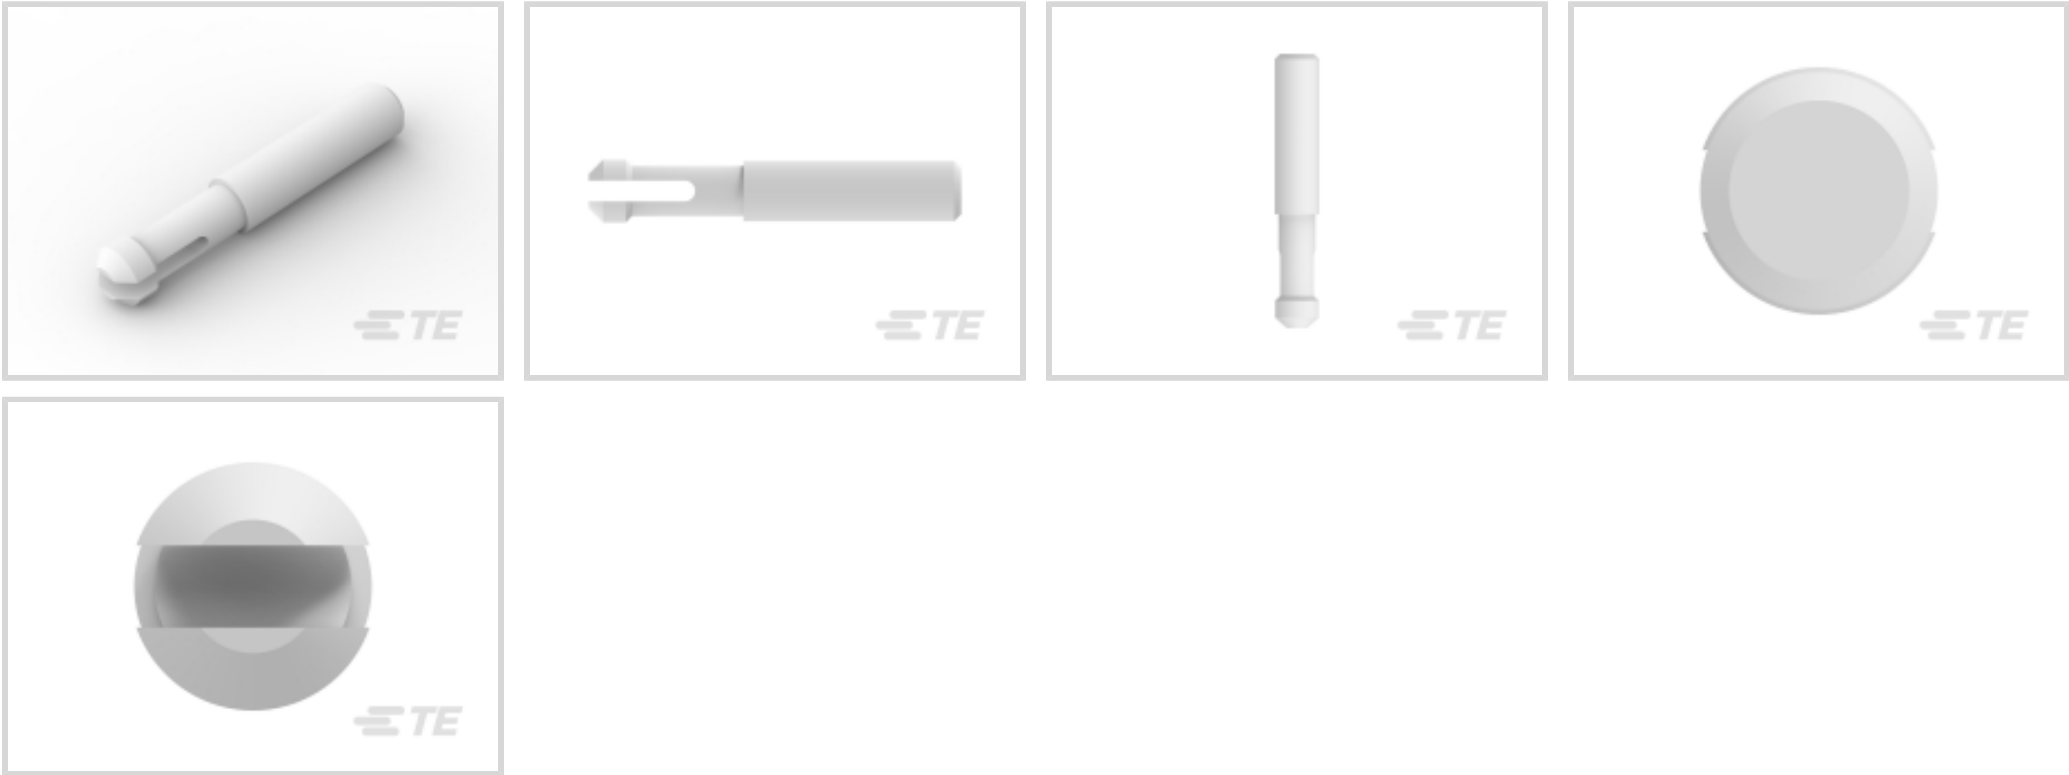

Hardware Accessory Function: **Coding & Keying**

Connector Hardware Accessory Type: **Keying Plug**

Primary Product Color: **Natural**

Operating Temperature (Max): **105 °C [221 °F]**

Operating Temperature Range: **-55 - 105 °C [-67 - 221 °F]**

Features

Product Type Features

Hardware Accessory Function	Coding & Keying
Connector Hardware Accessory Type	Keying Plug

Body Features

Primary Product Color	Natural
-----------------------	---------

Usage Conditions

Operating Temperature (Max)	105 °C[221 °F]
Operating Temperature Range	-55 - 105 °C[-67 - 221 °F]

Industry Standards

UL Flammability Rating	UL 94V-2
------------------------	----------

Packaging Features

Packaging Quantity	10000
Packaging Method	Bag

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # 640715-1
06P UMNL STR/REL

TE Part # 641777-1
UMNL STR/REL ADAPTER NATL

TE Part # 794271-1
03P UMNL INTERFACE SEAL

TE Part # 794269-1
02P UMNL INTERFACE SEAL

TE Part # 1586099-1
06P UMNL WIRE SEAL GRAY 12AWG

TE Part # 2029268-1
06P UMNL WIRE SEAL IN-LINE

TE Part # 1-640415-0
UMNL KEYING PLUG V0

TE Part # 794270-1
02P UMNL WIRE SEAL





TE Part # 2029383-1
06P UMNL-II FRONT2RR FOAM SPCR




TE Part # 2029442-1
06P UMNL-II TPA FOAM SPACER

Also in the Series

Universal MATE-N-LOK



Circular Power Connectors(2)

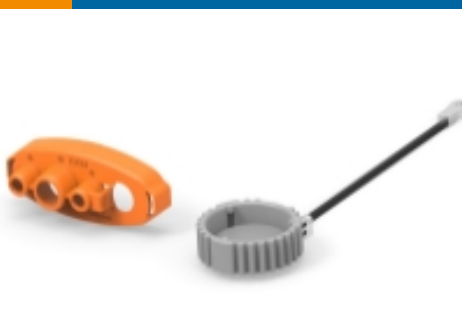

Connector Caps & Covers(34)



Connector Contacts(209)



Connector Hardware(12)



Connector Seals & Cavity Plugs(27)



Connector Strain Relief(7)



Insertion & Extraction Tools(4)



Rectangular Connector Housings(1)



Rectangular Power Connectors(671)



Standard Circular Connectors(1)


Customers Also Bought



TE Part # 2205071-1
CA MICRO-MATCH MOW-PB 10POS



TE Part # 1-350590-0
STR/REL CLAMP NATL

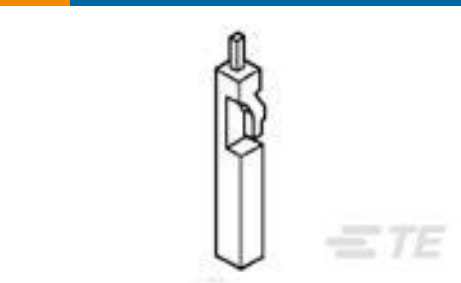

TE Part # 926519-2
KEYING PLUG



TE Part # 1-480710-9
15P UMNL PLUG HSG BLK





TE Part # 1-480701-0
03P UMNL CAP HSG NATL



TE Part # 770530-1
.093 COMM P&S PIN 14-20 PTPBR




TE Part # 5-925370-0
MOD IV REC HSG, 2X50P



TE Part # 1SNA115206R2200
MTC6



TE Part # CSB-RGFB-102-UFFR
RP-SMA to U.FL/MHF1 102 mm RG178

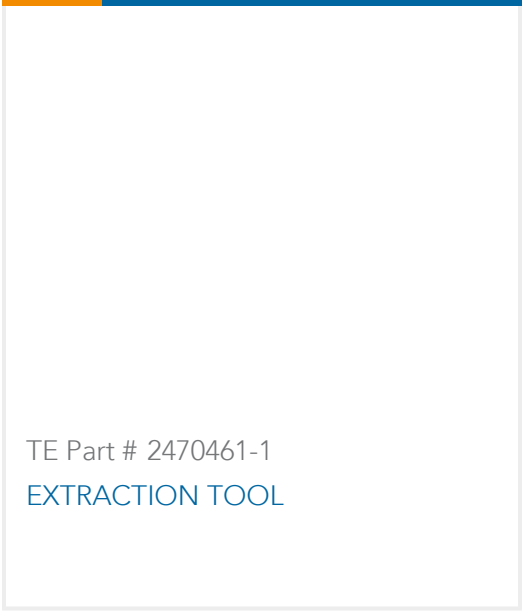

TE Part # 2470461-1
EXTRACTION TOOL

Documents

Product Drawings

UMNL KEYING PLUG V2 NATL

English

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1-640415-1_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_1-640415-1_C.3d_igs.zip

English

Customer View Model

ENG_CVM_1-640415-1_C.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-640415-1_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-640415-1_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-640415-1_M.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY
English

Product Specifications
Application Specification
English

Instruction Sheets
Instruction Sheet (U.S.)
English