

726346-1

✓ ACTIVE

SOLISTRAND

TE Internal #: 726346-1

Closed Ring Tongue Terminal, 2 AWG, M8 Stud Size, 8.4 mm [.331 in] Stud Diameter, Closed Barrel, Straight, Tin, Uninsulated

[View on TE.com >](#)

Terminals & Splices > Ring Terminals

Ring Terminal Product Type: **Closed Ring Tongue Terminal**Wire Size: **52600 - 83700 CMA**Stud Size: **M8**

Features

Product Type Features

Ring Terminal Product Type	Closed Ring Tongue Terminal
Stud Size	M8
Sealable	No
Wire Insulation Support Retention Type	Non-Insulation Support

Configuration Features

Number of Holes	1
-----------------	---

Body Features

Product Weight	9.94 g
----------------	--------

Contact Features

Barrel Type	Closed
Terminal Orientation	Straight
Terminal Plating Material	Tin

Mechanical Attachment

Wire Insulation Support	Without
-------------------------	---------

Dimensions

Wire Size	52600 - 83700 CMA
Stud Diameter	8.4 mm [.331 in]
Tongue Thickness	.79 mm [.031 in]
Product Length	26 mm [1.023 in]

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	170 °C[338 °F]

Operation/Application

Compatible With Wire Base Material	Copper
Compatible With Wire Plating Material	Tin

Industry Standards

Government Qualified Terminal	No
-------------------------------	----

Packaging Features

Packaging Quantity	200
Packaging Method	Box

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2021 (211) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 59975-1
HYP10 SOLIS 8-2AWG ASSY



TE Part # 726346
SO RINGTONG 6-35

Customers Also Bought



TE Part # 206305-1
CPC PLUG ASSEMBLY SIZE 23-37



TE Part # 1658685-1
HDP-22,RCPT,SIZE 5,78 POSN



TE Part # 130005
PIDG R 22-16 10 (5MM)



TE Part # 38946-16L
CONT SOC ASSY



TE Part # 1-480305-0
03P CMNL CAP HSG F/H NATL




TE Part # 1622500-1
LR1 1% 4K7




TE Part # YDTS20F15-19SNV001
RECP ASSY



TE Part # YWM11BW03-03PA0000
RECEPT ASSY.WM. IN-LINE.SIZE 3 3 WAY

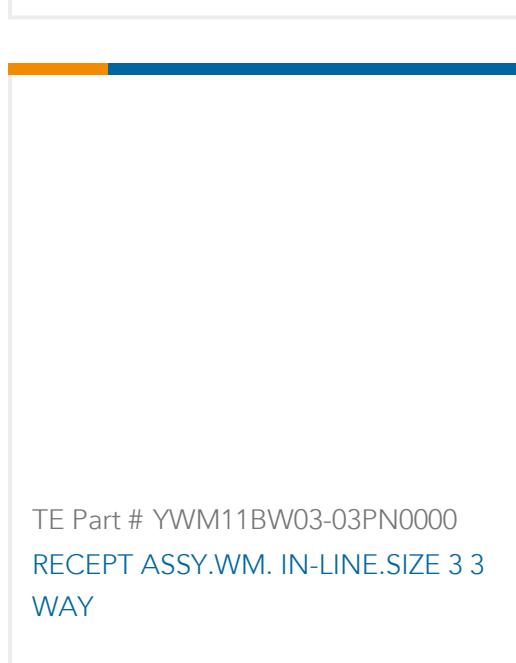

TE Part # YWM11BW03-03PN0000
RECEPT ASSY.WM. IN-LINE.SIZE 3 3 WAY

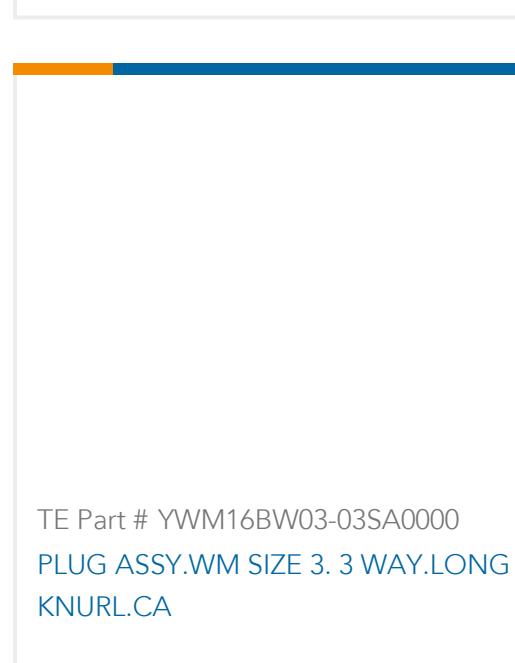

TE Part # YWM16BW03-03SA0000
PLUG ASSY.WM SIZE 3. 3 WAY.LONG
KNURL.CA

Documents

Product Drawings

SO-RINGZUNGE D46234

English

Datasheets & Catalog Pages

RADIATION_RESISTANT_PRE-INSULATED_TERMINALS_SPLICES

English

726346-1

Closed Ring Tongue Terminal, 2 AWG, M8 Stud Size, 8.4 mm [.331 in] Stud Diameter,
Closed Barrel, Straight, Tin, Uninsulated

