

2-111446-0  ACTIVE

AMP-LATCH

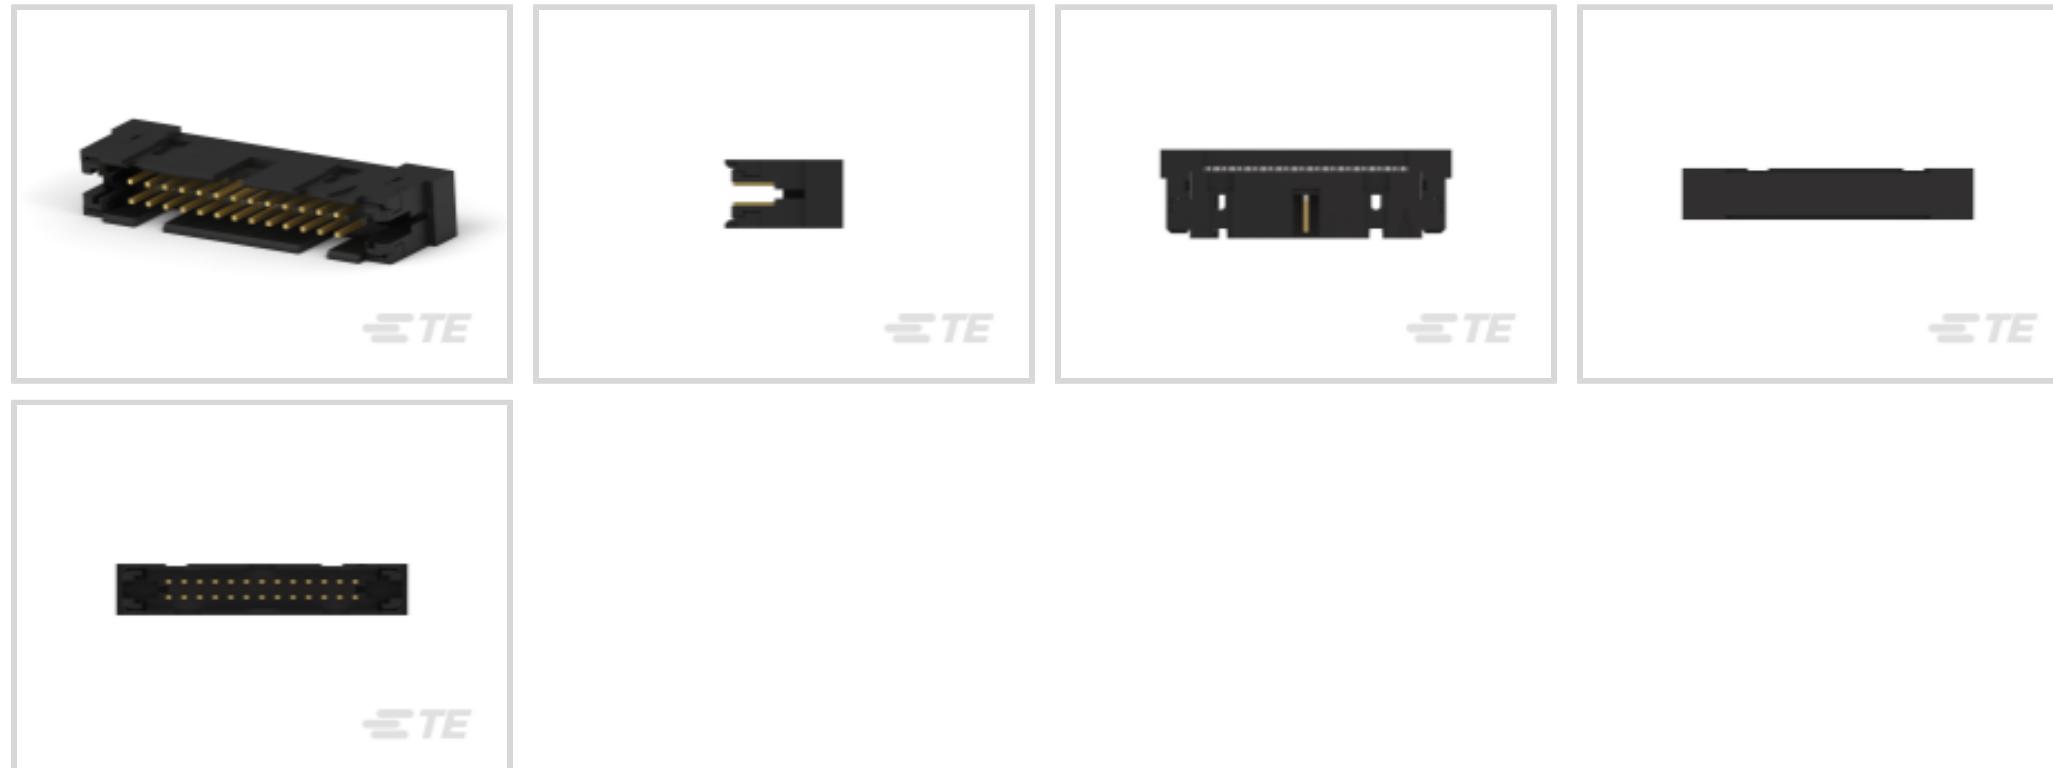
TE Internal #: 2-111446-0

Ribbon Cable Connectors, Wire-to-Wire, 26 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, Plug, Low Profile

[View on TE.com >](#)



Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors



Connector System: **Wire-to-Wire**

Number of Positions: **26**

Centerline (Pitch): **2.54 mm [.1 in]**

PCB Mount Retention: **Without**

PCB Mount Retention Type: **Screw Mount**

Features

Product Type Features

Ribbon Cable Connector Header Type	Shrouded
Connector Product Type	Connector Assembly
Connector System	Wire-to-Wire
Connector & Housing Type	Plug
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	26
PCB Mount Orientation	Vertical
Number of Rows	2

Electrical Characteristics

Insulation Resistance	5000 MΩ
Operating Voltage	250 VAC

Body Features

Daisy Chain	Without
-------------	---------

Primary Product Color	Black
Connector Profile	Low
Contact Features	
Contact Mating Area Length	6.1 mm [.24 in]
Mating Square Post Dimension	.64 mm [.025 in]
Contact Type	Pin
Wire Contact Termination Area Plating Thickness	2.54 μ m [100 μ in]
Wire Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	.76 μ m [29.92 μ in] [30 μ m]
Contact Base Material	Phosphor Bronze
Contact Current Rating (Max)	1 A
Termination Features	
Termination Method to Wire & Cable	Insulation Displacement (IDC)
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment	With
PCB Mount Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
PCB Mount Retention Type	Screw Mount
Mating Alignment Type	Keyed
Mating Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Thermoplastic
Centerline (Pitch)	2.54 mm [.1 in]
Dimensions	
Shrouded End Dimension	3.81 mm [.15 in]
Connector Length	47.5 mm [1.87 in]
Connector Height	14.48 mm [.57 in]
Connector Width	8.38 mm [.33 in]
Wire Size	.08 - .15 mm ²

Compatible Insulation Diameter Range	.81 - .97 mm [.032 - .038 in]
--------------------------------------	-------------------------------

Row-to-Row Spacing	2 mm [.1 in]
--------------------	--------------

Usage Conditions

Operating Temperature Range	-65 - 105 °C [-85 - 221 °F]
-----------------------------	-----------------------------

Operation/Application

Solder Process Feature	Solder Dipped
------------------------	---------------

Circuit Application	Signal
---------------------	--------

Industry Standards

UL Rating	Recognized
-----------	------------

Compatible With Agency/Standards Products	CSA, UL
---	---------

Compatible With Approved Standards Products	CSA LR7189, UL E28476
---	-----------------------

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	60
--------------------	----

Packaging Method	Box & Tray, Tray
------------------	------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240)
--	--

	Candidate List Declared Against: JAN 2024 (240)
--	--

	Does not contain REACH SVHC
--	-----------------------------

Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
-----------------	--

Solder Process Capability	Not applicable for solder process capability
---------------------------	--

Product Compliance Disclaimer

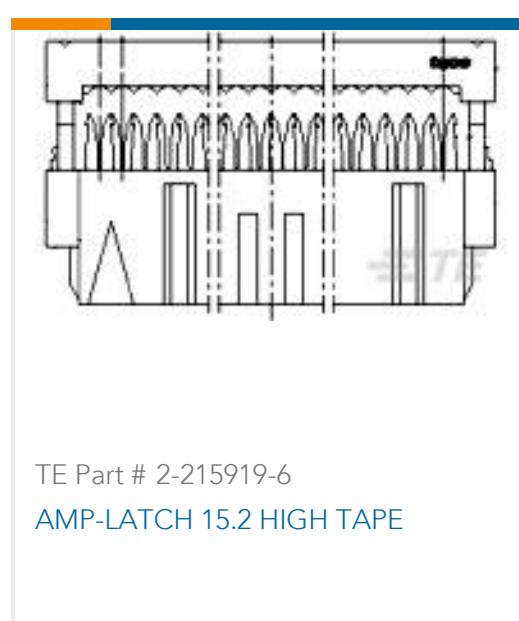
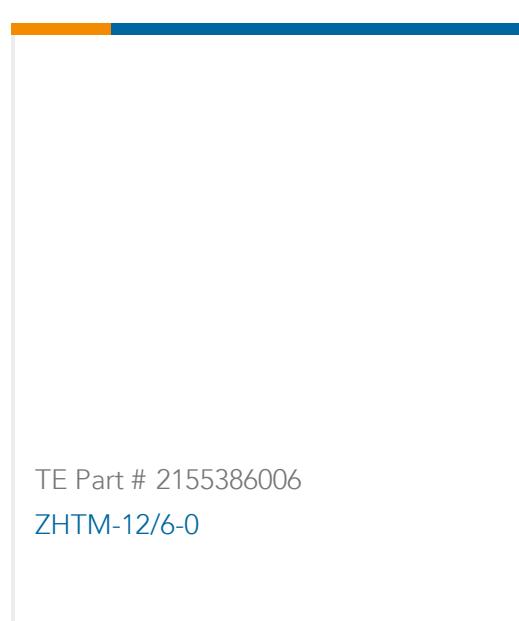
This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous

materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Customers Also Bought

TE Part # 5103308-7
A/L LOW PRO HDR 34P VERT BLACKTE Part # 7-1625867-1
RP 1J 0.166W 34R 0.1% 25PPM 1K RLTE Part # 1461400-5
OJE-SH-124DM,000TE Part # 321013
TERMINAL,PIDG R 26-22 0TE Part # 2-215919-6
AMP-LATCH 15.2 HIGH TAPETE Part # 1-1649326-5
RT114024TE Part # 826884-3
HOUSING.TE Part # 1483350-2
MICRO-MATCH LEAD 04P 150MMTE Part # 2155386006
ZHTM-12/6-0

Documents

Product Drawings

026 UNIV I/O 30DP NO EARS

English

CAD Files

Customer View Model

[ENG_CVM_CVM_2-111446-0_M.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2-111446-0_M.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-111446-0_M.3d_stp.zip](#)

English

Datasheets & Catalog Pages

Ribbon Cable Interconnect Solutions

English

Product Specifications

[Application Specification](#)

English

Agency Approvals

[Agency Approval Document](#)

English