



TE Internal #: 413985-1  
SMB RF Interface, Plug, 50  $\Omega$ , RG 316 / RG 188 / RG 174, Snap-Fit, 4  
GHz Operating Frequency, Cable-to-Cable, 1 Position, Wire &  
Cable  
[View on TE.com >](#)

Connectors > RF Connectors > Coax Connectors > SMB Connector: Plug, Mated Outer Dia. 4.75mm, 50 Ohm



RF Interface: **SMB**  
RF Connector Style: **Plug**  
RF Connector Mated Outer Diameter (Approximate): **4.75 mm [ .187 in ]**  
Impedance: **50  $\Omega$**   
Compatible With RF Cable Type: **RG 174, RG 188, RG 316**

[All SMB Connector: Plug, Mated Outer Dia. 4.75mm, 50 Ohm \(18\)](#)

Features

Product Type Features

Connector Shape	Circular
Connector Product Type	Connector Assembly
RF Interface	SMB
RF Connector Style	Plug
Compatible With RF Cable Type	RG 174, RG 188, RG 316
Connector System	Cable-to-Cable
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	1
Number of Coaxial Contacts	1

Electrical Characteristics

Impedance	50 $\Omega$
-----------	-------------



Body Features

Body Underplating Material	Nickel
Cable Connector Orientation	Straight
Body Material	Brass
Body Plating Material	Gold

Contact Features

RF Connector Center Contact Underplating Material	Nickel
RF Connector Center Contact Plating Material	Gold
RF Connector Center Contact Material	Beryllium Copper

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

RF Connector Coupling Mechanism	Snap-Fit
Connector Mounting Type	Cable Mount (Free-Hanging)
RF Contact Captivation Method	Mechanical
Detent	Without

Dimensions

RF Connector Mated Outer Diameter (Approximate)	4.75 mm[.187 in]
---	------------------

Usage Conditions

Operating Temperature Range	-65 - 165 °C[-85 - 329 °F]
-----------------------------	----------------------------

Operation/Application

Operating Frequency	4 GHz
---------------------	-------

Packaging Features


Packaging Method	Carton
------------------	--------

Other

Outer Contact Plating Material	Gold over Nickel
Grade	Mil-Type
Dielectric Material	PTFE

Product Compliance

For compliance documentation, visit the product page on [TE.com](#)>






EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Pb (3.7% in Component Part) <b>Article Safe Usage Statements:</b> Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts




TE Part # CAT-884-SMBF50  
SMB Connector: Plug, Mated Outer Dia. 4.75mm, 50 Ohm



TE Part # CAT-884-SMBMRA50  
SMB Connector: Jack, Right-Angle Mount, Mated Outer Dia. 4.75mm

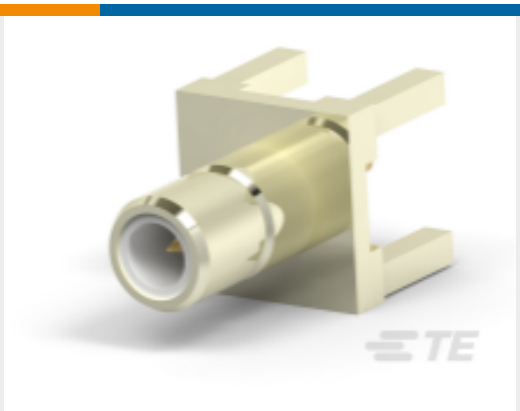


TE Part # CAT-884-SMBV50  
SMB Connector: Jack, Vertical Mount, Mated Outer Dia. 4.75mm, 50 Ohm




TE Part # CAT-884-SMBM50  
SMB Connector: Male (Jack), Mated Outer Dia. 4.75mm, 50 Ohm







TE Part # CAT-884-SMBMSF50  
SMB RF Connector: Jack, Snap Fit, 50 Ohm



TE Part # 228553-1  
SMB COMML BLKHD ADAPTER

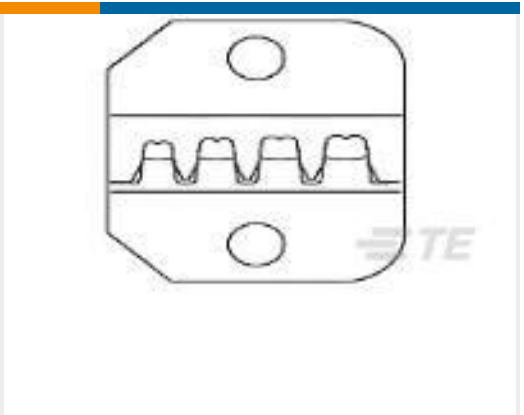


TE Part # 58483-1  
TRIPLE HEX DIE ASSY SMB




TE Part # 58499-1  
AMP PRO-CRIMPER ASSEMBLY


Customers Also Bought

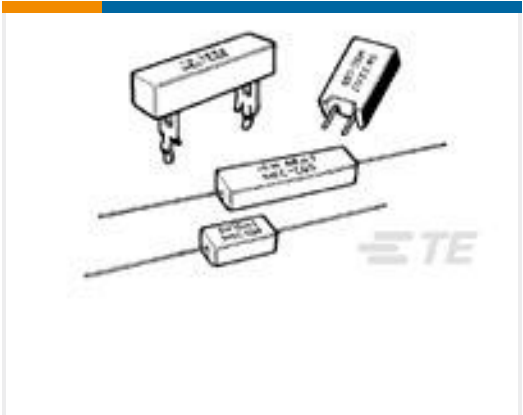


TE Part # 2-1623795-8  
SQP5 10R 5% WIRE




TE Part # 52266  
TERMINAL R PG 4 5/16




TE Part # T4061310003-001  
M8 CABLE ST FEMALE 0.5M 3POS PVC CABLE




TE Part # 1558660-7  
T9GV5L14-24




TE Part # DTM2S-BT  
BOOT, 2P, PLG, ST, GRY



TE Part # 1546311-6  
6P .563" DR BARRIER,W/WASHER



TE Part # 287095-000  
44A0112-16-8



TE Part # 1586617-1  
04p mini umnl plug hsg spcl

TE Part # 6-1532166-6  
094-4105-9003=MCK-N1-X1-9PRT1

Documents

- CAD Files

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_413985-1\_P.2d\_dxf.zip

English

Customer View Model

ENG\_CVM\_CVM\_413985-1\_P.3d\_igs.zip

English



Customer View Model

[ENG\\_CVM\\_CVM\\_413985-1\\_P.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[SMB Connectors](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English