




LA92-M12-PF

Ruland Adjustable Clamping Lever, Lever Length 92mm, Tapped Hole M12, Plastic Lever, Steel Inserts

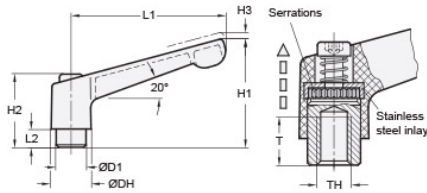

Description

Ruland LA92-M12-PF is an adjustable clamping handle with a 92mm handle, M12 tapped hole, 19mm insert diameter, and 65mm overall height. The handle is plastic and the inserts are steel with a black oxide finish for reduced weight and easier adjustment of the handle in light duty applications. LA92-M12-PF is commonly found in packaging, printing, food processing, and medical systems where conveyor rails, sensors, screens, and other components require frequent adjustments without the use of tools. The adjustable feature of this handle allows it to be used in confined spaces with limited hand access or where 360 degree rotation is not possible. Serrations connect the insert to the handle for easy disengagement. The user pulls the handle upwards by hand to disengage the serrations allowing it to be swiveled to the desired clamping position. Serrations automatically re-engage once the user releases the handle locking it in-place. A M12 tapped hole is designed to mate with an equivalently sized threaded stud or rod for a quick installation. LA92-M12-PF is black to seamlessly integrate with the aesthetics of most equipment. It is manufactured by JW Winco, stocked by Ruland, and RoHS3 and REACH compliant.

Product Specifications

Thread (TH)	M12	Lever Length L1	92 mm
Overall Height H1	65 mm	Hub Height H2	43 mm
Hub Diameter DH	25.2 mm	Handle Disengagement Travel H3	4 mm
Thread Depth T	17 mm	Thread Pitch	1.75 mm
Sleeve Length L2	11 mm	Sleeve Diameter D1	19 mm
Handle Material	Plastic	Handle Color	Black
Insert and Screw Material	Steel	Insert and Screw Finish	Black Oxide
Weight (lbs)	0.187500	Manufacturer	JW Winco/ Otto Ganter
UPC	634529237458	Country of Origin	USA
Tariff Code	3926.90.2500	UNSPC	31162807
Prop 65	⚠ WARNING This product can expose you to the chemicals Nickel (metallic) and Lead, known to the State of California to cause cancer and reproductive harm. For more information go to www.P65Warnings.ca.gov .		