

4-1393238-6 ✓ ACTIVE

SCHRACK | SCHRACK Power PCB Relay RT1

TE Internal #: 4-1393238-6

Power Relays, Standard, Monostable, DC, 250 mW Coil Power

Rating DC, 1440 Ω Coil Resistance, SCHRACK Power PCB Relay RT1

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays



Relay Type: **Standard**

Coil Magnetic System: **Monostable, DC**

Coil Power Rating DC: **250 mW**

Coil Resistance: **1440 Ω**

Coil Special Features: **Sensitive Version, UL Coil Insulation Class F**

Features

Product Type Features

Relay Type	Standard
------------	----------

Configuration Features

Insulation Special Features	Tracking Index of Relay Base PTI250
Coil Special Features	Sensitive Version, UL Coil Insulation Class F
Contact Arrangement	1 Form C (CO)
Contact Number of Poles	1

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1000 Vrms
Contact Limiting Making Current	15 A
Contact Limiting Continuous Current	10 A
Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms
Contact Limiting Breaking Current	10 A
Coil Power Rating DC	250 mW
Coil Resistance	1440 Ω
Coil Voltage Rating	24 VDC
Contact Current Rating	10 A
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC

Body Features

Product Weight	14 g [.494 oz]
----------------	----------------

Contact Features

Contact Material	AgNi90/10
------------------	-----------

Termination Features

Relay Connection Type	PCB Termination
-----------------------	-----------------

Terminal Configuration	Solder Pins
------------------------	-------------

Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

Dimensions

Insulation Clearance Between Contact & Coil	10 mm [.394 in]
---	-----------------

Insulation Creepage Between Contact & Coil	10 mm [.394 in]
--	-----------------

Product Width	12.7 mm [.5 in]
---------------	-----------------

Product Length	29 mm [1.14 in]
----------------	-----------------

Product Height	15.7 mm [.618 in]
----------------	-------------------

Usage Conditions

Environmental Ambient Temperature (Max)	85 °C [185 °F]
---	----------------

Operation/Application

Solder Process	Wave Solder
----------------	-------------

Coil Magnetic System	Monostable, DC
----------------------	----------------

Packaging Features

Packaging Method	Carton, Tube
------------------	--------------

Other

Length Class (Mechanical)	25 - 30 mm
---------------------------	------------

Insulation Initial Dielectric Between Coil & Contact Class	4000 - 5000 V
--	---------------

Insulation Creepage Class	8 mm
---------------------------	------

Insulation Clearance Class	8 mm
----------------------------	------

Height Class (Mechanical)	15 - 16 mm
---------------------------	------------

Coil Power Rating Class	200 - 300 mW
-------------------------	--------------

Width Class (Mechanical)	12 - 16 mm
--------------------------	------------

Contact Current Class	10 - 20 A, 5 - 10 A
-----------------------	---------------------

Product Compliance

For compliance documentation, visit the product page on [TE.com](https://te.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 260°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | [SCHRACK Power PCB Relay RT1](#)

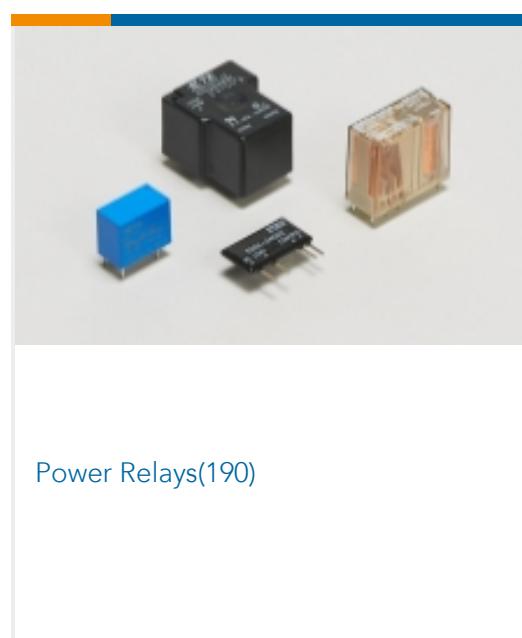

Power Relays(190)

Customers Also Bought

TE Part # 2-1462038-1
IM43NS=IM RELAY 100mW 5V BISTE Part # 4-1393789-5
V23079D2003B301TE Part # 8-2176070-2
3521 24K 1% 2WTE Part # 8-1415035-1
RT78724TE Part # 4-1625892-2
3W SM M/OX 5% 33KTE Part # 1-1393238-2
RTB14005TE Part # 1825002-9
ADF0604=DIP SWT,FLUSH,THRU/HLTE Part # 2350397-3
3 POS SPRING TB PLUG, PITCH 5.00TE Part # 1825190-7
DIP Shunt,8 posTE Part # 796858-4
4 POS TERMI-BLOK PLUG RT ANGLE

Documents

CAD Files

Customer View Model

[ENG_CVM_CVM_4-1393238-6_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393238-6_D.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_CVM_4-1393238-6_D.2d_dxf.zip](#)

English

[3D PDF](#)

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Power PCB Relay RT1 sensitive](#)

English

Product Specifications

[Definitions](#) [General Purpose Relays](#)

English

Agency Approvals

[VDE Certificate](#)

English