




MT8/8-ASJL-APC

Ruland Adjustable Two-Way Spring Joint, Clamp 8mm, Height 68mm, Lever Length 45mm, Powder Coated Aluminum

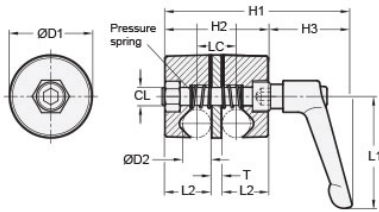

Description

Ruland MT8/8-ASJL-APC is an adjustable two-way spring joint with a 8mm clamping diameter, M6 clamp screw, 28mm base diameter, 45mm lever length, and 33mm overall length. It is designed to mate Ruland MT8 or the user's own round tubes and rods via a V-groove, allowing a greater tolerance to be bridged. MT8/8-ASJL-APC is aluminum with a powder coating, the lever is zinc die-cast with a plastic coating, and the inserts are stainless steel for added corrosion resistance. It is used in mounting systems for sensors, screens, reflectors, plexiglass machine guards, and other industrial components. The spring is made tighter or looser by adjusting the clamping lever allowing the user to rapidly adjust tubes as needed. MT8/8-ASJL-APC is manufactured by Otto Ganter, inventoried by Ruland, and RoHS3 compliant..

Product Specifications

Clamping Diameter D2	8 mm	Base Diameter D1	28 mm
Lever Length L1	45 mm	Lever Height H3	35 mm
Body Height H2	33 mm	Overall Height H1	68 mm
Surface To Edge L2	14 mm	Center To Center LC	13 mm
Spacer Thickness T	5 mm	Clamp Screw CL	M6
Weight (lbs)	0.209400	Material Specification	Powder Coated Aluminum
Manufacturer	JW Winco/ Otto Ganter	UPC	634529229958
Country of Origin	Taiwan	Tariff Code	7609.00.0000
UNSPC	31162908		

Note 1 Performance ratings are for guidance only. The user must determine suitability for a particular application.

Prop 65  **WARNING** This product can expose you to chemicals including Soots, Benzene, Lead, and Nickel (metallic), known to the State of California to cause cancer, and Lead and Benzene known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.