

2005248-1  ACTIVE

### Power Double Lock

TE Internal #: 2005248-1

Rectangular Power Connectors, Housing, Receptacle, Wire-to-Wire,  
2 Position, 3.96 mm [.156 in] Centerline, Wire & Cable, UL 94V-0,  
Power Double Lock

[View on TE.com >](#)



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Receptacle**

Connector System: **Wire-to-Wire**

Number of Positions: **2**

Centerline (Pitch): **3.96 mm [.156 in]**

## Features

### Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

### Configuration Features

Number of Positions	2
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	1

### Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------

### Contact Features

Multiple Contact Types	Without
------------------------	---------

Contact Layout	Inline
Contact Retention Within Housing	Without
Contact Type	Tab

#### Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

#### Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)

#### Housing Features

Centerline (Pitch)	3.96 mm [.156 in]
Housing Color	Natural
Housing Material	PA 66

#### Dimensions

Connector Height	26.1 mm [1.02 in]
Product Width	9.94 mm [.391 in]
Product Length	9.94 mm [.391 in]

#### Usage Conditions

Operating Temperature Range	-30 - 105 °C [-22 - 221 °F]
-----------------------------	-----------------------------

#### Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

#### Identification Marking

Circuit Identification Feature	Without
--------------------------------	---------

#### Industry Standards

CSA Rating	Certified
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL, VDE
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-0
Glow Wire Rating	GWT 750°C (Without Flame)

#### Packaging Features

Packaging Quantity	1
--------------------	---

Packaging Method

Bag

## Product Compliance

For compliance documentation, visit the product page on [TE.com](http://TE.com)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


## Compatible Parts

	
TE Part # 179463-1 POWER DBL LOCK CAP HSG F/H 2P	TE Part # 2005247-4 PDL 2P PLUG 3.96(GWT) YEL


## Also in the Series | [Power Double Lock](#)

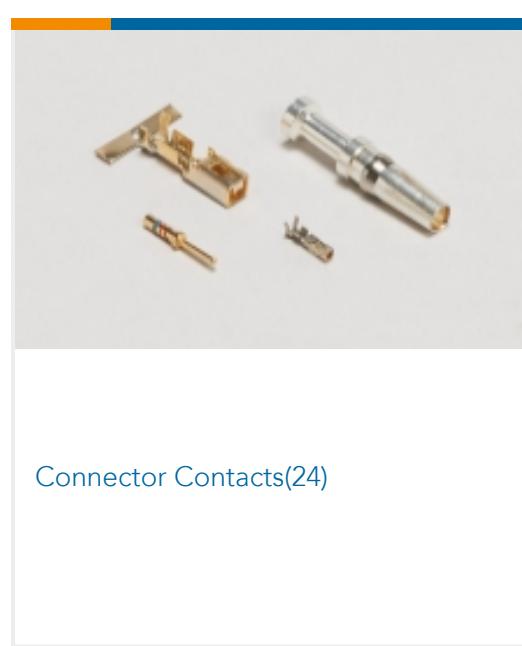


Connector Contacts(24)

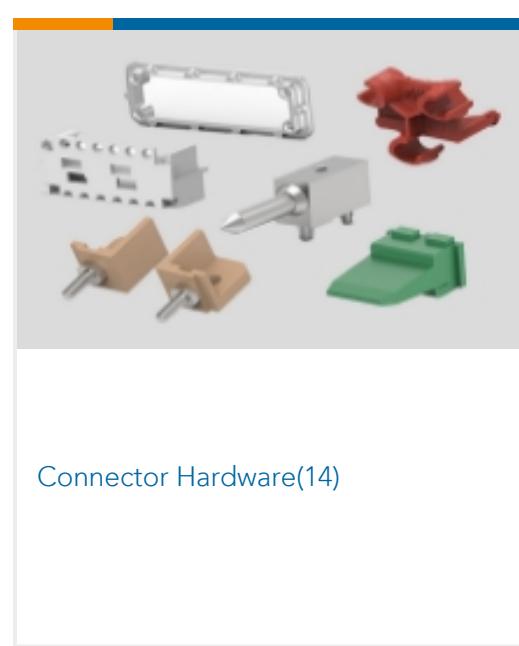

Connector Hardware(14)

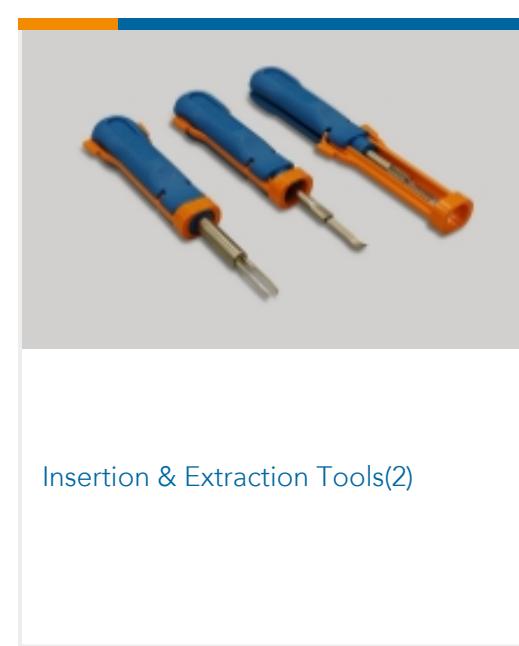

Insertion &amp; Extraction Tools(2)

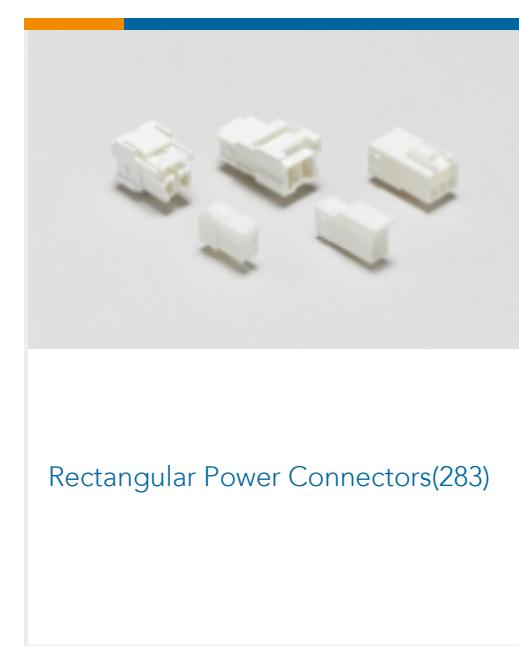

Rectangular Power Connectors(283)

## Customers Also Bought

TE Part # 316089-1  
2.5 SIGNAL DBL LOCK CAP HSG 5PTE Part # 177917-1  
AMP POWER DBL LOCK TAB (L)TE Part # 6-1971775-3  
PTL 2X3 CAP PANEL MT HIGH TEMP  
KEY B REDTE Part # 1744416-7  
7 POS EP II HSG, GLOW WIRETE Part # 737439-2  
250 FASTON REC 22-18 AWG TPBRTE Part # 368572-1  
PDL 3P CAP 3.96 F/H(GWT) NATTE Part # 2-1241965-4  
STD TIMER PLUG HSG 4P W/EXT.  
LOCKINGTE Part # 5-1241961-7  
STD TIMER PLUG HSG 3P MK2

## Documents

### Product Drawings

[PDL 2P CAP 3.96 F/H\(GWT\) NAT](#)

English

### CAD Files

[3D PDF](#)

3D

### Customer View Model

[ENG\\_CVM\\_CVM\\_2005248-1\\_B.2d\\_dxf.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_2005248-1\\_B.3d\\_igs.zip](#)

English

### Customer View Model

[ENG\\_CVM\\_CVM\\_2005248-1\\_B.3d\\_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

---

**Product Specifications**

**Engineering Report**

English