




Connectors > Audio & Video Connectors > USB Connectors

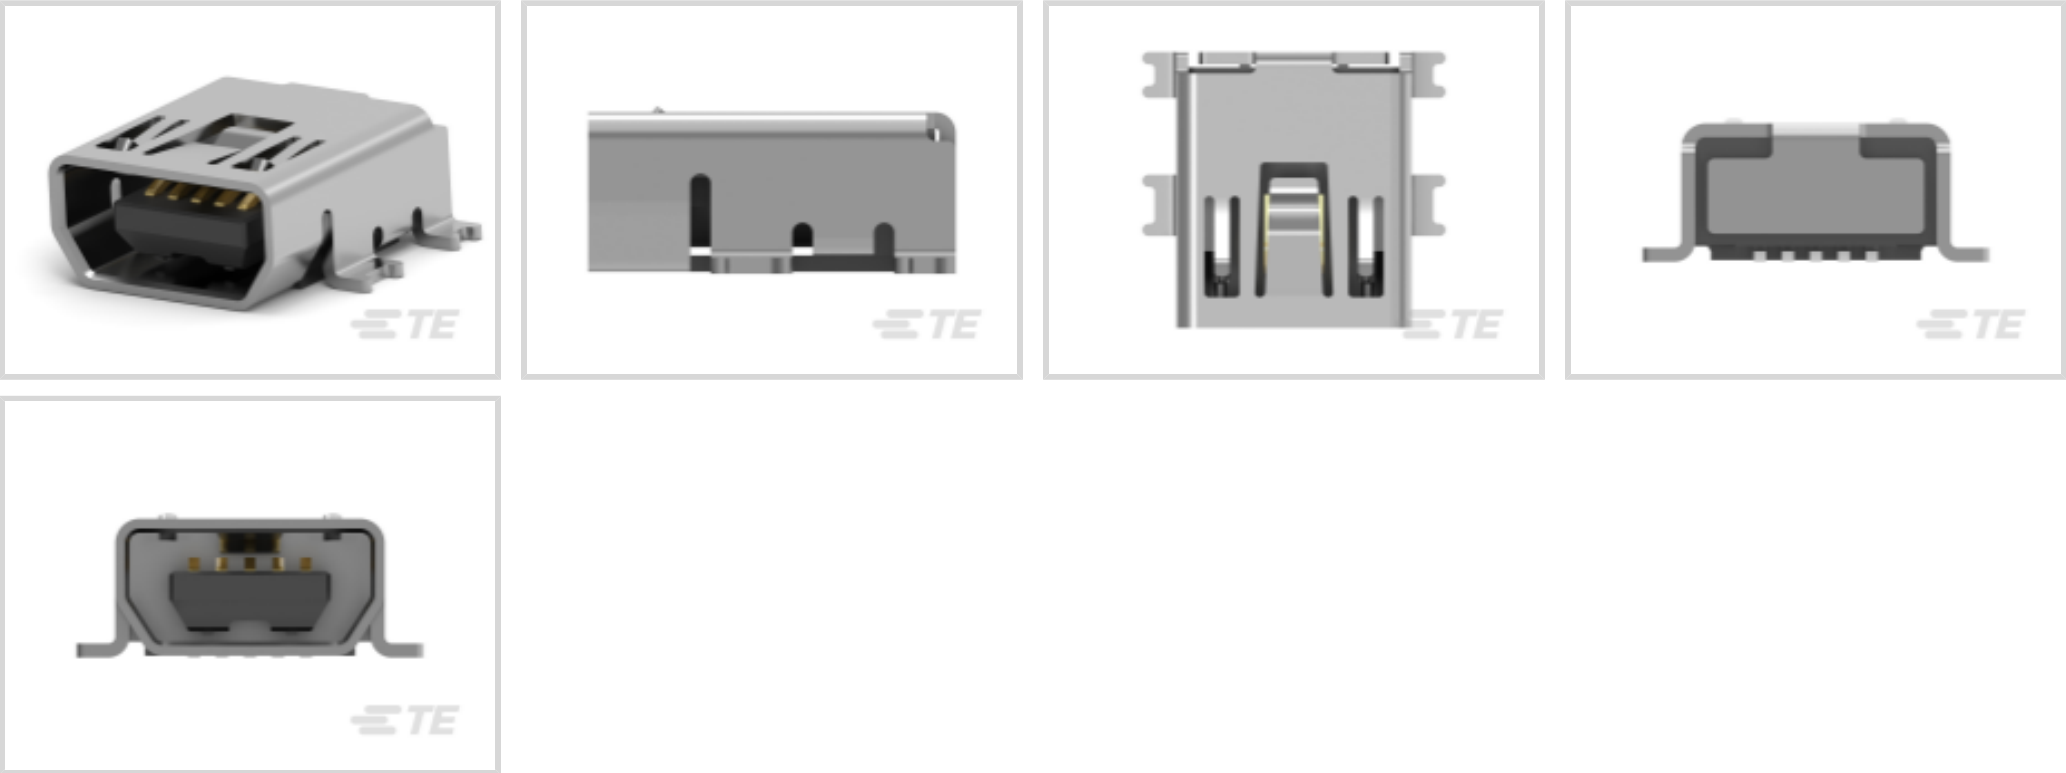

USB Adapter Type: **A/B**

USB Version: **2.0**

Connector Profile: **Mini**

Connector & Housing Type: **Receptacle**

Number of Ports: **1**

Features

Product Type Features

Integral Locking Latch	Without
USB Adapter Type	A/B
USB Version	2.0
Connector & Housing Type	Receptacle
Connector System	Cable-to-Board
Connector & Contact Terminates To	Printed Circuit Board
USB Connector Type	Mini USB 2.0 Type-AB

Configuration Features

Number of Ports	1
Number of Positions	5

Body Features

Offset	0 mm
Shell Plating Finish	Bright
Shell Plating Material	Tin over Copper



Connector Profile	Mini
Contact Features	
Contact Mating Area Plating Material Thickness	.76 µm[29.92 µin]
Contact Mating Area Plating Material	Gold Flash over Palladium Nickel
Contact Current Rating (Max)	1 A
Termination Features	
Termination Post & Tail Length	1.15 mm[.045 in]
Termination Method to Printed Circuit Board	Surface Mount
Mechanical Attachment	
Locking Feature	With
PCB Mount Location	Top
PCB Connector Seating	Flush
PCB Mount Retention Type	Hold-Down
Connector Mounting Type	Board Mount
Housing Features	
Housing Material	PA 6T
Housing Color	Black
Body Orientation	Right Angle
Centerline (Pitch)	.8 mm[.031 in]
Dimensions	
PCB Thickness (Recommended)	1 mm[.039 in]
Usage Conditions	
Soldering Temperature (Max)	260 °C[500 °F]
Mating Cycles (Max)	5000
Operating Temperature Range	-20 - 60 °C[-4 - 140 °F]
Operation/Application	
Halogen Free	No
Assembly Process Feature	Carrier Tape
Circuit Application	Power & Signal
Industry Standards	
Moisture Sensitivity Level	1
Industry Standard	USB 2.0



UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Quantity	700
Packaging Method	Tape & Reel

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JUNE 2022 (224) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 1734205-1
MINI USB, TYPE B, PLUG. CABLE-KIT



TE Part # 1496476-1
STD USB-A TO MINI-B ASSY, 1M



TE Part # 1929690-1
USB CABLE, USB A to Mini USB,Blue



Customers Also Bought




TE Part # 2-2176230-8
3522 150R 5% 3W




TE Part # 2309409-1
DDR4 SODIMM 260P 5.2H STD



TE Part # TAA756A5501-020
M12A5-MS-FR-PUR-2.0M

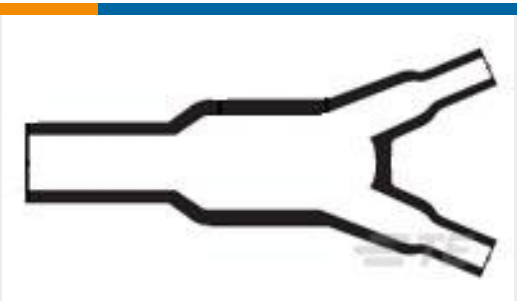

TE Part # 823765-000
382A023-3-0

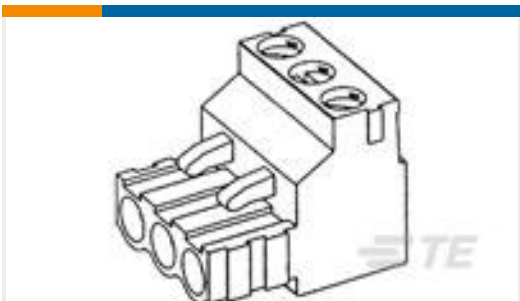

TE Part # 282807-4
TERMI-BLOK PLUG STACKING 4P.5,



TE Part # 6-2176087-5
RP 1J 0.166W 324R 0.1% 25PPM 1K RL



TE Part # 1-2176304-9
RP 1E 0.1W 15R4 0.1% 25PPM 5K RL



TE Part # 1513634-1
400411LF Molded Stamped Antenna



TE Part # L9000279-01
SMA Jack 50 Ohm .062 PCB Edge Mount



TE Part # 4-2176610-6
EP 1W (SS) 75R 5%

Documents

- CAD Files

Customer View Model

ENG_CVM_CVM_1775051-1_A.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1775051-1_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1775051-1_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

- Product Specifications

Crimping of AMP Lattice Contact

English



Crimping of AMP Lattice Contact

English

Agency Approvals

UL Report

English