

PERFECT cable gland

50.6xx M/BS

Dome nut	Brass CuZn39Pb3, nickel-plated
Cable guarding spring	Stainless steel 1.4305
Lamellar insert	Polyamide PA6 V-2
Sealing ring	Polychloroprene-Nitrile rubber CR/NBR
Gland body	Brass CuZn39Pb3, nickel-plated
O-ring	Nitrile rubber NBR
Connecting thread	metric, as per EN 60423




Properties

- with bending protection and cable guarding
- for permanent protection of flexible cables when inserted in enclosures
- reducing bending loads
- protects against cable core break
- integrated anchorage
- protection against twisting
- wide sealing and clamping range
- easy-to-install

Temperature range -20 °C / +100 °C (dynamic)
-40 °C (static, short term)

Protection grade IP68
5 bar

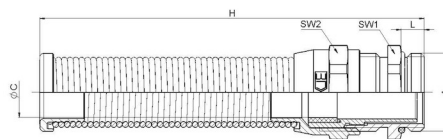

Features

Connecting thread standard length

A	ØC	L	SW1	SW2	H	 VPE	Part No.
M16x1,5	5 - 9	5	17	17	81	5	50.616 M/BS
M20x1,5	9 - 13	6	22	22	100	5	50.620 M/BS
M25x1,5	11 - 16	7	27	27	120	5	50.625 M/BS