

STANDARD EXECUTIONS

AISI 304 stainless steel clamping screw and nut, AISI 301 stainless steel spring:


- **MSM-TW-A-MT**: natural aluminium, sand-blasted matte finish.
- **MSM-TW-A-SW**: aluminium, with black epoxy resin coating RAL 9005.

GN 300.1 adjustable handle, with lever coated in epoxy resin, RAL 9006 grey colour:


- **MSM-TW-B-MT**: natural aluminium, sand-blasted matte finish.
- **MSM-TW-B-SW**: aluminium, with black epoxy resin coating RAL 9005.

FEATURES AND APPLICATIONS

MSM-TW pivoting connecting clamps allow the fixing of tubes or shafts. The particular prism shape of the clamping parts facilitates the adjustment to the diameter of the tube or shaft. The pressure springs make the locking and unlocking operations quick and easy.



MSM-TW-A-MT
MSM-TW-A-SW

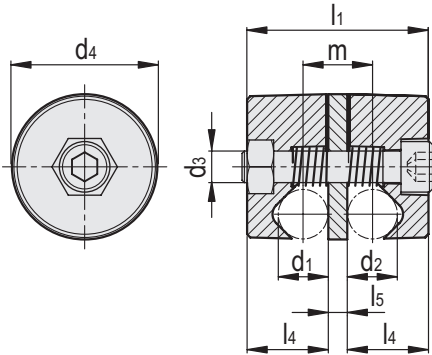

Conversion Table	
1 mm = 0.039 inch	
d4	
mm	inch
28	1.09
32	1.25
36	1.40
46	1.79
56	2.18


MSM-TW-A-MT

Code	Description	d1	d2	d3	d4	l1	l4	l5	m	⚖
500751	MSM-TW-28-8-A-MT	8	8	M6	28	33	14	5	13	52
500761	MSM-TW-32-10-A-MT	10	10	M8	32	45	20	5	15	96
500771	MSM-TW-36-12-A-MT	12	12	M8	36	47	21	5	17	118
500422	MSM-TW-46-14-A-MT	14	14	M8	46	57	25.5	6	20	373
500429	MSM-TW-46-15-A-MT	15	15	M10	46	57	25.5	6	21	393
500781	MSM-TW-46-16-A-MT	16	16	M10	46	57	25.5	6	22	521
500437	MSM-TW-56-18-A-MT	18	18	M10	56	63	28.5	6	24	549
500443	MSM-TW-56-20-A-MT	20	20	M10	56	65	28.5	8	28	630

MSM-TW-A-SW

Code	Description	d1	d2	d3	d4	l1	l4	l5	m	⚖
500752	MSM-TW-28-8-A-SW	8	8	M6	28	33	14	5	13	52
500762	MSM-TW-32-10-A-SW	10	10	M8	32	45	20	5	15	96
500772	MSM-TW-36-12-A-SW	12	12	M8	36	47	21	5	17	118
500425	MSM-TW-46-14-A-SW	14	14	M8	46	57	25.5	6	20	373
500431	MSM-TW-46-15-A-SW	15	15	M10	46	57	25.5	6	21	393
500782	MSM-TW-46-16-A-SW	16	16	M10	46	57	25.5	6	22	521
500439	MSM-TW-56-18-A-SW	18	18	M10	56	63	28.5	6	24	549
500445	MSM-TW-56-20-A-SW	20	20	M10	56	65	28.5	8	28	630

Conversion Table	
1 mm = 0.039 inch	
d4	
mm	inch
28	1.09
32	1.25
36	1.40
46	1.79
56	2.18

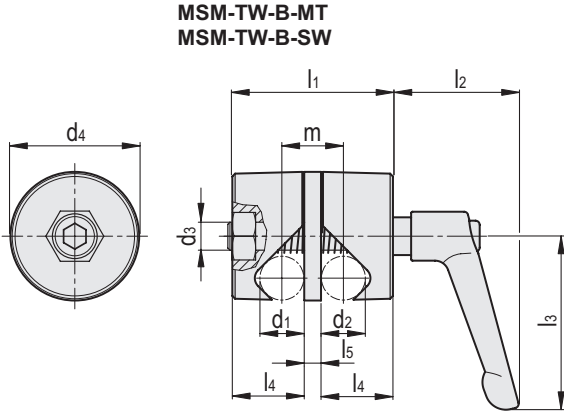

MSM-TW-B-MT

METRIC

Code	Description	d1	d2	d3	d4	l1	l2	l3	l4	l5	m	⚖
500753	MSM-TW-28-8-B-MT	8	8	M6	28	33	35	45	14	5	13	89
500763	MSM-TW-32-10-B-MT	10	10	M8	32	45	45	63	20	5	15	179
500773	MSM-TW-36-12-B-MT	12	12	M8	36	47	45	63	21	5	17	190
500426	MSM-TW-46-14-B-MT	14	14	M8	46	57	55	78	25.5	6	20	503
500432	MSM-TW-46-15-B-MT	15	15	M10	46	57	55	78	25.5	6	21	526
500783	MSM-TW-46-16-B-MT	16	16	M10	46	57	55	78	25.5	6	22	657
500440	MSM-TW-56-18-B-MT	18	18	M10	56	63	55	78	28.5	6	24	682
500446	MSM-TW-56-20-B-MT	20	20	M10	56	65	55	78	28.5	8	28	763

MSM-TW-B-SW

Code	Description	d1	d2	d3	d4	l1	l2	l3	l4	l5	m	⚖
500754	MSM-TW-28-8-B-SW	8	8	M6	28	33	35	45	14	5	13	89
500764	MSM-TW-32-10-B-SW	10	10	M8	32	45	45	63	20	5	15	179
500774	MSM-TW-36-12-B-SW	12	12	M8	36	47	45	63	21	5	17	190
500428	MSM-TW-46-14-B-SW	14	14	M8	46	57	55	78	25.5	6	20	503
500434	MSM-TW-46-15-B-SW	15	15	M10	46	57	55	78	25.5	6	21	526
500784	MSM-TW-46-16-B-SW	16	16	M10	46	57	55	78	25.5	6	22	657
500442	MSM-TW-56-18-B-SW	18	18	M10	56	63	55	78	28.5	6	24	682
500448	MSM-TW-56-20-B-SW	20	20	M10	56	65	55	78	28.5	8	28	763