




Connectors > Contacts > RF Contacts

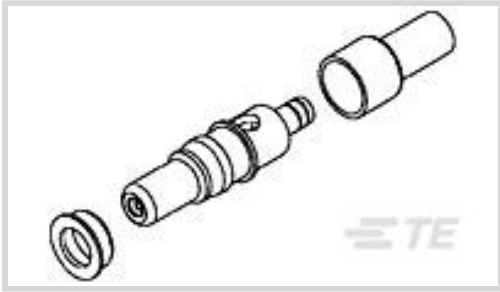

Contact Type: **Pin**
RF Contact Style: **Coax**
Number of Positions: **1**
Connector & Contact Terminates To: **Wire & Cable**
Contact Orientation: **Straight**

Features

Product Type Features

RF Contact Style	Coax
Connector & Contact Terminates To	Wire & Cable
Compatible With RF Cable Type	RG 179, RG 179A, RG 179B, RG 187, RG 187A

Configuration Features

Number of Positions	1
---------------------	---

Electrical Characteristics

Impedance Options	Non-Matched
-------------------	-------------

Body Features

	30 µin
Shell Base Material	Brass
Shell Plating Material	Gold

Contact Features

	30 µin
Contact Base Material	Beryllium Copper
Contact Type	Pin
Contact Orientation	Straight
Contact Mating Area Plating Material	Gold
Contact Mating Retention	Without



Contact Current Rating (Max)	1 A
------------------------------	-----

Usage Conditions

Operating Temperature Range	-55 - 125 °C[-67 - 257 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Packaging Features

Packaging Method	Carton
------------------	--------

Other

Dielectric Material	PTFE
---------------------	------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Pb (4% in Contact/Component) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 318813-1
EXTRACTION TOOL ASSY

Customers Also Bought



TE Part # 6-1879336-1
CPF 0603 976R 1% 50PPM 1K RL




TE Part # 8-2176407-4
3560 12R 5%




TE Part # 2-2176406-8
3560 13R 1%



TE Part # 4-1879350-5
RR01 5% 15R AMMO

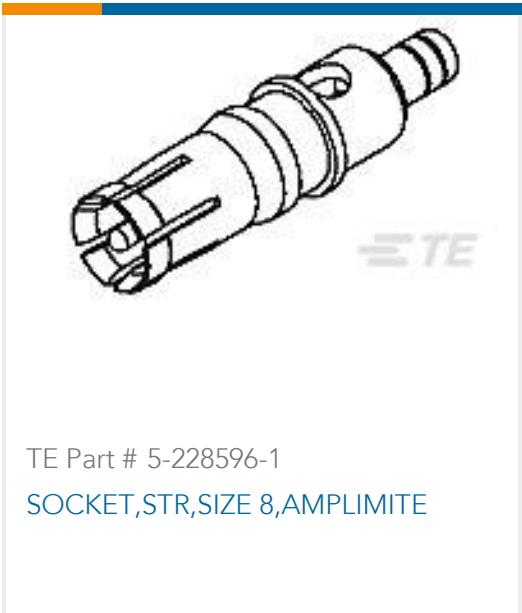

TE Part # 5-228596-1
SOCKET,STR,SIZE 8,AMPLIMITE

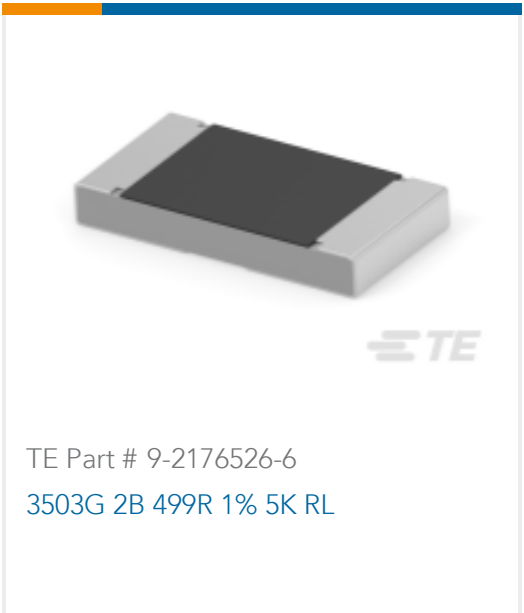

TE Part # 9-2176526-6
3503G 2B 499R 1% 5K RL



TE Part # 1-2176526-1
3503G 2B 64R9 1% 5K RL



TE Part # 1-2176458-5
CPF 1206 1R4 0.1% 25ppm 1K RL

Documents

Product Drawings

PIN,STRAIGHT,SIZE 8,AMPLIMITE

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-228618-2_M.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-228618-2_M.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-228618-2_M.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

5-228618-2

Coax, Pin Contact, 1 Position, Wire & Cable, Straight, RG 179A / RG 179 / RG 187A,
Gold, 1 A, Power & Signal, -67 - 257 °F [-55 - 125 °C]

