



TE Internal #: 1-1719434-3  
Housing for Female Terminals, Wire-to-Wire, 4 Position, .276 in [7 mm] Centerline, Sealable, Black, Cable Mount (Free-Hanging)  
[View on TE.com >](#)

Connectors > Automotive Connectors > Automotive Housings > Circular DIN Housings



Connector System: **Wire-to-Wire**  
Number of Positions: **4**  
Connector & Housing Type: **Housing for Female Terminals**  
Centerline (Pitch): **7 mm [ .276 in ]**  
Sealable: **Yes**

[All Circular DIN Housings \(59\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Circular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Female Terminals
Sealable	Yes
Primary Locking Feature	On the Terminal

Configuration Features

Blank Cavity Position	3, 4
Number of Positions	4

Electrical Characteristics

Operating Voltage	48 VDC
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V

Body Features

--	--



Cable Exit Angle	180°
Primary Product Color	Black
Connector & Keying Code	1

Contact Features

Contact Size	2.5mm
Contact Type	Socket
Mating Pin Diameter	2.5 mm[.098 in]

Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PBT GF
Centerline (Pitch)	7 mm[.276 in]

Dimensions

Connector Height	32.8 mm[1.291 in]
Product Width	31 mm[1.22 in]
Product Length	32.8 mm[1.29 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 - 120 °C[-40 - 248 °F]

Industry Standards

Degree of Protection	IP67, IP69K
UL Flammability Rating	UL 94HB

Packaging Features

Packaging Quantity	700
Packaging Method	Box

Other



Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-C4962-B128  
Circular DIN Backshells



TE Part # 828922-1  
2,5MM CAVITY PLUG FOR 5,4MM DI



TE Part # CAT-R7602-T273  
ROUND CONNECTOR SYSTEM, PIN AND SOCKET



TE Part # 1-967402-3  
2,5MM ST-GEH KPL 2P





TE Part # 185636-1  
PROTECT CAP 2.5MM PLUG




TE Part # 185792-1  
180 DEG CAP FOR CORRUGTD TUBE




TE Part # 828920-1  
EINZELADERDICHUNG


Customers Also Bought




TE Part # 1-1563759-1  
Heavy Duty Sealed Connector Series Housings

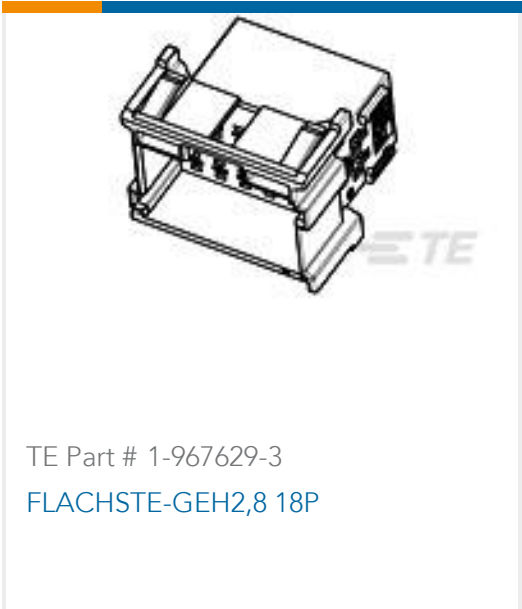


TE Part # 1-967629-3  
FLACHSTE-GEH2,8 18P




TE Part # 8-968972-2  
MCP2.8 GEH ASSY 12P




TE Part # 927768-1  
JPT REC 2.8 Contact SRC Sn



TE Part # 1-1718485-5  
CARRIER FOR RECEPT. INSERTS 36 POS

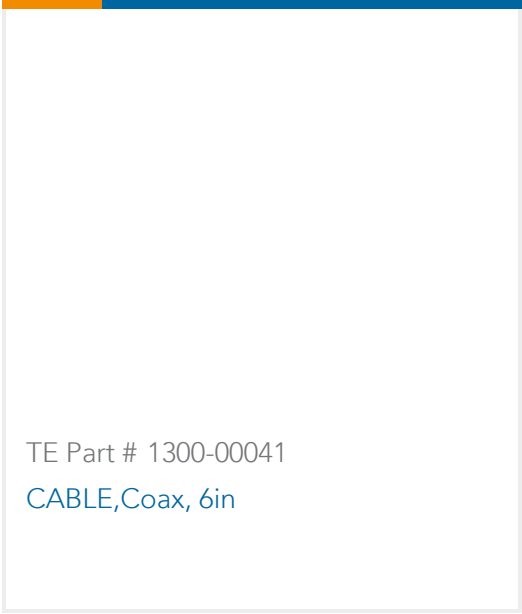

TE Part # 1300-00041  
CABLE,Coax, 6in



TE Part # 1745027-1  
2 POS SPLASH PROOF ASSY WITH CLOSED CAVI

Documents

Product Drawings  
4 POS DIA 2.5 SOCKET CONNECTOR HSG  
English

CAD Files  
3D PDF  
3D  
Customer View Model  
ENG\_CVM\_CVM\_1-1719434-3\_B\_c-1-1719434-3-b.2d\_dxf.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_1-1719434-3\_B\_c-1-1719434-3-b.3d\_igs.zip  
English  
Customer View Model  
ENG\_CVM\_CVM\_1-1719434-3\_B\_c-1-1719434-3-b.3d\_stp.zip  
English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

1-1719434-3

Housing for Female Terminals, Wire-to-Wire, 4 Position, .276 in [7 mm] Centerline, Sealable, Black, Cable Mount (Free-Hanging)



Product Specifications

Product Specification

English