

5746613-2 ACTIVE

AMP-LATCH


TE Internal #: 5746613-2

Ribbon Cable Connectors, Wire-to-Board, 14 Position, 2.54 mm [.1 in] Centerline, Vertical, Through Hole - Solder, 2 Row, Plug

[View on TE.com >](#)



Connectors > PCB Connectors > Wire-to-Board Connectors > FFC, FPC & Ribbon Connectors > Ribbon Cable Connectors

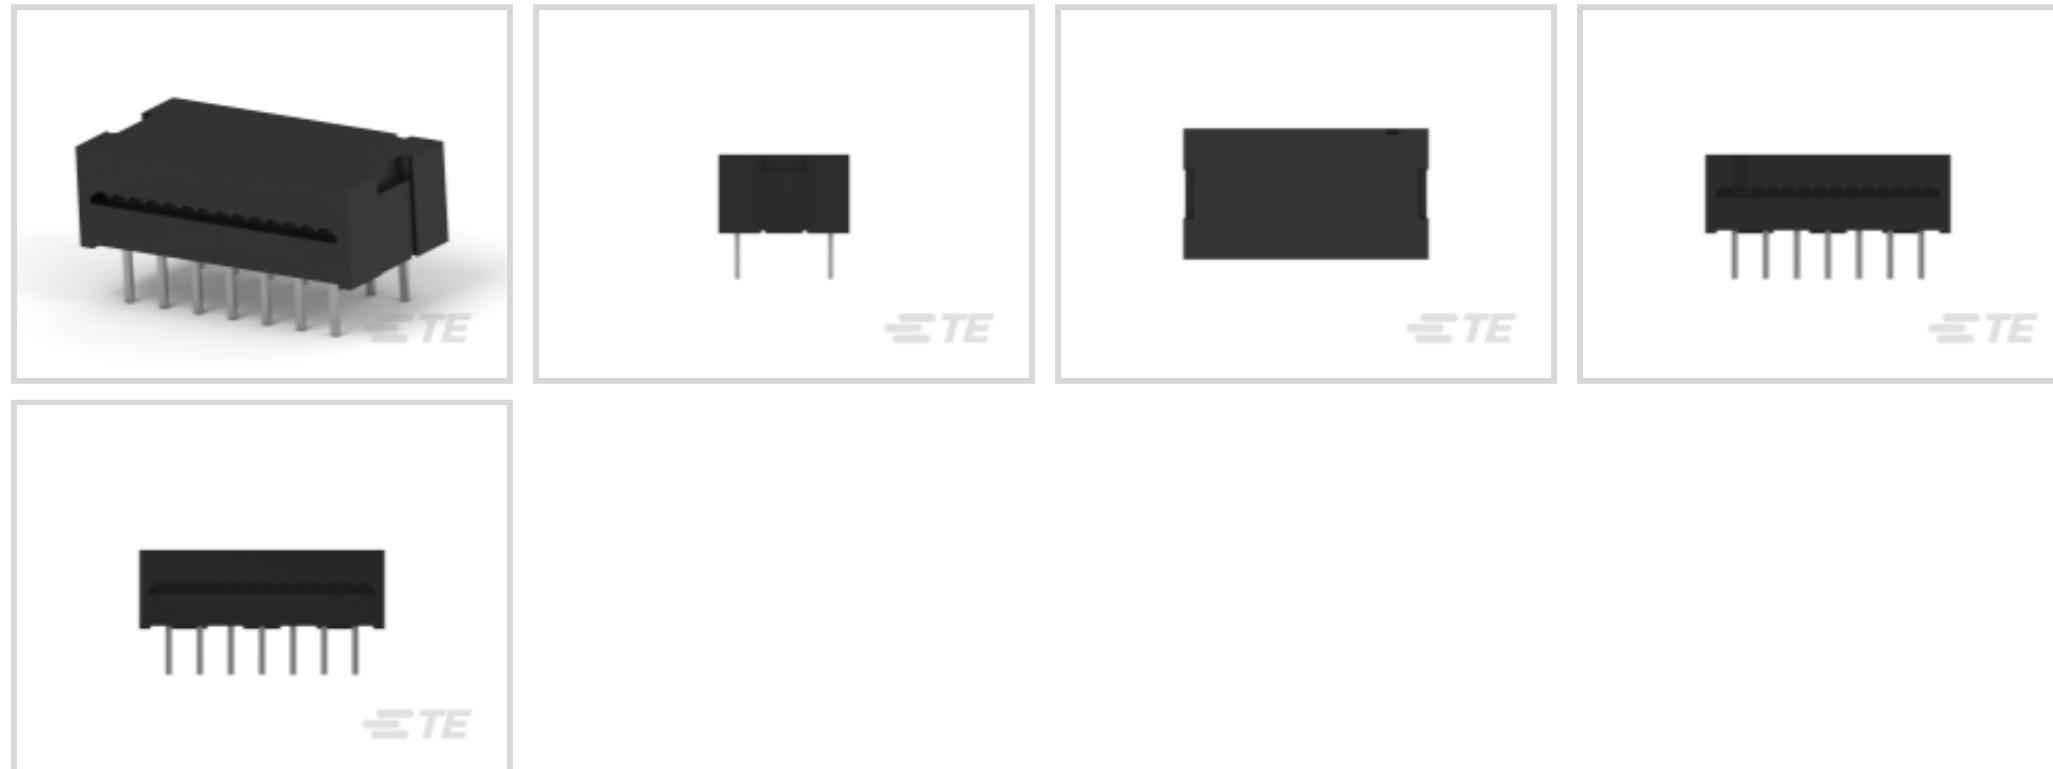

Connector System: **Wire-to-Board**

Number of Positions: **14**

Centerline (Pitch): **2.54 mm [.1 in]**

PCB Mount Retention: **Without**

PCB Mount Orientation: **Vertical**

Features

Product Type Features

| | |
|-----------------------------------|-------------------------------------|
| Connector Product Type | Connector Assembly |
| Connector System | Wire-to-Board |
| Connector & Housing Type | Plug |
| Connector & Contact Terminates To | Printed Circuit Board, Wire & Cable |

Configuration Features

| | |
|-----------------------|----------|
| Number of Positions | 14 |
| PCB Mount Orientation | Vertical |
| Number of Rows | 2 |

Electrical Characteristics

| | |
|-----------------------|---------|
| Insulation Resistance | 5000 MΩ |
| Operating Voltage | 250 VAC |

Body Features

| | |
|-----------------------|-------|
| Primary Product Color | Black |
|-----------------------|-------|

Contact Features

| | |
|---|---|
| PCB Contact Termination Area Plating Material Thickness | 2.54 - 5.08 μm [100 - 200 μin] |
| Contact Layout | Inline |
| Contact Type | Pin |
| Wire Contact Termination Area Plating Thickness | .127 μm [5 μin] |
| Wire Contact Termination Area Plating Material | Gold |
| Contact Mating Area Plating Material Thickness | 2.54 μm [100 μin] |
| PCB Contact Termination Area Plating Material | Tin |
| Contact Base Material | Phosphor Bronze |
| Contact Current Rating (Max) | 1 A |

Termination Features

| | |
|---|-------------------------------|
| Rectangular Termination Post & Tail Thickness | .33 mm[.013 in] |
| Rectangular Termination Post & Tail Width | .48 mm[.019 in] |
| Termination Post & Tail Length | 3.94 mm[.155 in] |
| Termination Method to Wire & Cable | Insulation Displacement (IDC) |
| Termination Method to Printed Circuit Board | Through Hole - Solder |

Mechanical Attachment

| | |
|-------------------------|--------------|
| Mating Alignment | With |
| PCB Mount Alignment | Without |
| Panel Mount Feature | Without |
| PCB Mount Retention | Without |
| Mating Alignment Type | Polarization |
| Mating Retention | Without |
| Connector Mounting Type | Board Mount |

Housing Features

| | |
|--------------------|----------------|
| Centerline (Pitch) | 2.54 mm[.1 in] |
|--------------------|----------------|

Dimensions

| | |
|--------------------------------------|-------------------------------|
| Connector Length | 20.02 mm[.788 in] |
| Connector Height | 6.43 mm[.253 in] |
| Connector Width | 7.06 mm[.278 in] |
| Wire Size | .051 - .15 mm ² |
| PCB Thickness (Recommended) | 3.18 mm[.125 in] |
| Compatible Insulation Diameter Range | .81 - 1.07 mm[.032 - .042 in] |
| Row-to-Row Spacing | 2 mm[.1 in] |

Usage Conditions

| | |
|-----------------------------|-----------------------------|
| Operating Temperature Range | -65 - 105 °C [-85 - 221 °F] |
|-----------------------------|-----------------------------|

Operation/Application

| | |
|---------------------|--------|
| Circuit Application | Signal |
|---------------------|--------|

Industry Standards

| | |
|---|-----------------------|
| UL Rating | Recognized |
| Compatible With Agency/Standards Products | CSA, UL |
| Compatible With Approved Standards Products | CSA LR7189, UL E28476 |
| UL Flammability Rating | UL 94V-0 |

Packaging Features

| | |
|--------------------|------------------|
| Packaging Quantity | 288 |
| Packaging Method | Box & Tray, Tray |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| | |
|---|---|
| EU RoHS Directive 2011/65/EU | Compliant |
| EU ELV Directive 2000/53/EC | Compliant |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC |
| Halogen Content | Not Low Halogen - contains Br or Cl > 900 ppm. |
| Solder Process Capability | Wave solder capable to 265°C |


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 746611-8
14 DIP PLUG CONN-W/COVER

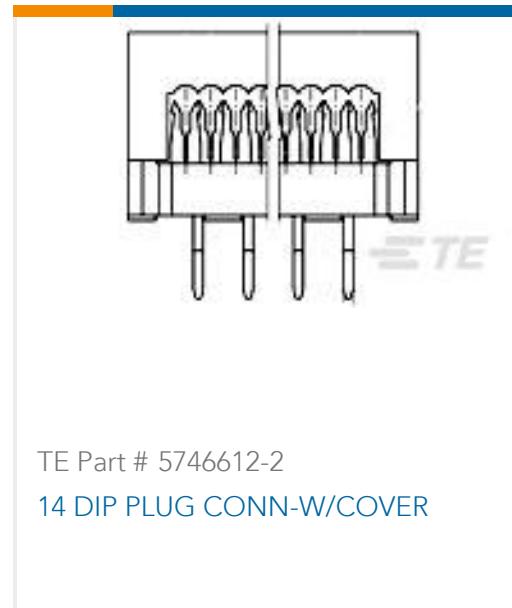

TE Part # 5746612-2
14 DIP PLUG CONN-W/COVER

Customers Also Bought



TE Part # 5499910-4
AMP-LATCH UNIVERSAL HEADERS



TE Part # 2-5331677-2
SOCKET,MIN-SPR W/H SN-AU SER-3



TE Part # 2-746610-1
010 DIP PLUG 100CL TIN



TE Part # 8-1437652-2
6PCV-05-006=6PCV ASSEMBLY



TE Part # 6-1437652-7
6PCV-04-006=6PCV ASSEMBLY



TE Part # 282847-6
TERMI-BLOK PCB MOUNT 35 6P.5



TE Part # 6-1437648-7
4PCV-04-006=4PCV ASSEMBLY



TE Part # 4-1462000-1
C93419=MT RELAY 200 MW 24 V

Documents

Product Drawings

14 DIP PLUG CONN-W/COVER

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_5746613-2_B.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5746613-2_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_5746613-2_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Ribbon Cable Interconnect Solutions](#)

English

Product Specifications

[Application Specification](#)

English

Instruction Sheets

[Instruction Sheet \(U.S.\)](#)

English