

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , Input Rating: , , Output Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con Model No. <a href="#">Connector</a> Part No./Ordering No. <a href="#">JACK-USBC-6SMT-2SL</a>	Rev A1
---	--	--------

In Addition to GlobTek Inc.'s renewed ISO9001:2008 - Quality Management System Certification, GlobTek Inc. is now certified to:

ISO13485:2003 - Medical Devices Quality Management System Certification

ISO14001:2004 - Environmental Management System Certification

ISO Certificates are available online at <http://www.globtek.com/iso-certificates/>

The acceptance of this specification and use of the product described in this document indicates the acceptance and binding of the customer to Globtek TERMS AND CONDITIONS (attached to the end of this document), which supersede all other agreements, terms, and conditions (<http://www.globtek.com/terms-and-conditions/>).

Prop 65 Statement: <https://www.globtek.com/prop-65-statement.pdf>

Footnote:

GlobTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instruction.

Limitation of Use:

GlobTek products are intended for use with commercial, medical, and/or industrial equipment only. GlobTek products are not authorized for use as mission critical components in life support hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobTek Inc.

Contents of this document are subject to change without prior notice.

Customer Approval of Specification:

Please approve, sign and send back to GlobTek so we can complete order processing.

A delay in receipt of this form will delay delivery schedule.

Company Name:

Customer P/N:

Quote Number:

Date:

Authorized Representative Name:

Authorized Representative Signature:

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , , Input Rating: , , Output Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con			
	Model No. <a href="#">Connector</a>			
	Part No./Ordering No. <a href="#">JACK-USBC-6SMT-2SL</a>			Rev A1

## REVISION HISTORY

REV	DESCRIPTION	SUB	DATE	APPROVED
A1	Update to SF format	QA	07/24/2022	QA
A	Initial release	QA	06/14/2019	QA

3D CAD FILE:

<http://www.globtek.com/dl/JACK-USBC-6SMT-2SL.stp>

### AGENCY ONLINE DOCUMENTS

RoHS/RoHS3 Declaration	<a href="https://www.globtek.com/pdf/rohs_cert/01t3a000005CR0mAAG">https://www.globtek.com/pdf/rohs_cert/01t3a000005CR0mAAG</a>
REACH Declaration	<a href="https://www.globtek.com/pdf/iso_certificates/REACH.pdf">https://www.globtek.com/pdf/iso_certificates/REACH.pdf</a>
Conflict Minerals Declaration	<a href="https://www.globtek.com/pdf/conflict-minerals.pdf">https://www.globtek.com/pdf/conflict-minerals.pdf</a>
Prop 65 Statement	<a href="https://en.globtek.com/prop-65-statement.pdf">https://en.globtek.com/prop-65-statement.pdf</a>

IPXY rating is based on 3rd party testing and customers should check suitability and test system level IPXY rating before ordering.

### PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2020 - 2024

guest /05/27/2024 2:34:55 PM CLONED FROM JACK-USBC-24SMT-THSS



GlobTek, Inc.  
 www.globtek.com  
 186 Veterans Drive,  
 Northvale, NJ 07647  
 Tel. (201) 784-1000  
 Fax (201) 784-0111

Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , Input Rating: , , Output Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con

Model No. [Connector](#)

Part No./Ordering No. [JACK-USBC-6SMT-2SL](#)

Rev A1

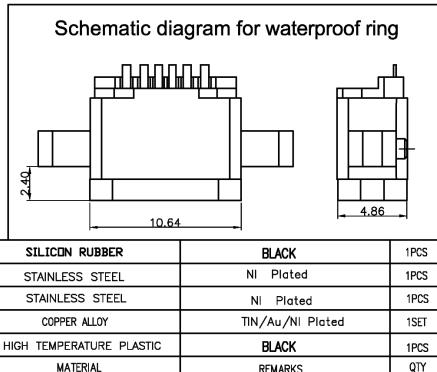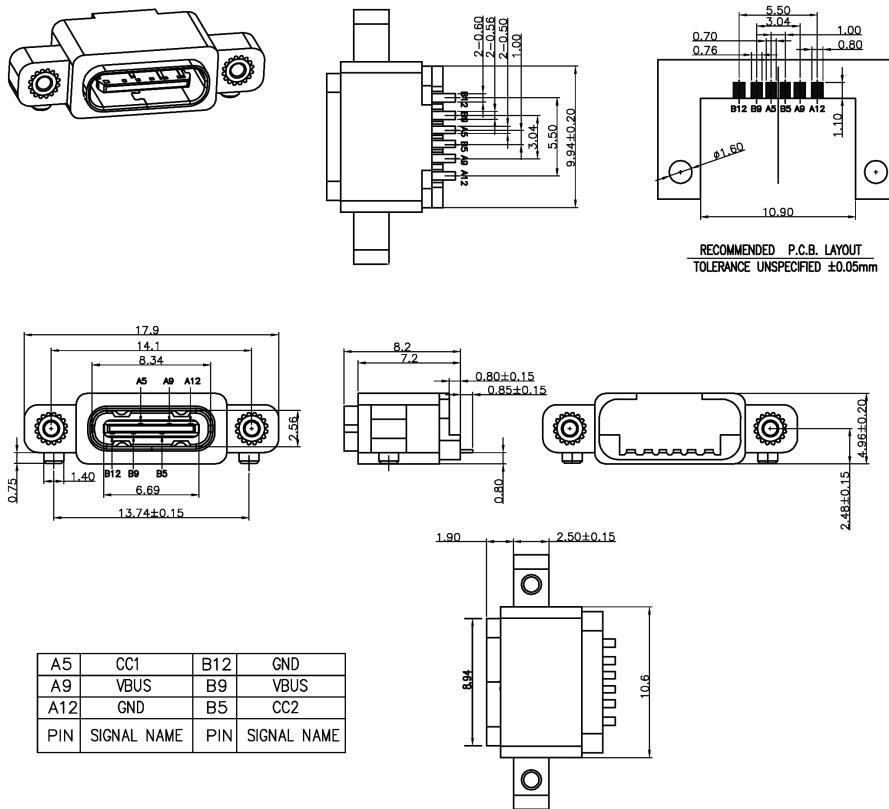

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2020 - 2024

guest /05/27/2024 2:34:55 PM CLONED FROM JACK-USBC-24SMT-THSS

<p>GlobTek, Inc.  <a href="http://www.globtek.com">www.globtek.com</a>  186 Veterans Drive,  Northvale, NJ 07647  Tel. (201) 784-1000  Fax (201) 784-0111</p>	<p>Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , , Input Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con</p> <p>Model No. <a href="#">Connector</a></p> <p>Part No./Ordering No. <a href="#">JACK-USBC-6SMT-2SL</a></p>	<p>Rev A1</p>
---	--	---------------

NOTES:

SPECIFICATION:

CURRENT RATING: 3.0A MAX.


1. VOLTAGE: 100VAC
2. TEMPERATURE RANGE: -30°C – 85°C
3. CONTACT RESISTANCE: 40 MILLIONHM MAX
4. INSULATION RESISTANCE : 100MEGOHMS MIN.
5. INSERTION FORCE: 5N – 20N
6. UNMATING FORCE: 8N – 20N
7. DURABILITY: 10,000CYCLES
8. WATER PROOFNESS: THIS PRODUCTS BASED ON IPX7
9. 6 PIN ONLY FOR PD FUNCTION, NO DATA

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2020 - 2024

guest /05/27/2024 2:34:55 PM CLONED FROM JACK-USBC-24SMT-THSS

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , Input Rating: , , Output Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con Model No. <a href="#">Connector</a>
	Part No./Ordering No. <a href="#">JACK-USBC-6SMT-2SL</a> Rev A1

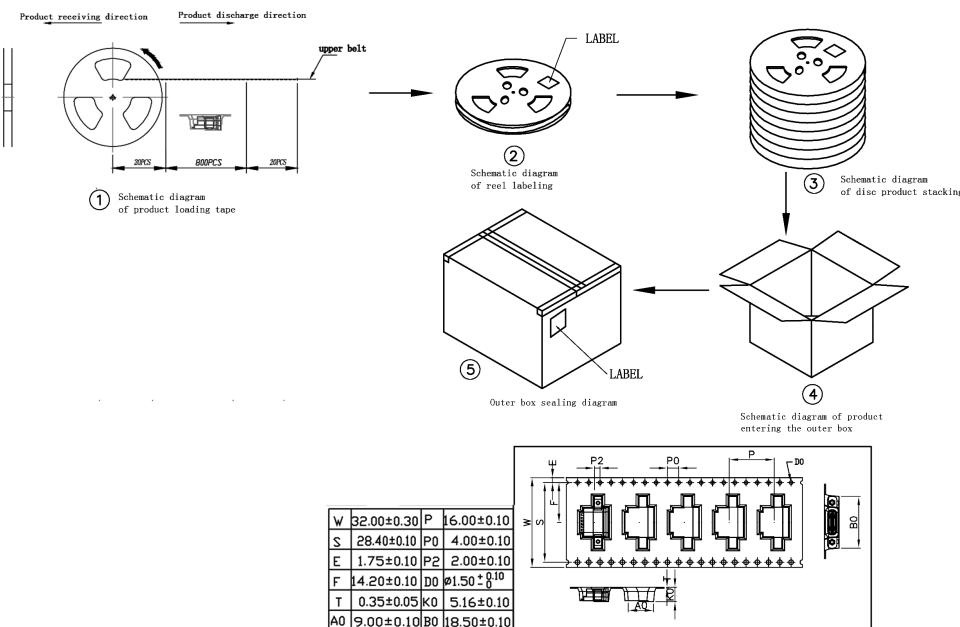

W	32.00±0.30	P	16.00±0.10
S	28.40±0.10	P0	4.00±0.10
E	1.75±0.10	P2	2.00±0.10
F	14.20±0.10	D0	Ø1.50±0.10
T	0.35±0.05	K0	5.16±0.10
A0	9.00±0.10	B0	18.50±0.10

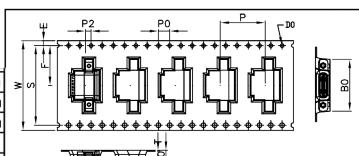

ITEM	DESC.	MATERIAL	C TYPE	7200
1	Finished product			
2	CARRIER TAPE	PET	W=24mm T=0.35mm	
3	COVER TAPE	PET	W=13.3mm T=0.05mm	
4	Small labels		L102mm*W59mm	9
5	Reel	PS	Ø330mm*W28.5mm	9
7	Outer label	A=A	L102mm*W102mm	1
9	Outer box	A=A	L330mm*W330mm*320mm	1
ITEM	DESC.	MATERIAL	REMARKS	QTY

NOTE:

#### PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2020 - 2024

guest /05/27/2024 2:34:55 PM CLONED FROM JACK-USBC-24SMT-THSS

GlobTek, Inc. <a href="http://www.globtek.com">www.globtek.com</a> 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , , Input Rating: , , Output Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con Model No. <a href="#">Connector</a> Part No./Ordering No. <a href="#">JACK-USBC-6SMT-2SL</a>	Rev A1
--	--	--------

1. QUANTITY/REEL: 800 PCS

QUANTITY/INNER CARTON: 7200 PCS

2. FREE 20 CAVE IN THE FRONT CARRIER AND FREE 20 CAVE IN THE END CARRIER

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2020 - 2024

guest /05/27/2024 2:34:55 PM CLONED FROM JACK-USBC-24SMT-THSS

GlobTek, Inc. www.globtek.com 186 Veterans Drive, Northvale, NJ 07647 Tel. (201) 784-1000 Fax (201) 784-0111	Drawing Title: Connector, , Efficiency Level: , Case Color/Style: GlobTek Black, , , Input Rating: W, 0.00V@0.00A, Output Configuration: mm, / Cond, , , Ferrite: , , GT Cord #: , Pin Out: , Blades/Input Cord: , Approvals: to , GT Cable #: / Con Model No. <a href="#">Connector</a>
Part No./Ordering No. <a href="#">JACK-USBC-6SMT-2SL</a>	Rev A1

## PACKAGING

### Packing Spec P/N:

Box Qty:	7200
Gift Box Size (mm):	
Gift Box Color:	White
Master Carton Size (mm):	330 x 330 x 320
Master Carton Cubic Volume (m <sup>3</sup> ):	0.03
Master GW (Kg):	kg
wt Ea. (Kg):	kg
wt Ea. (Kg):	kg

LABEL SPECS: ,

PACK SPEC:

### PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC. © GlobTek, Inc. 2020 - 2024

guest /05/27/2024 2:34:55 PM CLONED FROM JACK-USBC-24SMT-THSS