

1415898-5  ACTIVE

SCHRACK | SCHRACK Power PCB Relay RT Inrush Power


TE Internal #: 1415898-5

Power Relays, Standard, Bistable, 2 Coils, Polarized, Latching, 600 mW Coil Power Rating DC, SCHRACK Power PCB Relay RT Inrush Power

[View on TE.com >](#)



Relays & Contactors > Relays > Power Relays > PCB Power Relay: 16 Amp, Inrush

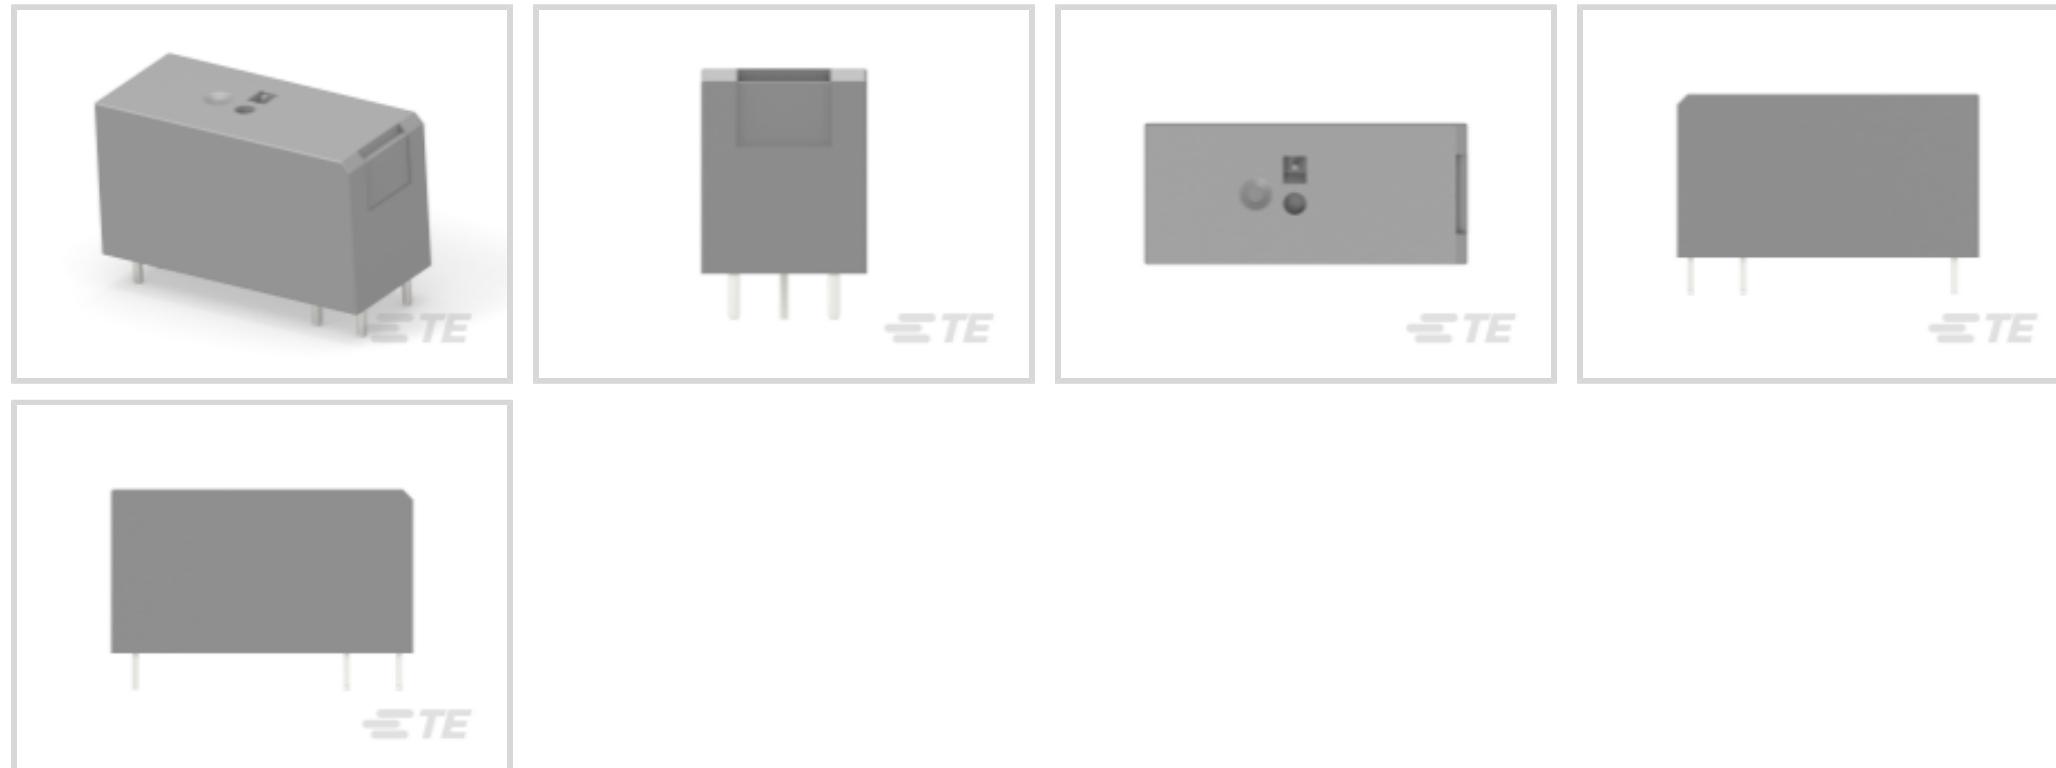

Relay Type: **Standard**

Coil Magnetic System: **Bistable, 2 Coils, Polarized, Latching**

Coil Power Rating DC: **600 mW**

Coil Resistance: **240 Ω**

Coil Special Features: **UL Coil Insulation Class F**

[All PCB Power Relay: 16 Amp, Inrush \(17\)](#)

## Features

### Product Type Features

Relay Type	Standard
------------	----------

### Configuration Features

Insulation Special Features	Tracking Index of Relay Base PTI250V
-----------------------------	--------------------------------------

Contact Special Features	W Pre-Make Contact
--------------------------	--------------------

Coil Special Features	UL Coil Insulation Class F
-----------------------	----------------------------

Contact Arrangement	1 Form A (NO)
---------------------	---------------

Contact Number of Poles	1
-------------------------	---

### Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	1250 Vrms
---	-----------

Contact Limiting Making Current	165 A
---------------------------------	-------

Contact Limiting Continuous Current	16 A
-------------------------------------	------

Insulation Initial Dielectric Between Contacts & Coil	5000 Vrms
---	-----------

Contact Limiting Breaking Current	16 A
Coil Power Rating DC	600 mW
Coil Resistance	240 Ω
Coil Voltage Rating	12 VDC
Contact Current Rating	16 A
Contact Switching Voltage (Max)	400 VAC
Contact Voltage Rating	250 VAC

#### Body Features

Product Weight	14 g [.494 oz]
----------------	----------------

#### Contact Features

Contact Material	W + AgSnO2
------------------	------------

#### Termination Features

Relay Connection Type	PCB Termination
Terminal Configuration	Solder Pins

#### Mechanical Attachment

Product Mount Type	Printed Circuit Board
--------------------	-----------------------

#### Dimensions

Insulation Clearance Between Contact & Coil	10 mm [.394 in]
Insulation Creepage Between Contact & Coil	10 mm [.394 in]
Product Width	12.7 mm [.5 in]
Product Length	29 mm [1.14 in]
Product Height	15.7 mm [.618 in]

#### Usage Conditions

Environmental Ambient Temperature (Max)	85 °C [185 °F]
---	----------------

#### Operation/Application

Solder Process	Wave Solder
Coil Magnetic System	Bistable, 2 Coils, Polarized, Latching

#### Packaging Features

Packaging Method	Carton, Tube
------------------	--------------

#### Other

Length Class (Mechanical)	25 - 30 mm
---------------------------	------------

Insulation Initial Dielectric Between Coil & Contact Class	4000 - 5000 V
Insulation Creepage Class	8 mm
Insulation Clearance Class	8 mm
Height Class (Mechanical)	15 - 16 mm
Coil Power Rating Class	500 - 600 mW
Width Class (Mechanical)	12 - 16 mm
Contact Current Class	16 A

## Product Compliance

For compliance documentation, visit the product page on [TE.com](https://www.te.com/compliance)>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C


### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts

TE Part # 9-1415898-1  
RTSETF12

## Also in the Series | [SCHRACK Power PCB Relay RT Inrush Power](#)

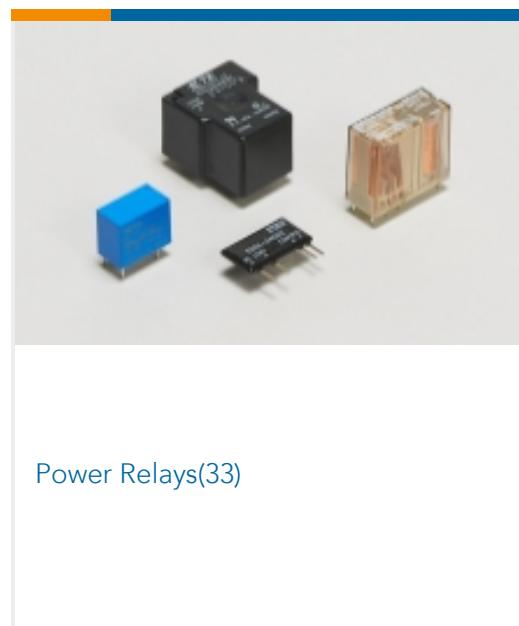

Power Relays(33)

## Customers Also Bought

TE Part # 2213730-1  
LIGHT CONTROLLER BASE  
ASSEMBLY, 76MM DIATE Part # 1415898  
PCB Power Relay: 16 Amp, InrushTE Part # NB16104001  
RT-375-3/8-X-SPTE Part # 60940-1  
.058 PIN REC 24-20 010PTPPHBZTE Part # 2176330-9  
CRGP 2010 47R 1%TE Part # 2102772-1  
DC, 7Row, Half Left End, MULTIGIG  
RT 2RTE Part # 2302785-1  
RA PLUG ASSY,7ROW,CENTER,VPX,  
MG RT3TE Part # 2359309-1  
CAGE ASSEMBLY, QSFP28 1X1  
THERMAL BRIDGE

## Documents

### CAD Files

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1415898-5\\_E.3d\\_igs.zip](#)

English

#### Customer View Model

[ENG\\_CVM\\_CVM\\_1415898-5\\_E.3d\\_stp.zip](#)

English

**Customer View Model**[ENG\\_CVM\\_CVM\\_1415898-5\\_E.2d\\_dxf.zip](#)

English

[3D PDF](#)

3D

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.**Datasheets & Catalog Pages**[Power PCB Relay RT Inrush Power](#)

English

**Product Specifications**[Definitions General Purpose Relays](#)

English

**Agency Approvals**[VDE Certificate](#)

English