



Relays & Contactors > Relays > Signal Relays > Signal Relays: 5 Amp, Monostable DC



Contact Voltage Rating: 150 VDC

Coil Power Rating DC: 727 mW

Product Mount Type: Socket

Coil Voltage Rating: 48 VDC

[All Signal Relays: 5 Amp, Monostable DC \(1\)](#)

Features

Configuration Features

Contact Special Features	Single Contact
Contact Arrangement	1 Form C (CO)
Contact Number of Poles	4

Electrical Characteristics

Insulation Initial Dielectric Between Open Contacts	500 Vrms
Contact Limiting Making Current	2 A
Contact Limiting Short-Time Current	2 A
Contact Limiting Continuous Current	2 A
Insulation Initial Dielectric Between Adjacent Contacts	500 Vrms
Insulation Initial Dielectric Between Contacts & Coil	1000 Vrms
Insulation Initial Resistance	1000 MΩ
Power Consumption	800 mW
Input Voltage	125 VAC
Contact Limiting Breaking Current	2 A
Coil Resistance	3200 Ω
Contact Voltage Rating	150 VDC
Coil Power Rating DC	727 mW
Coil Voltage Rating	48 VDC



Contact Current Rating	1.25 A
Contact Switching Voltage (Max)	150 VDC
Body Features	
Product Weight	25 g[.883 oz]
Contact Features	
Contact Plating Material	Gold
Contact Material	Nickel-Palladium
Termination Features	
Relay Connection Type	Plug-In
Mechanical Attachment	
Product Mounting Feature Type	Mounting Studs
Product Mount Type	Socket
Dimensions	
Product Width	19 mm[.748 in]
Product Length	30 mm[1.18 in]
Product Height	30 mm[1.18 in]
Usage Conditions	
Environmental Ambient Temperature (Max)	70 °C[158 °F]
Operating Temperature Range	-40 - 70 °C
Operation/Application	
Actuating System	AC, DC
Performance Type	Standard
Coil Magnetic System	Monostable, DC
Packaging Features	
Packaging Method	Box & Carton
Other	
Length Class (Mechanical)	25 - 30 mm
Environmental Ambient Temperature Class	50 - 70 °C
Height Class (Mechanical)	25 - 30 mm
Coil Power Rating Class	600 - 800 mW
Width Class (Mechanical)	16 - 20 mm



Contact Current Class

0 - 2 A

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




Also in the Series | [Axicom Cradle Relay N](#)

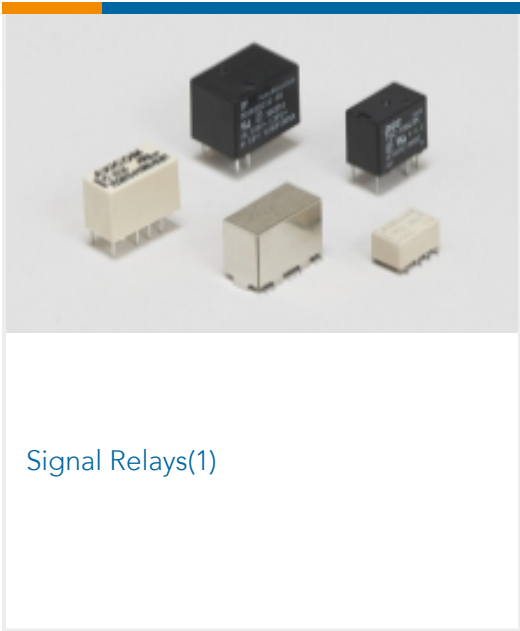

Signal Relays(1)

Customers Also Bought

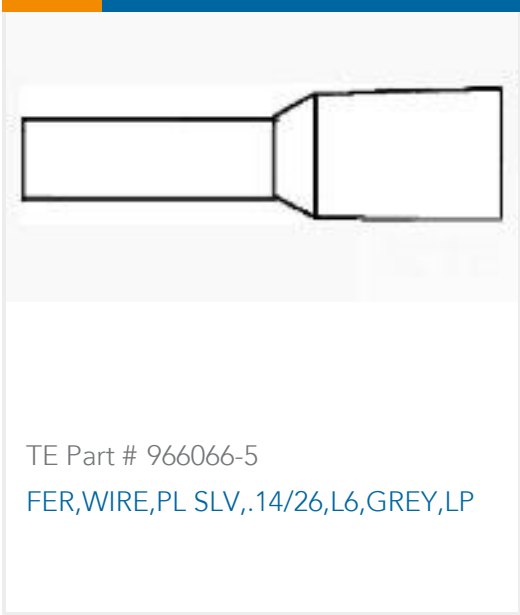

TE Part # 966066-5
FER,WIRE,PL SLV,,14/26,L6,GREY,LP




TE Part # 1-2176078-2
EP 1W 680R 5%



TE Part # CH7225-005
MXSE-3131



TE Part # 2-1393809-4
Signal Relays: 5 Amp, Monostable DC

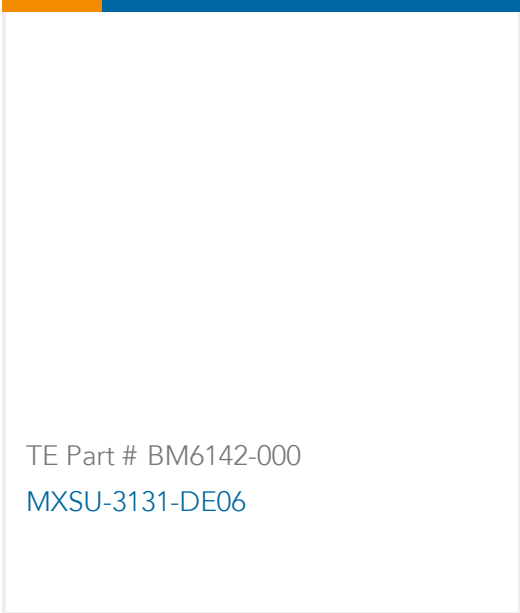

TE Part # BM6142-000
MXSU-3131-DE06



TE Part # CM5887-000
EPKJ-36B/1XU-3SB-DE01



TE Part # C80178-000
VSMI-290-3D02/25-5X2-16



TE Part # A08773-000
VSMI-290-3D02/25-5X2-8

Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_3-1393809-2_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_3-1393809-2_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_3-1393809-2_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Product Specification

English



Definitions General Purpose Relays

English