

2-338556-1

✓ ACTIVE


Alcoswitch SE

TE Internal #: 2-338556-1

RJ45 Connectors, RJ45, Single Port, 1 x 1, RJ Type Jacks & Plugs, Standard Connector Contact Density, Jack, Shielded, Cat 3, Alcoswitch SE

[View on TE.com >](#)

Connectors > Modular Jacks & Plugs > RJ45 Connectors

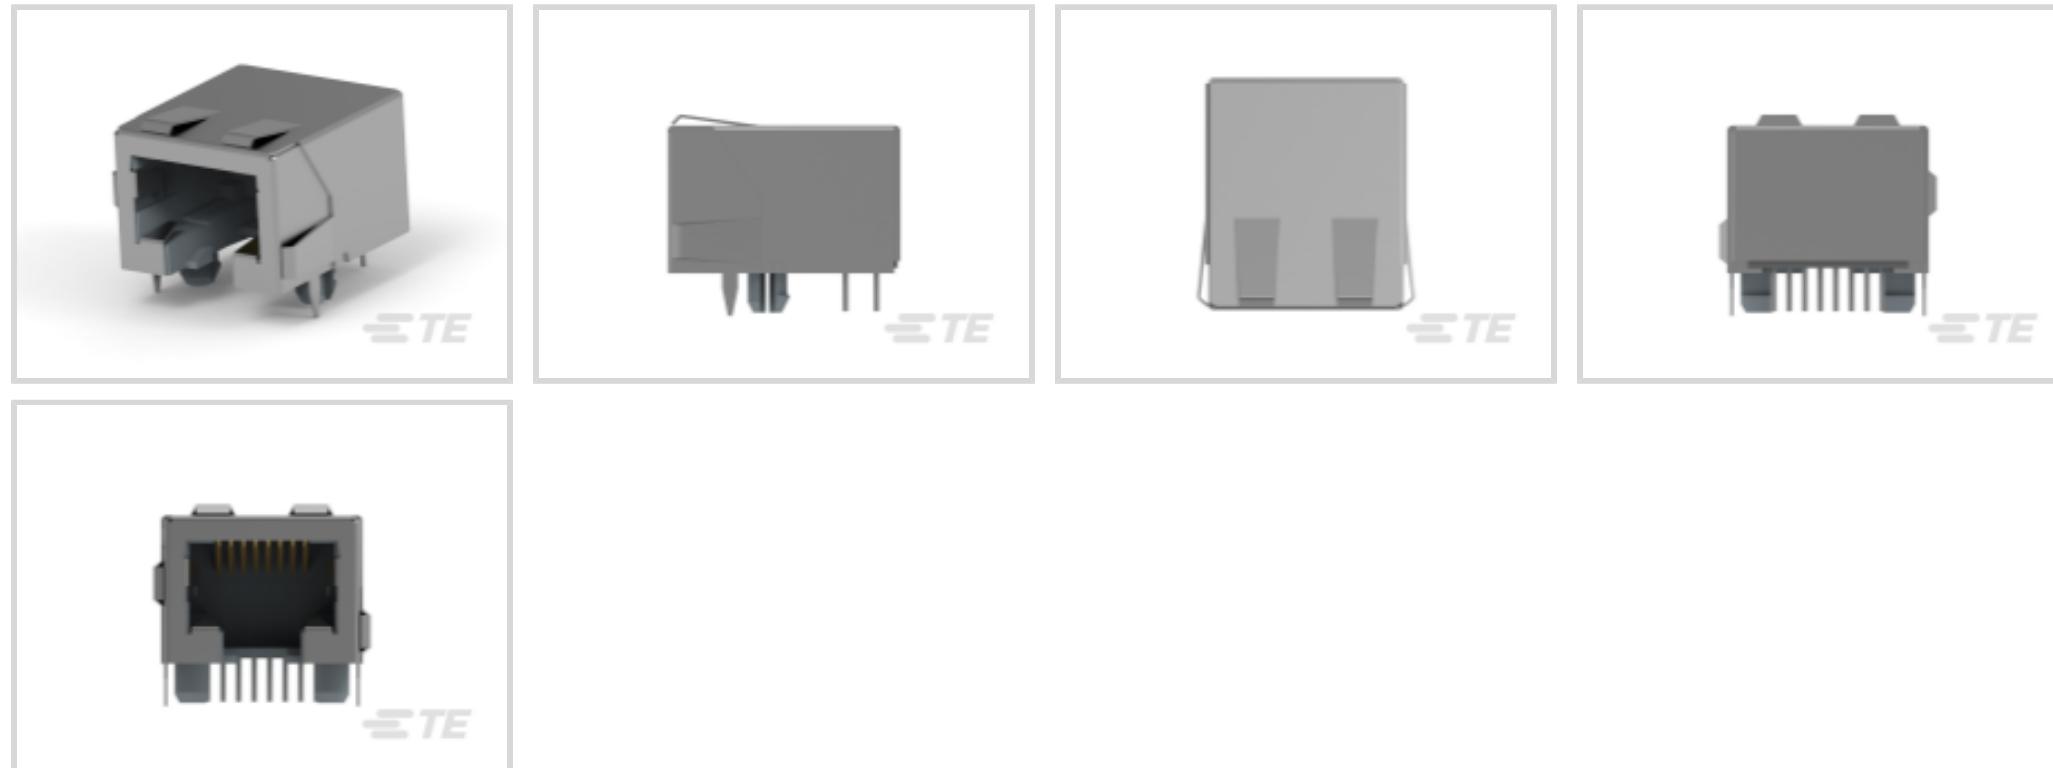Modular Jack & Plug Interface Type: **RJ45**Port Configuration: **Single Port**Port Matrix Configuration: **1 x 1**Modular Jacks & Plugs Products: **RJ Type Jacks & Plugs**Connector Contact Density: **Standard**

Features

Product Type Features

Connector Product Type	Connector Assembly
Modular Jack & Plug Interface Type	RJ45
Modular Jacks & Plugs Products	RJ Type Jacks & Plugs
Modular Connector Style	Jack
Grounding Options	PCB and Panel Ground
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Panel Ground Location	Top and Side, Top
Number of PCB Ground Tabs	2
Port Configuration	Single Port
Port Matrix Configuration	1 x 1
Connector Contact Density	Standard
Number of Positions	8
Number of Loaded Positions	8

PCB Mount Orientation

Right Angle

Body Features

PCB Ground Tab Location	3.05 mm[.12 in]
Shield Plating Material	Tin
Shield Material	Brass
Modular Jack Latch Orientation	Standard - Latch Down
Connector Profile	Low

Contact Features

PCB Contact Termination Area Plating Material	Tin
Contact Current Rating (Max)	1.5 A
Contact Mating Area Plating Material	Nickel
Contact Base Material	Phosphor Bronze
Contact Mating Area Plating Material Thickness	1.27 μ m[50 μ in]

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder
Termination Post & Tail Length	3.1 mm[.122 in]

Mechanical Attachment

Panel Mount Feature	Without
Connector Mounting Type	Board Mount

Housing Features

Mating Entry Location	Side
Centerline (Pitch)	1.02 mm[.04 in]
Housing Color	Black
Housing Material	PBT GF

Dimensions

PCB Thickness (Recommended)	1.6 mm[.062 in]
Connector Height	12.1 mm[.475 in]

Usage Conditions

Operating Temperature Range	-45 - 70 °C[-40 - 158 °F]
-----------------------------	---------------------------

Operation/Application

Indicator Type	Not Illuminated
Shielded	Yes

Circuit Application

Signal

Industry Standards

UL Flammability Rating

UL 94V-0

Performance Category

Cat 3

Packaging Features

Packaging Quantity

190

Packaging Method

Box & Tray, Tray

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU

Compliant

EU ELV Directive 2000/53/EC

Compliant

China RoHS 2 Directive MIIT Order No 32, 2016

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006

Current ECHA Candidate List: JAN 2024
(240)Candidate List Declared Against: JAN 2024
(240)

Does not contain REACH SVHC

Halogen Content

Not Low Halogen - contains Br or Cl > 900
ppm.


Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer



This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

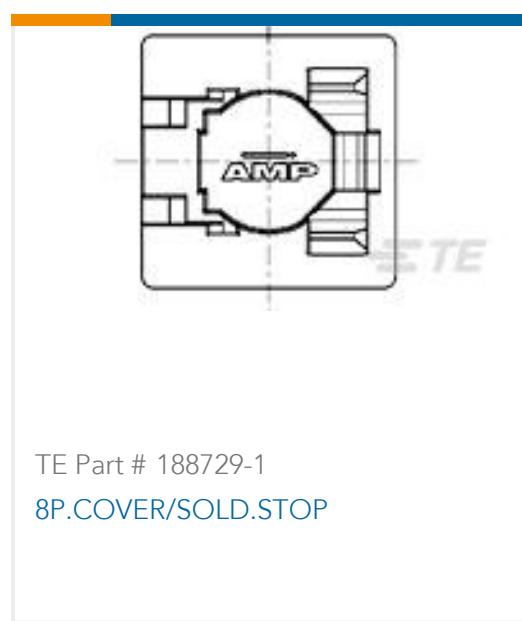
TE Part # 188729-1
8P.COVER/SOLD.STOP

Also in the Series


Alcoswitch SE

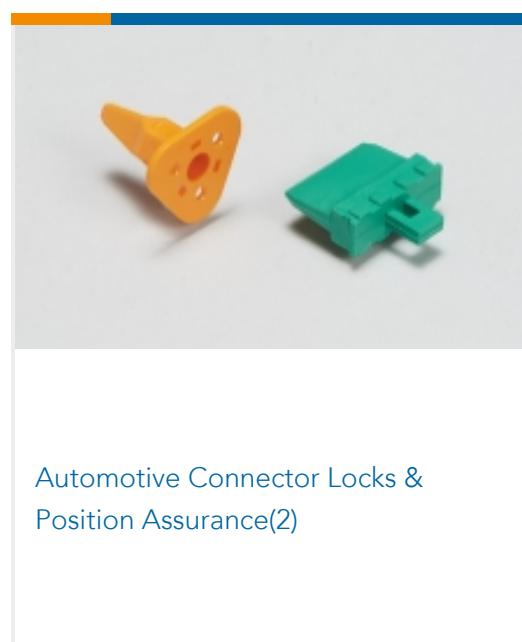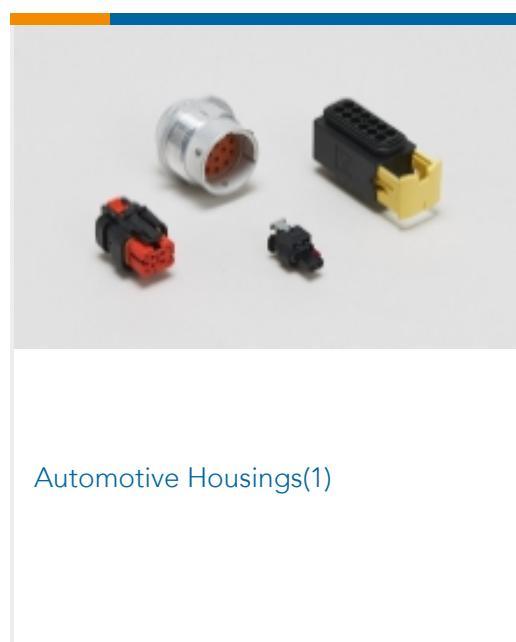Automotive Connector Locks &
Position Assurance(2)


Automotive Housings(1)

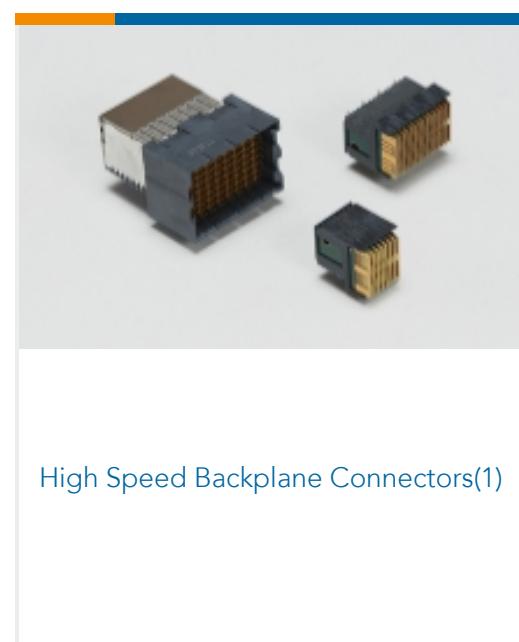


High Speed Backplane Connectors(1)

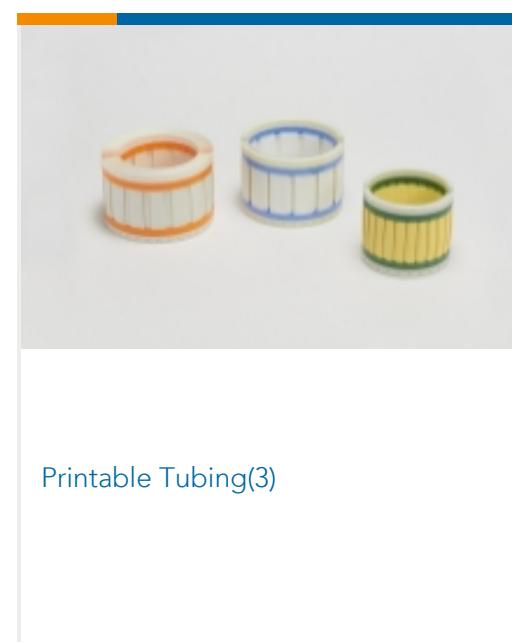


Printable Tubing(3)

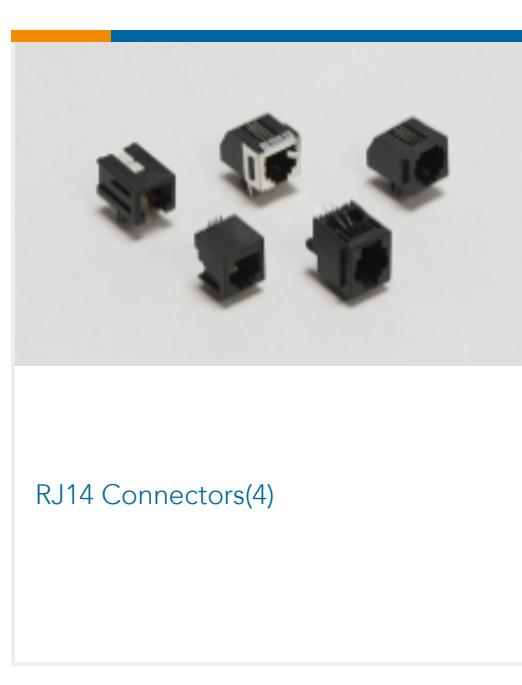


RJ14 Connectors(4)

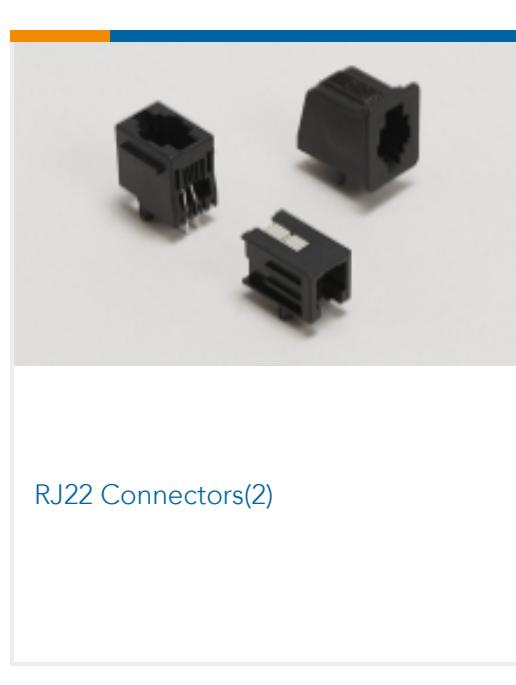


RJ22 Connectors(2)

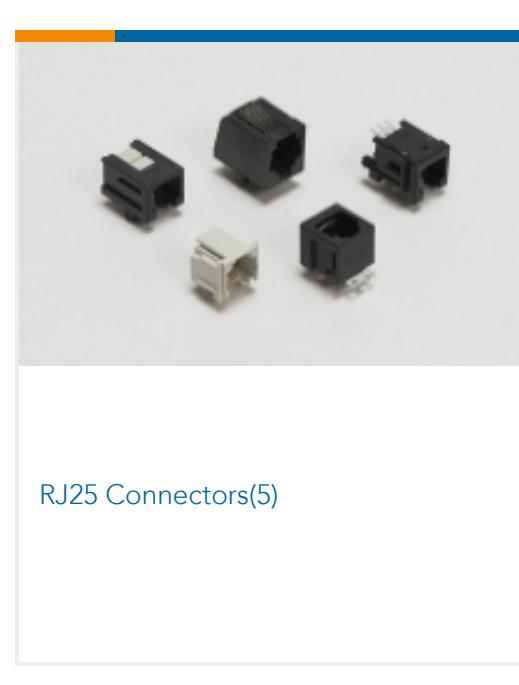

RJ25 Connectors(5)

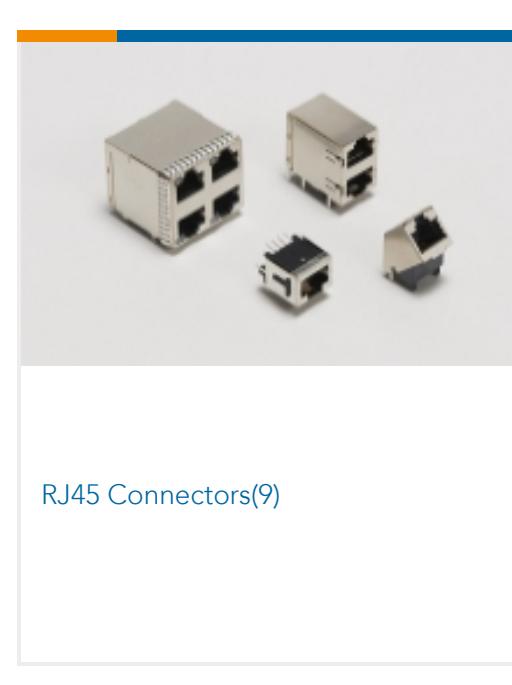


RJ45 Connectors(9)

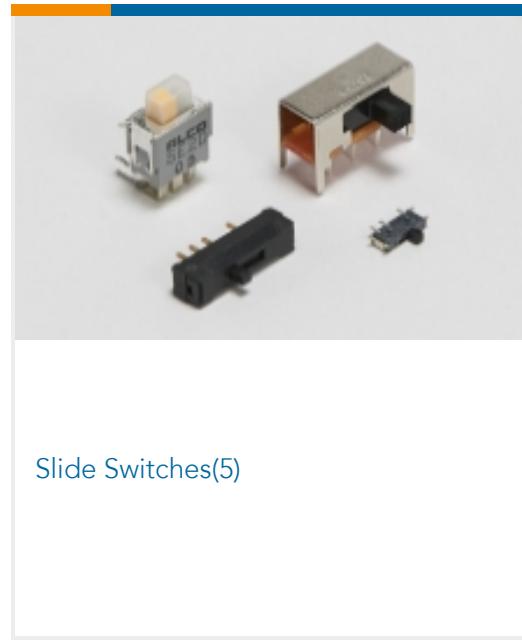

Slide Switches(5)

Customers Also Bought

TE Part # 1-1462039-8
IM06DGR=IM RELAY 140mW 12VTE Part # 350550-7
UMNL SOK 20-14 AU/BR L/PTE Part # 50845-2
TERMINAL,PIDG PTFE R 12-10 10TE Part # 60619-1
CMNL SOK PTPBR L/P

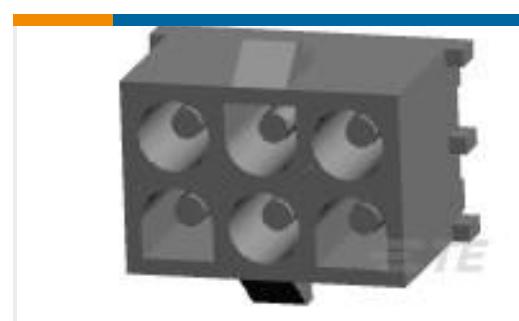TE Part # 3-5353652-6
.5FHP08H,440,B,GIG,08/Sn,HT,NSYesTE Part # 350431-1
06P UMNL PIN HDR ASSY V2 NATTE Part # 4-1879208-6
CPF 0402 750R 0.1% 25PPM 1K RLTE Part # 1761465-4
PCI Express RA assy 5.8mm slot 2.3 mm pcTE Part # 5536507-4
2MM FB,ASY,192,SIG,REC,SL,2.73TE Part # 2411069-2
RF CA,UMCC GEN4,1.13MM,L100MM
PIGTAIL

Documents

Product Drawings

8/8 MOD JACK ASSY SE

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2-338556-1_G.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-338556-1_G.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-338556-1_G.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

side entry, bottom entry, top entry and toolless modular jack

English

Product Specification

English