

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Protective conductor double-level terminal block, Current and voltage are determined by the plug used., connection method: Screw/plug-in connection, cross section: 0.14 mm² - 4 mm², mounting type: NS 35/7,5, NS 35/15, color: green-yellow

Your advantages

- Potential routing on two levels

Commercial data

Item number	3060380
Packing unit	50 pc
Minimum order quantity	50 pc
Sales key	BE01
Product key	BE1142
Catalog page	Page 303 (C-1-2019)
GTIN	4046356132190
Weight per piece (including packing)	19.252 g
Weight per piece (excluding packing)	18.421 g
Customs tariff number	85369010
Country of origin	PL

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

Technical data

Notes

General	Current and voltage are determined by the plug used.
General	
Note	When establishing a connection on the open housing side of a feed-through modular terminal block of the same series and size, the block must be provided with a cover if the expected insulation voltage is >320 V.

Product properties

Product type	Ground terminal block
Number of positions	1
Number of connections	4
Number of rows	2

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated insulation voltage	500 V
Rated surge voltage	6 kV
Maximum power dissipation for nominal condition	0.77 W

Connection data

Grounding foot	Yes
Number of connections per level	2
Nominal cross section	2.5 mm ²

Level 1+2

Screw thread	M3
Note	Please observe the current carrying capacity of the DIN rails.
Tightening torque	0.5 ... 0.6 Nm
Stripping length	9 mm
Internal cylindrical gage	A3
Connection in acc. with standard	IEC 61984
Conductor cross section rigid	0.14 mm ² ... 4 mm ²
Cross section AWG	26 ... 12 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm ² ... 4 mm ²
Conductor cross section, flexible [AWG]	26 ... 12 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm ² ... 2.5 mm ²
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm ² ... 2.5 mm ²

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

2 conductors with same cross section, solid	0.14 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible	0.14 mm ² ... 1.5 mm ²
2 conductors with same cross section, flexible, with ferrule without plastic sleeve	0.14 mm ² ... 1.5 mm ²
2 conductors with the same cross section, flexible, with TWIN ferrule with plastic sleeve	0.5 mm ²

Dimensions

Width	5.2 mm
End cover width	2.2 mm
Height	69.9 mm
Depth	64.4 mm
Depth on NS 35/7,5	65 mm
Depth on NS 35/15	72.5 mm

Material specifications

Color	green-yellow
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Mechanical properties

Mechanical data

Open side panel	Yes
-----------------	-----

Environmental and real-life conditions

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Service life test category 1, class B, body mounted
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz
ASD level	0.964 (m/s ²) ² /Hz
Acceleration	0.58g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

Result	Test passed
Shocks	
Specification	DIN EN 50155 (VDE 0115-200):2022-06
Pulse shape	Half-sine
Acceleration	5g
Shock duration	30 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

Ambient conditions

Ambient temperature (operation)	-60 °C (max. operating temperature see derating curve)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, no longer than 24 h, -60°C to +70°C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 61984
----------------------------------	-----------

Mounting

Mounting type	NS 35/7,5
	NS 35/15

UTT 2,5/2P-PE - Protective conductor double-level terminal block




3060380

<https://www.phoenixcontact.com/us/products/3060380>

Drawings

Circuit diagram

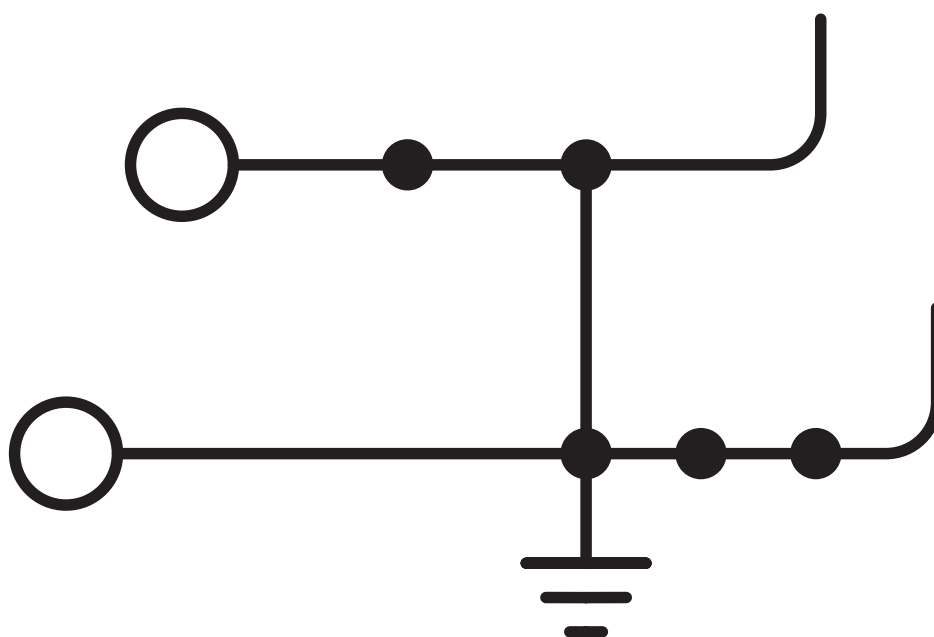

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3060380>

**EAC**
Approval ID: RU C-DE.BL08.B.00534

 cULus Recognized Approval ID: E60425	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	-	-	26 - 12	-
Multi-conductor connection	-	-	26 - 16	-
Use group C				
	-	-	26 - 12	-
Multi-conductor connection	-	-	26 - 16	-
Use group D				
	-	-	26 - 12	-
Multi-conductor connection	-	-	26 - 16	-

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380
<https://www.phoenixcontact.com/us/products/3060380>

Classifications

ECLASS

ECLASS-11.0	27141151
ECLASS-12.0	27141151
ECLASS-13.0	27250306

ETIM

ETIM 9.0	EC002021
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

3060380
<https://www.phoenixcontact.com/us/products/3060380>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	8e899075-b6c1-481b-ba6b-f0108b8c47bd

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

Accessories



Note: Applying some accessories below might limit this product.

FBS 2-5 - Plug-in bridge

3030161

<https://www.phoenixcontact.com/us/products/3030161>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, length: 23 mm, color: red

FBS 3-5 - Plug-in bridge

3030174

<https://www.phoenixcontact.com/us/products/3030174>



Plug-in bridge, pitch: 5.2 mm, number of positions: 3, length: 23 mm, color: red

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 4-5 - Plug-in bridge

3030187

<https://www.phoenixcontact.com/us/products/3030187>



Plug-in bridge, pitch: 5.2 mm, number of positions: 4, length: 23 mm, color: red

FBS 5-5 - Plug-in bridge

3030190

<https://www.phoenixcontact.com/us/products/3030190>



Plug-in bridge, pitch: 5.2 mm, number of positions: 5, length: 23 mm, color: red

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 10-5 - Plug-in bridge

3030213

<https://www.phoenixcontact.com/us/products/3030213>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, length: 23 mm, color: red



FBS 20-5 - Plug-in bridge

3030226

<https://www.phoenixcontact.com/us/products/3030226>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: red



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 50-5 - Plug-in bridge

3038930

<https://www.phoenixcontact.com/us/products/3038930>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: red

FBSR 2-5 - Plug-in bridge

3033702

<https://www.phoenixcontact.com/us/products/3033702>



Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: red

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBSR 3-5 - Plug-in bridge

3001591

<https://www.phoenixcontact.com/us/products/3001591>

Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: red



FBSR 4-5 - Plug-in bridge

3001592

<https://www.phoenixcontact.com/us/products/3001592>

Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: red



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBSR 5-5 - Plug-in bridge

3001593

<https://www.phoenixcontact.com/us/products/3001593>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: red



FBSR 10-5 - Plug-in bridge

3033710

<https://www.phoenixcontact.com/us/products/3033710>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: red



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 2-5 BU - Plug-in bridge

3036877

<https://www.phoenixcontact.com/us/products/3036877>

Plug-in bridge, pitch: 5.2 mm, number of positions: 2, color: blue



FBS 3-5 BU - Plug-in bridge

3036880

<https://www.phoenixcontact.com/us/products/3036880>

Plug-in bridge, pitch: 5.2 mm, number of positions: 3, color: blue



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 4-5 BU - Plug-in bridge

3036893

<https://www.phoenixcontact.com/us/products/3036893>

Plug-in bridge, pitch: 5.2 mm, number of positions: 4, color: blue



FBS 5-5 BU - Plug-in bridge

3036903

<https://www.phoenixcontact.com/us/products/3036903>

Plug-in bridge, pitch: 5.2 mm, number of positions: 5, color: blue



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 10-5 BU - Plug-in bridge

3036916

<https://www.phoenixcontact.com/us/products/3036916>

Plug-in bridge, pitch: 5.2 mm, number of positions: 10, color: blue



 Max. current carrying capacity: 24 A

FBS 20-5 BU - Plug-in bridge

3036929

<https://www.phoenixcontact.com/us/products/3036929>

Plug-in bridge, pitch: 5.2 mm, number of positions: 20, color: blue



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

FBS 50-5 BU - Plug-in bridge

3032114

<https://www.phoenixcontact.com/us/products/3032114>



Plug-in bridge, pitch: 5.2 mm, number of positions: 50, color: blue

D-UTTB 2,5/4 2P - End cover

3060393

<https://www.phoenixcontact.com/us/products/3060393>



End cover, depth: 66 mm, width: 2.2 mm, height: 74.3 mm, color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

DP-UTTB 2,5/4 - Spacer plate

3047303

<https://www.phoenixcontact.com/us/products/3047303>

Spacer plate, depth: 33 mm, width: 2.6 mm, height: 69.9 mm, color: gray



ATP-UTTB 2,5/4 - Partition plate

3047316

<https://www.phoenixcontact.com/us/products/3047316>

Partition plate, depth: 70 mm, width: 2.2 mm, height: 74.3 mm, color: gray



UTT2B 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

PC - Coding star

3040588

<https://www.phoenixcontact.com/us/products/3040588>



Coding star, 4-section, depth: 6 mm, width: 3 mm, height: 3 mm, color: red

LPO 2,5/E - Pick-off plug

3270516

<https://www.phoenixcontact.com/us/products/3270516>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

LPO 2,5 - Pick-off plug

3270517

<https://www.phoenixcontact.com/us/products/3270517>



Pick-off plug, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

LPS-5/E - Service connector

3270520

<https://www.phoenixcontact.com/us/products/3270520>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

LPS-5 - Service connector

3270521

<https://www.phoenixcontact.com/us/products/3270521>



Service connector, nom. voltage: 800 V, nominal current: 24 A, number of positions: 1, connection method: Push-in connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: red

NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, Pack of 25 (50 m), acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/15 PERF 2000MM - DIN rail perforated

1201730

<https://www.phoenixcontact.com/us/products/1201730>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

NS 35/15 UNPERF 2000MM - DIN rail, unperforated

1201714

<https://www.phoenixcontact.com/us/products/1201714>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/15 WH PERF 2000MM - DIN rail perforated

0806602

<https://www.phoenixcontact.com/us/products/0806602>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: white

NS 35/15 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204135

<https://www.phoenixcontact.com/us/products/1204135>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/15 AL UNPERF 2000MM - DIN rail, unperforated

1201756

<https://www.phoenixcontact.com/us/products/1201756>



DIN rail, unperforated, similar to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver

NS 35/15 ZN PERF 2000MM - DIN rail perforated

1206599

<https://www.phoenixcontact.com/us/products/1206599>



DIN rail perforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/15 ZN UNPERF 2000MM - DIN rail, unperforated

1206586

<https://www.phoenixcontact.com/us/products/1206586>



DIN rail, unperforated, Pack of 25 (50 m), similar to EN 60715, material: Steel, galvanized, Standard profile, color: silver

NS 35/15 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201895

<https://www.phoenixcontact.com/us/products/1201895>



DIN rail, unperforated, Pack of 10 (20 m), similar to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

NS 35/15 CAP - End cap

1206573

<https://www.phoenixcontact.com/us/products/1206573>

DIN rail end piece, for DIN rail NS 35/15



NS 35/15-2,3 UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1201798

<https://www.phoenixcontact.com/us/products/1201798>



DIN rail, unperforated, Pack of 10 (20 m), acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile 2.3 mm, color: silver

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

ZB 5 :UNBEDRUCKT - Zack marker strip

1050004

<https://www.phoenixcontact.com/us/products/1050004>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.1 x 10.5 mm, Number of individual labels: 10

ZB 5 CUS - Zack marker strip

0824962

<https://www.phoenixcontact.com/us/products/0824962>



Zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

UTT2B 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

ZB 5,LGS:FORTL.ZAHLEN - Zack marker strip

1050017

<https://www.phoenixcontact.com/us/products/1050017>



Zack marker strip, Strip, white, labeled, printed horizontally: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,QR:FORTL.ZAHLEN - Zack marker strip

1050020

<https://www.phoenixcontact.com/us/products/1050020>



Zack marker strip, white, Printed vertically: consecutive numbers 1 ... 10, 11 ... 20, etc. up to 491 ... 500, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

ZB 5,LGS:GLEICHE ZAHLEN - Zack marker strip

1050033

<https://www.phoenixcontact.com/us/products/1050033>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, printed horizontally: Identical numbers 1 or 2, etc. up to 100, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

ZB 5,LGS:L1-N,PE - Zack marker strip

1050415

<https://www.phoenixcontact.com/us/products/1050415>



Zack marker strip, Strip, white, labeled, horizontal: L1, L2, L3, N, PE, L1, L2, L3, N, PE, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 5.15 x 10.5 mm, Number of individual labels: 10

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UC-TM 5 - Marker for terminal blocks

0818108

<https://www.phoenixcontact.com/us/products/0818108>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 96

UC-TM 5 CUS - Marker for terminal blocks

0824581

<https://www.phoenixcontact.com/us/products/0824581>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 10.5 x 4.6 mm, Number of individual labels: 96

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UCT-TM 5 - Marker for terminal blocks

0828734

<https://www.phoenixcontact.com/us/products/0828734>



Marker for terminal blocks, Sheet, white, unlabeled, can be labeled with: TOPMARK NEO, TOPMARK LASER, BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, THERMOMARK PRIME, THERMOMARK CARD 2.0, THERMOMARK CARD, mounting type: snapped, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

UCT-TM 5 CUS - Marker for terminal blocks

0829595

<https://www.phoenixcontact.com/us/products/0829595>



Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 5.2 mm, lettering field size: 4.6 x 10.5 mm, Number of individual labels: 72

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

GBS 5-25X12 - Group marker label for terminal marking

0810588

<https://www.phoenixcontact.com/us/products/0810588>



Group marker label, snaps onto terminal center for screw, spring-cage and quick connection terminal blocks, labeled with a 25 x 12 mm label or manually with the B-STIFT, in the foot part with ZB 5

GBS 5-25X5 - Group marker label for terminal marking

0829126

<https://www.phoenixcontact.com/us/products/0829126>



Group marking label, can be snapped into terminal center for screw, spring-cage, push-in, and fast connection terminal blocks, can be labeled with a 24 x 4 mm label or manually using B-STIFT, in the foot part with ZB 5

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

STP 5-2-ZB - Marker carriers

3037643

<https://www.phoenixcontact.com/us/products/3037643>



Marker carriers, snaps into ST 2,5 spring-cage terminal blocks, can be marked with UC-TM 5, UC-TMF 5, UCT-TM 5, UCT-TMF 5, ZB 5, or ZBF 5, gray, unlabeled, mounting type: snapped

MPS-MT - Test plug

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plug, with solder connection up to 1 mm² conductor cross section, number of positions: 1, color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380


<https://www.phoenixcontact.com/us/products/3060380>

MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



PAI-4-FIX-5/6 BU - Test adapter

3035975

<https://www.phoenixcontact.com/us/products/3035975>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

PAI-4-FIX-5/6 OG - Test adapter

3035974

<https://www.phoenixcontact.com/us/products/3035974>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 YE - Test adapter

3035977

<https://www.phoenixcontact.com/us/products/3035977>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

PAI-4-FIX-5/6 RD - Test adapter

3035976

<https://www.phoenixcontact.com/us/products/3035976>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 GN - Test adapter

3035978

<https://www.phoenixcontact.com/us/products/3035978>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

PAI-4-FIX-5/6 BK - Test adapter

3035980

<https://www.phoenixcontact.com/us/products/3035980>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 GY - Test adapter

3035982

<https://www.phoenixcontact.com/us/products/3035982>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

PAI-4-FIX-5/6 VT - Test adapter

3035979

<https://www.phoenixcontact.com/us/products/3035979>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PAI-4-FIX-5/6 BN - Test adapter

3035981

<https://www.phoenixcontact.com/us/products/3035981>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

PAI-4-FIX-5/6 WH - Test adapter

3035983

<https://www.phoenixcontact.com/us/products/3035983>

4 mm test adapter, for terminal blocks with 5.2 mm and 6.2 mm pitch



PS-5 - Test plug

3030983

<https://www.phoenixcontact.com/us/products/3030983>

Test plug, Modular test plug, number of positions: 1, color: red



UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

DP PS-5 - Spacer plate

3036725

<https://www.phoenixcontact.com/us/products/3036725>



Spacer plate, depth: 29 mm, width: 5.2 mm, height: 22.4 mm, number of positions: 1, color: red

PS-5/2,3MM RD - Test plug

3038723

<https://www.phoenixcontact.com/us/products/3038723>



Test plug, number of positions: 1, color: red

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

CLIPFIX 35 - End bracket

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

CLIPFIX 35-5 - End bracket

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380


<https://www.phoenixcontact.com/us/products/3060380>

E/NS 35 N - End bracket

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



SP 2,5/ 1 - Plug

3040258

<https://www.phoenixcontact.com/us/products/3040258>

Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray



UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/ 2 - Plug

3040261

<https://www.phoenixcontact.com/us/products/3040261>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

SP 2,5/ 3 - Plug

3040274

<https://www.phoenixcontact.com/us/products/3040274>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/ 4 - Plug

3040287

<https://www.phoenixcontact.com/us/products/3040287>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

SP 2,5/ 5 - Plug

3040290

<https://www.phoenixcontact.com/us/products/3040290>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/ 6 - Plug

3040300

<https://www.phoenixcontact.com/us/products/3040300>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

SP 2,5/ 7 - Plug

3040313

<https://www.phoenixcontact.com/us/products/3040313>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/ 8 - Plug

3040326

<https://www.phoenixcontact.com/us/products/3040326>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

SP 2,5/ 9 - Plug

3040339

<https://www.phoenixcontact.com/us/products/3040339>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/10 - Plug

3040342

<https://www.phoenixcontact.com/us/products/3040342>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

SP 2,5/11 - Plug

3040355

<https://www.phoenixcontact.com/us/products/3040355>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/12 - Plug

3040368

<https://www.phoenixcontact.com/us/products/3040368>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

SP 2,5/13 - Plug

3040371

<https://www.phoenixcontact.com/us/products/3040371>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/14 - Plug

3040384

<https://www.phoenixcontact.com/us/products/3040384>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

SP 2,5/15 - Plug

3040397

<https://www.phoenixcontact.com/us/products/3040397>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SP 2,5/ 1 BU - Plug

3040698

<https://www.phoenixcontact.com/us/products/3040698>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: blue

SP 2,5/ 1 GNYE - Plug

3040708

<https://www.phoenixcontact.com/us/products/3040708>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: green-yellow

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SPB 2,5/ 1 - Plug

3040106

<https://www.phoenixcontact.com/us/products/3040106>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

SPB 2,5/ 9 - Plug

3040180

<https://www.phoenixcontact.com/us/products/3040180>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm² - 4 mm², color: gray

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SPB 2,5/11 - Plug

3040203

<https://www.phoenixcontact.com/us/products/3040203>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

SPB 2,5/13 - Plug

3040229

<https://www.phoenixcontact.com/us/products/3040229>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SPB 2,5/14 - Plug

3040232

<https://www.phoenixcontact.com/us/products/3040232>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: gray

SPB 2,5/ 1 BU - Plug

3040724

<https://www.phoenixcontact.com/us/products/3040724>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: blue

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SPB 2,5/ 1 GNYE - Plug

3040711

<https://www.phoenixcontact.com/us/products/3040711>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Spring-cage connection, Rated cross section: 2.5 mm², cross section: 0.08 mm²- 4 mm², color: green-yellow

UPBV 2,5/ 1 - Plug

3045145

<https://www.phoenixcontact.com/us/products/3045145>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 2 - Plug

3045402

<https://www.phoenixcontact.com/us/products/3045402>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 2, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/ 3 - Plug

3045415

<https://www.phoenixcontact.com/us/products/3045415>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 3, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTT2B 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 4 - Plug

3045428

<https://www.phoenixcontact.com/us/products/3045428>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 4, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/ 5 - Plug

3045431

<https://www.phoenixcontact.com/us/products/3045431>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 5, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 6 - Plug

3045444

<https://www.phoenixcontact.com/us/products/3045444>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 6, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/ 7 - Plug

3045457

<https://www.phoenixcontact.com/us/products/3045457>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 7, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 8 - Plug

3045460

<https://www.phoenixcontact.com/us/products/3045460>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 8, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/ 9 - Plug

3045473

<https://www.phoenixcontact.com/us/products/3045473>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 9, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/10 - Plug

3045499

<https://www.phoenixcontact.com/us/products/3045499>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 10, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/11 - Plug

3045509

<https://www.phoenixcontact.com/us/products/3045509>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 11, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/12 - Plug

3045512

<https://www.phoenixcontact.com/us/products/3045512>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 12, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/13 - Plug

3045525

<https://www.phoenixcontact.com/us/products/3045525>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 13, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTT2B 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/14 - Plug

3045538

<https://www.phoenixcontact.com/us/products/3045538>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 14, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/15 - Plug

3045541

<https://www.phoenixcontact.com/us/products/3045541>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 15, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 1 BU - Plug

3045240

<https://www.phoenixcontact.com/us/products/3045240>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: blue

UPBV 2,5/ 1 GNYE - Plug

3045253

<https://www.phoenixcontact.com/us/products/3045253>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: green-yellow

UTT2B 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 1-L - Plug

3045318

<https://www.phoenixcontact.com/us/products/3045318>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/ 1-L BU - Plug

3045321

<https://www.phoenixcontact.com/us/products/3045321>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: blue

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 1-L GNYE - Plug

3045334

<https://www.phoenixcontact.com/us/products/3045334>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: green-yellow

UPBV 2,5/ 1-M - Plug

3045347

<https://www.phoenixcontact.com/us/products/3045347>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 1-M BU - Plug

3045350

<https://www.phoenixcontact.com/us/products/3045350>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: blue

UPBV 2,5/ 1-M GNYE - Plug

3045363

<https://www.phoenixcontact.com/us/products/3045363>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: green-yellow

UTT2B 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 1-R - Plug

3045376

<https://www.phoenixcontact.com/us/products/3045376>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: gray

UPBV 2,5/ 1-R BU - Plug

3045389

<https://www.phoenixcontact.com/us/products/3045389>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: blue

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

UPBV 2,5/ 1-R GNYE - Plug

3045392

<https://www.phoenixcontact.com/us/products/3045392>



Plug, nom. voltage: 500 V, nominal current: 24 A, number of positions: 1, connection method: Screw connection, Rated cross section: 2.5 mm², cross section: 0.14 mm²- 4 mm², color: green-yellow

SZS 0,6X3,5 - Screwdriver

1205053

<https://www.phoenixcontact.com/us/products/1205053>



Actuation tool, for ST terminal blocks, insulated, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

UTT 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

X-PEN 0,35 - Marker pen

0811228

<https://www.phoenixcontact.com/us/products/0811228>



Marker pen without ink cartridge, for manual labeling of markers, labeling extremely wipe-proof, line thickness 0.35 mm

UTT 2,5/2P-F - Screw flange

3060474

<https://www.phoenixcontact.com/us/products/3060474>



Screw flange, for screwing COMBI plugs, with the same structure and pitch as the relevant COMBI terminal blocks

UTTB 2,5/2P-PE - Protective conductor double-level terminal block



3060380

<https://www.phoenixcontact.com/us/products/3060380>

SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com