

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Safety relay for emergency stop, safety door, and solenoid switches and for light grids, up to SIL 3 or Cat. 4, PL e in accordance with EN ISO 13849, 2 N/O contacts, TBUS interface, automatic or manual activation, plug-in screw connection terminal blocks

Your advantages

- Up to Cat. 4/PL e in accordance with ISO 13849-1, SIL 3 in accordance with EN IEC 62061, SIL 3 in accordance with IEC 61508
- Modular system with TBUS extension
- For emergency stop and safety door monitoring, plus evaluation of light grids
- 2 enabling current paths, 1 signaling current path
- 1- and 2-channel control

Commercial data

| | |
|--------------------------------------|---------------------|
| Item number | 2981486 |
| Packing unit | 1 pc |
| Minimum order quantity | 1 pc |
| Sales key | DN01 |
| Product key | DNA211 |
| Catalog page | Page 231 (C-6-2019) |
| GTIN | 4046356051682 |
| Weight per piece (including packing) | 229.1 g |
| Weight per piece (excluding packing) | 224.8 g |
| Customs tariff number | 85371098 |
| Country of origin | DE |

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



Technical data

Product properties

| | |
|-------------------------|--|
| Product type | Safety relays |
| Product family | PSRclassic |
| Application | Emergency stop Safety door Light grid Solenoid switch |
| Mechanical service life | approx. 10^7 cycles |
| Relay type | Electromechanical relay with force-guided contacts in accordance with IEC/EN 61810-3 |

Electrical properties

| | |
|--|--|
| Maximum power dissipation for nominal condition | 1.68 W |
| Nominal operating mode | 100% operating factor |
| Air clearances and creepage distances between the power circuits | |
| Rated insulation voltage | 250 V |
| Rated surge voltage/insulation | 4 kV / Basic isolation, (safe isolation, reinforced insulation and 6 kV between input circuit and enabling current paths.) |

Input data

General

| | |
|---|--|
| Rated control circuit supply voltage U_S | 24 V DC |
| Voltage range with reference to U_S | 0.85 ... 1.1 |
| Power consumption at U_S | typ. 1.7 W |
| Rated control supply current I_S | typ. 70 mA |
| Voltage at input/start and feedback circuit | approx. 24 V DC |
| Typical response time | 20 ms (manual start) 150 ms (automatic start) |
| Typical release time | 10 ms |
| Recovery time | 1 s |
| Protective circuit | Reverse polarity protection; Suppressor diode () |
| Max. permissible overall conductor resistance | 50 Ω (Input and start circuits at U_S) |

Output data

| | |
|-----------------------------|--|
| Contact switching type | 2 enabling current paths 1 semiconductor signaling output |
| Contact material | AgSnO ₂ |
| Maximum switching voltage | 250 V AC/DC (Enabling current paths) 24 V (signal output) |
| Minimum switching voltage | 15 V AC/DC (Enabling current paths) |
| Limiting continuous current | 6 A (Enabling current paths) |

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



| | |
|--|---|
| Maximum inrush current | 100 mA (signal output) |
| Inrush current, minimum | 6 A |
| Sq. Total current | 25 mA (Enabling current paths) |
| Interrupting rating (ohmic load) max. | $72 \text{ A}^2 (\text{I}_{\text{TH}}^2 = \text{I}_1^2 + \text{I}_2^2)$ |
| | 144 W (24 V DC, $\tau = 0 \text{ ms}$) |
| | 288 W (48 V DC, $\tau = 0 \text{ ms}$) |
| | 77 W (110 V DC, $\tau = 0 \text{ ms}$) |
| | 88 W (220 V DC, $\tau = 0 \text{ ms}$) |
| | 1500 VA (250 V AC, $\tau = 0 \text{ ms}$) |
| Maximum interrupting rating (inductive load) | 48 W (24 V DC, $\tau = 40 \text{ ms}$) |
| | 40 W (48 V DC, $\tau = 40 \text{ ms}$) |
| | 35 W (110 V DC, $\tau = 40 \text{ ms}$) |
| | 33 W (220 V DC, $\tau = 40 \text{ ms}$) |
| Switching capacity | min. 0.4 W (Enabling current paths) |
| Switching capacity (360/h cycles) | 6 A (24 V DC) |
| Switching capacity (3600/h cycles) | 5 A (230 V (AC15)) |
| | 3 A (24 V (DC13)) |
| | 3 A (230 V (AC15)) |
| Output fuse | 10 A gL/gG NEOZED (Enabling current paths) |
| | Miniature circuit breaker C6 (24 V / 20 A power supply unit) |

Connection data

Connection technology

| | |
|-----------|-----|
| pluggable | yes |
|-----------|-----|

Conductor connection

| | |
|----------------------------------|---|
| Connection method | Screw connection |
| Conductor cross section rigid | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross section flexible | 0.2 mm ² ... 2.5 mm ² |
| Conductor cross-section AWG | 24 ... 12 |
| Stripping length | 7 mm |
| Screw thread | M3 |

Dimensions

| | |
|--------|----------|
| Width | 22.5 mm |
| Height | 99 mm |
| Depth | 114.5 mm |

Material specifications

| | |
|------------------|-------------------|
| Color (Housing) | yellow (RAL 1018) |
| Housing material | Polyamide |

Characteristics

Safety data

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



Stop category

0

Safety data: EN ISO 13849

Category

4 (Undelayed contacts)

Performance level (PL)

e

Safety data: IEC 61508 - High demand

Safety Integrity Level (SIL)

3

Safety data: IEC 61508 - Low demand

Safety Integrity Level (SIL)

3

Safety data: EN IEC 62061

Safety Integrity Level (SIL)

3

Environmental and real-life conditions

Ambient conditions

| | |
|--|---|
| Degree of protection | IP20 |
| Min. degree of protection of inst. location | IP54 |
| Ambient temperature (operation) | -20 °C ... 55 °C |
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Maximum altitude | ≤ 2000 m (Above sea level) |
| Max. permissible humidity (storage/transport) | 75 % (on average, 85% infrequently, non-condensing) |
| Max. permissible relative humidity (operation) | 75 % (on average, 85% infrequently, non-condensing) |

Standards and regulations

Air clearances and creepage distances between the power circuits


| | |
|-----------------------|-------------|
| Standards/regulations | IEC 60664-1 |
|-----------------------|-------------|

Mounting

| | |
|-------------------|-------------------|
| Mounting type | DIN rail mounting |
| Mounting position | any |


Drawings

Connection diagram

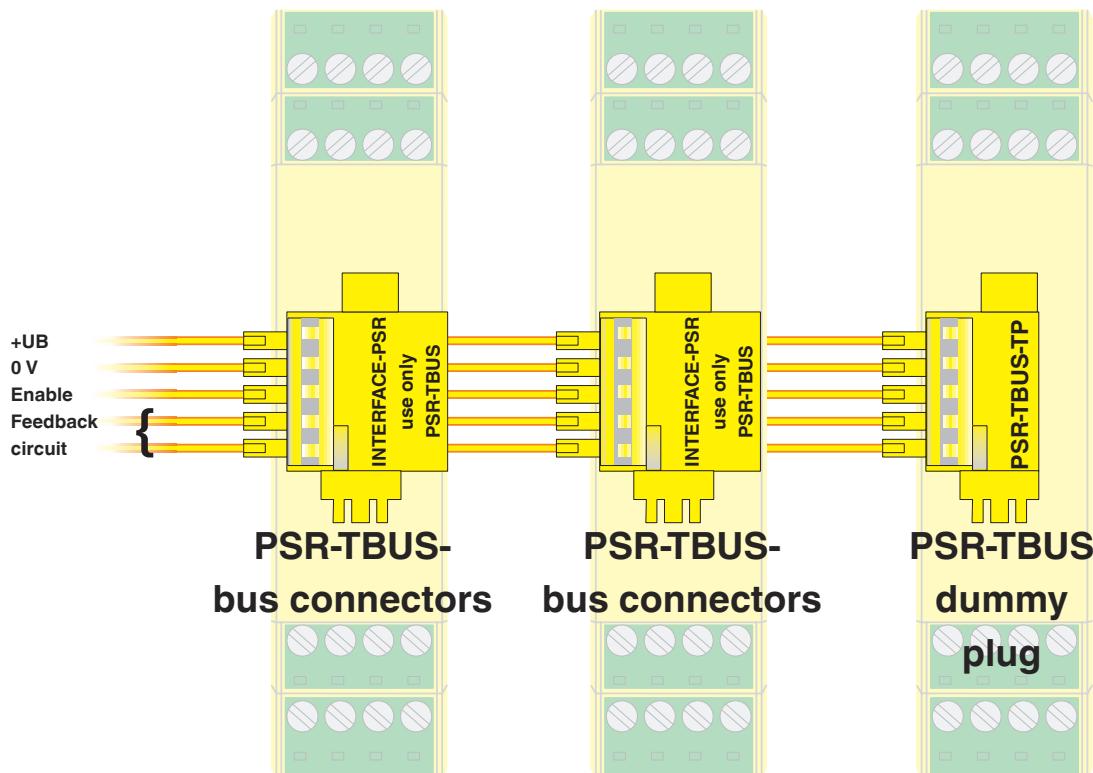

PSR-TBUS DIN rail connectors are used for cross-wiring between the modules.

Circuit diagram

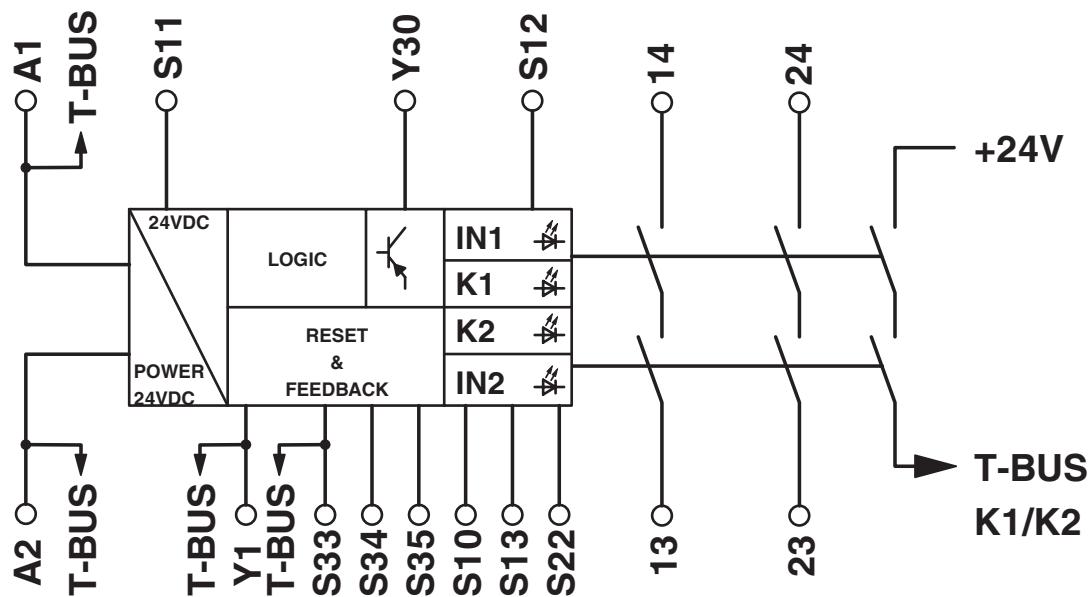


PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486


<https://www.phoenixcontact.com/us/products/2981486>

PHÖNIX CONTACT

Circuit diagram

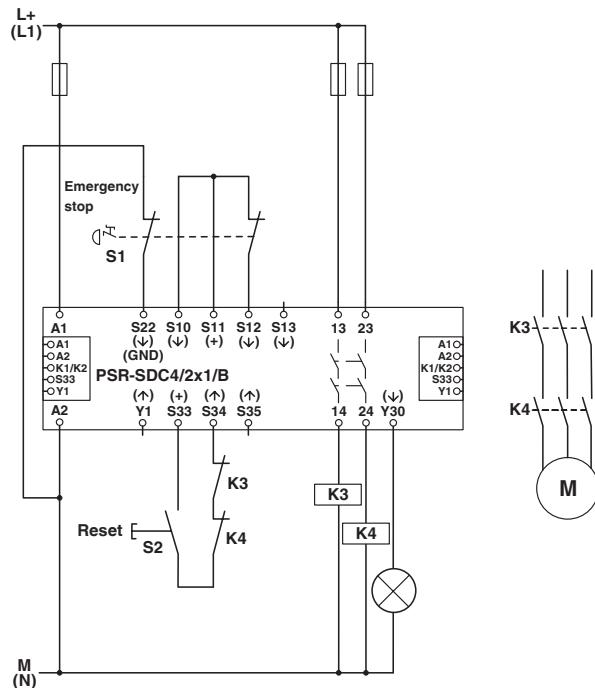

Circuit diagram

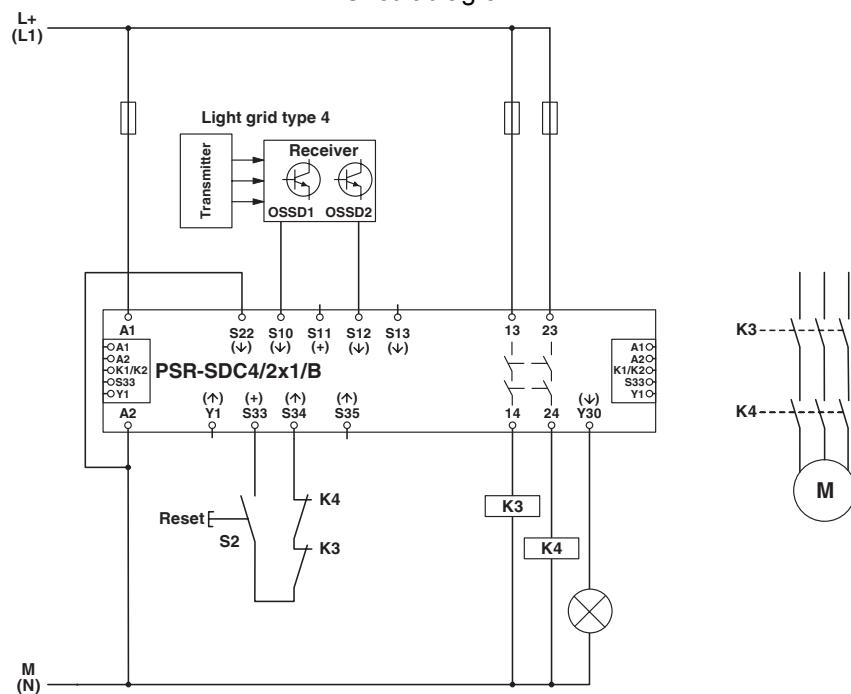


PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>

PHÖNIX CONTACT

Circuit diagram

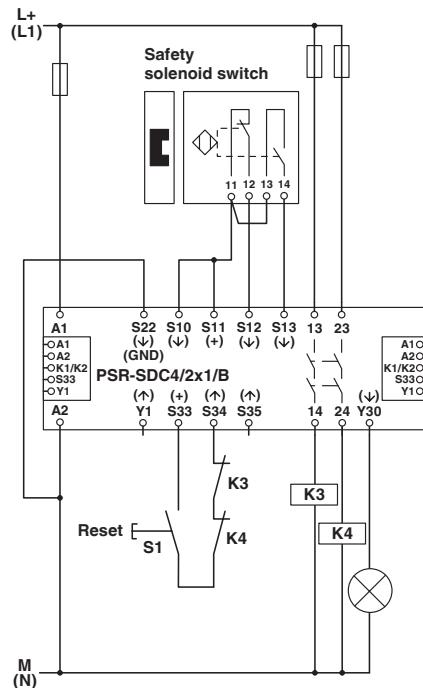

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2981486>



EAC

Approval ID: TR_TS_D_00573_c



UL Listed

Approval ID: FILE E 140324



cUL Listed

Approval ID: FILE E 140324



Functional Safety

Approval ID: 01/205/0660.03/22



Functional Safety

Approval ID: 968/EZ 369.05/22

cULus Listed

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



Classifications

ECLASS

| | |
|-------------|----------|
| ECLASS-11.0 | 27371819 |
| ECLASS-13.0 | 27371819 |
| ECLASS-12.0 | 27371819 |

ETIM

| | |
|----------|----------|
| ETIM 9.0 | EC001449 |
|----------|----------|

UNSPSC

| | |
|-------------|----------|
| UNSPSC 21.0 | 39122200 |
|-------------|----------|

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



Environmental product compliance

EU RoHS

| | |
|---|--------------|
| Fulfills EU RoHS substance requirements | Yes |
| Exemption | 7(a), 7(c)-I |

China RoHS

| | |
|---|---------|
| Environment friendly use period (EFUP) | EFUP-50 |
| An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required. | |

EU REACH SVHC

| | |
|-------------------------------------|--------------------------------------|
| REACH candidate substance (CAS No.) | Lead(CAS: 7439-92-1) |
| SCIP | d72e7db1-94f1-4bbe-b1b1-ea81c50ae8cb |

PSR-SCP- 24DC/SDC4/2X1/B - Safety relays



2981486

<https://www.phoenixcontact.com/us/products/2981486>

Accessories

PSR-TBUS - DIN rail bus connectors

2890425

<https://www.phoenixcontact.com/us/products/2890425>

DIN rail connector for safety switching devices, for supplying/controlling/monitoring (depending on the module)



PSR-TBUS-TP - DIN rail bus connectors

2981716

<https://www.phoenixcontact.com/us/products/2981716>

Blind plug for the PSR-TBUS DIN rail connector used with the modular safety relay system (PSR-SDC4)



PSR-SCP- 24DC/SDC4/2X1/B - Safety relays

2981486

<https://www.phoenixcontact.com/us/products/2981486>



PSR-TBUS - 1PCS - DIN rail bus connectors

1326060

<https://www.phoenixcontact.com/us/products/1326060>

DIN rail connector for safety switching devices, for supplying/controlling/monitoring (depending on the module)



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com