

HDP26-24-9PN

✓ ACTIVE

DEUTSCH | DEUTSCH HD, DEUTSCH HDP

TE Internal #: HDP26-24-9PN

Housing for Male Terminals, Wire-to-Wire, 9 Position, Sealable, Black, Wire & Cable, Power & Signal, Cable Mount (Free-Hanging), Hybrid

[View on TE.com >](#)



Connectors > Automotive Connectors > Automotive Housings > DEUTSCH HDP20 Housings



Connector System: Wire-to-Wire

Number of Positions: 9

Connector & Housing Type: Housing for Male Terminals

Sealable: Yes

Mating Pin Diameter: 2.39 mm, 3.61 mm, 5.72 mm [.094 in, .142 in, .225 in]

[All DEUTSCH HDP20 Housings \(357\)](#)

Features

Product Type Features

Mixed & Hybrid Connector	Yes
Connector Shape	Circular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Contact Retainer

Configuration Features

Blank Cavity Position	0
Connector Seal Code	N Seal
Number of Positions	9

Electrical Characteristics

Operating Voltage	250 VAC
Nominal Voltage Architecture	12 V, 24 V, 48 V

Body Features

Cable Exit Angle	180°
Primary Product Color	Black



Contact Features

Contact Size	Size 12, Size 4, Size 8
Contact Type	Pin
Mating Pin Diameter	2.39 mm, 3.61 mm, 5.72 mm[.094 in][.142 in][.225 in]
Contact Current Rating (Max)	25 A, 60 A, 100 A

Mechanical Attachment

Terminal Position Assurance	No
Strain Relief	Add By Accessory
Mating Alignment Type	Guide Slot
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Housing Material	PA GF
------------------	-------

Dimensions

Connector Height	49.53 mm[1.95 in]
Product Width	49.53 mm[1.95 in]
Product Length	38.63 mm[1.521 in]
Compatible Insulation Diameter Range	3.4 - 4.32 mm, 4.83 - 6.1 mm, 7.11 - 7.42 mm [.134 - .17 in][.19 - .24 in][.28 - .292 in]

Usage Conditions

Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 - 125 °C[-67 - 257 °F]

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

Degree of Protection	IP67
UL Flammability Rating	20mm Flame Test per Standard UL-94

Packaging Features

Packaging Method	Box
------------------	-----

Other

Serviceable	Yes
-------------	-----



Connector Position Assurance Capable

No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-H3930-PC8382
Plug Protective Caps - DEUTSCH HD30



TE Part # CAT-D48-ST273
DEUTSCH Solid Contacts



TE Part # HD30-24BT-BK
BOOT, 24SZ, ST, BLK



TE Part # HD30-24BT
BOOT, 24SZ, ST, GRY



TE Part # HD30-24BT-90-BK
BOOT, 24SZ, RA, BLK



TE Part # CAT-D48-SP729
DEUTSCH Sealing Plugs



TE Part # CAT-H396-CH8172
DEUTSCH HDP20 Housings



TE Part # 114009-ZZ
EXT TOOL, SIZE 4, 6 AWG, N, WHT



TE Part # 114008-ZZ
EXT TOOL, SIZE 8, 8-10 AWG, N, GRN



TE Part # 114010-ZZ
EXT TOOL, SIZE 12, 12 AWG, N, YEL



TE Part # 1060-12-0144
PIN, SF, SIZE 12, 12-14, AU/SN



TE Part # 1060-12-0222
PIN, SF, SIZE 12, 10, NI/NI



TE Part # 1060-12-0166
PIN, SF, SIZE 12, 12-14, NI/SN



TE Part # 1060-12-0244
PIN, SF, SIZE 12, 10, AU/SN

Also in the Series | **DEUTSCH HD**



Automotive Connector Caps & Covers
(32)



Automotive Housings(768)



Connector Backshells(29)



Connector Seals & Cavity Plugs(10)




Connector Strain Relief(5)



Insertion & Extraction Tools(11)



Other Automotive Connector Accessories(11)

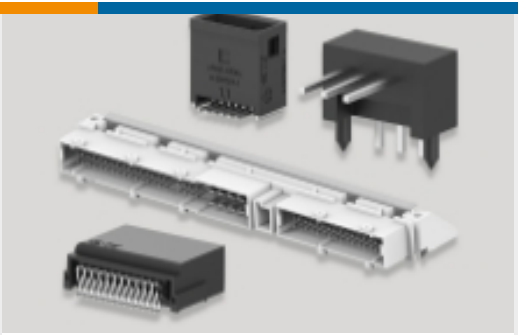

PCB Headers & Receptacles(1)

Also in the Series | **DEUTSCH HDP**



Automotive Connector Caps & Covers (4)



Automotive Housings(357)



Connector Backshells(8)



Connector Seals & Cavity Plugs(1)



Insertion & Extraction Tools(11)



Other Automotive Connector Accessories(5)

Customers Also Bought



TE Part # HDP26-18-14PN
DEUTSCH HDP20 Housings




TE Part # DTHD04-1-4P
REC, 1P, BLK, N, SIZE 4



TE Part # T4111502041-000
M12,MALE,STRAIGHT,D CODE,4P, PG9,GOLD



TE Part # DT04-08PA-P028
REC, 8P, GRY, BUSBAR 5X3, NICKEL, A

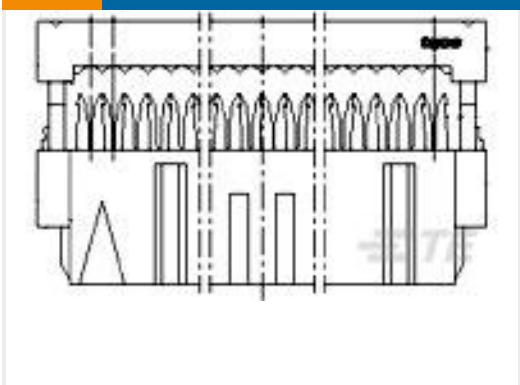

TE Part # 6-215882-4
64 WAY GREY MK II RECP



TE Part # DTM12P-BT
BOOT, 12P, REC, ST, GRY



TE Part # 0460-204-0490
DEUTSCH Solid Contacts



TE Part # AEC16-40SU
PLG, 40P, BLK, N, U



Documents

Product Drawings

PLG, 9P, BLK, N, 4/8/12, P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_HDP26-24-9PN_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_HDP26-24-9PN_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_HDP26-24-9PN_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Agency Approvals

UL Report

English