

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Active termination resistor for PROFIBUS and RS-485 bus systems, redundant power supply, routing of the supply voltage via DIN rail connector, electrical isolation, switchable termination, integrated programming interface

Product description

PROFIBUS or other RS-485 networks can be actively terminated at the bus end using the **PSI-TERMINATOR-PB-TBUS**. This ensures safe communication even if the bus device is connected/disconnected during operation. In addition, the connectable termination enables the device to be operated as a service interface at any point in the bus system. For the operation of active programming devices, the required power supply is provided at the alternative D-SUB connection. When several devices are installed in combination, the supply voltage can be conveniently routed through the DIN rail connector.

Your advantages

- Diagnostic LEDs for voltage and data activity
- Interference-free bus communication thanks to active termination
- Compact housing design
- Fixed programming interface in the network
- Termination can be connected externally
- Installation as single device or in combination with other devices
- Extended temperature range of -40 °C ... +70 °C
- Electrical isolation of power supply and data interface
- Redundant power supply
- Supply voltage routed through a DIN rail connector for use in combination with other devices

Commercial data

Item number	2702636
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DN11
Product key	DNC141
Catalog page	Page 424 (C-6-2019)
GTIN	4055626251530
Weight per piece (including packing)	140.2 g
Weight per piece (excluding packing)	134 g
Customs tariff number	85389091
Country of origin	DE

PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>



Technical data

Notes

Utilization restriction

EMC note	EMC: class A product, see manufacturer's declaration in the download area
----------	---

Utilization restriction

CCCx note	Use in potentially explosive areas is not permitted in China.
-----------	---

Product properties

Product type	Terminal resistor
MTTF	3305 Years (SN 29500 standard, temperature 25°C, operating cycle 21%)
	1923 Years (SN 29500 standard, temperature 40°C, operating cycle 34.25%)
	911 Years (SN 29500 standard, temperature 40°C, operating cycle 100%)

Insulation characteristics

Overvoltage category	II
----------------------	----

Insulation characteristics

Pollution degree	2
------------------	---

Electrical properties

Electrical isolation	RS-485 // VCC
Maximum power dissipation for nominal condition	0.24 W
Test voltage data interface/power supply	1.5 kV AC (50 Hz, 1 min.)

Supply

Supply voltage range	18 V DC ... 30 V DC (via pluggable COMBICON screw terminal block)
Nominal supply voltage	24 V DC (via pluggable COMBICON screw terminal block)
Typical current consumption	10 mA (24 V DC, no load on D-SUB)
	60 mA (24 V DC, current drain at D-SUB of 150 mA)
Max. current consumption	12 mA (18 V DC, no load on D-SUB)
	77 mA (18 V DC, current drain at D-SUB of 150 mA)

Function

Status and diagnostic indicators	LEDs: US (power supply), ACT (data activity)
----------------------------------	--

Connection data

Supply

Single conductor/terminal point, rigid	0.2 mm ² ... 2.5 mm ²
Single-wire/terminal point, flexible	0.2 mm ² ... 2.5 mm ²

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

Conductor cross section, flexible [AWG]	24 ... 12
Tightening torque	0.6 Nm ... 0.8 Nm

Interfaces

Signal	Modbus
	PROFIBUS

Data: PROFIBUS acc. to IEC 61158, RS-485 2-conductor

Serial transmission speed	≤ 12 Mbps
Connection method	D-SUB-9, COMBICON
Transmission length	≤ 1200 m (Depends on transmission speed and cable type)
Termination resistor	390 Ω
	220 Ω
	390 Ω (Can be connected)
Single conductor/terminal point, rigid	0.2 mm ² ... 1.5 mm ²
Single-wire/terminal point, flexible	0.2 mm ² ... 1.5 mm ²
Max. AWG conductor cross section, flexible	16
Min. AWG conductor cross section, flexible	24
Single-wire/terminal point, rigid AWG max.	16
Single-wire/terminal point, rigid AWG min.	24
Output nominal voltage	5 V DC

Dimensions

Dimensional drawing	
Width	22.5 mm
Height	92 mm
Depth	73 mm

Material specifications

Color (Housing)	green (RAL 6021)
Material (Housing)	PA 6.6-FR

Environmental and real-life conditions

Ambient conditions	
Degree of protection	IP20
Ambient temperature (operation)	-40 °C ... 70 °C
Ambient temperature (storage/transport)	-40 °C ... 85 °C
Altitude	≤ 5000 m (For restrictions, see the manufacturer's declaration for altitude operation) ≤ 2000 m (Restrictions for ATEX applications)

PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>



Permissible humidity (operation)	10 % ... 95 % (non-condensing)
Air pressure (operation)	≤ 80 kPa (When used in EX zone 2)

Approvals

CE

Certificate	CE-compliant
-------------	--------------

ATEX

Identification	Ex II 3 G Ex nA IIC T4 Gc X
Note	Please follow the special installation instructions in the documentation!

UL, USA/Canada

Identification	508 Listed
----------------	------------

Corrosive gas test

Identification	ISA-S71.04-1985 G3 Harsh Group A
----------------	----------------------------------

EMC data

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

Electrostatic discharge

Standards/regulations	EN 61000-4-2
-----------------------	--------------

Electrostatic discharge

Contact discharge	± 6 kV (Test Level 3)
Discharge in air	± 8 kV (Test Level 3)
Indirect discharge	± 6 kV
Comments	Criterion B

Electromagnetic HF field

Standards/regulations	EN 61000-4-3
-----------------------	--------------

Electromagnetic HF field

Frequency range	80 MHz ... 3 GHz (Test Level 3)
Field intensity	10 V/m
Comments	Criterion A

Fast transients (burst)

Standards/regulations	EN 61000-4-4
-----------------------	--------------

Fast transients (burst)

Input	± 2.2 kV (Test Level 3)
Signal	± 2.2 kV (Test Level 3)
Comments	Criterion B

Surge current load (surge)

Standards/regulations	EN 61000-4-5
-----------------------	--------------

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

Surge current load (surge)

Input	± 0.5 kV (sym./asym.)
Signal	± 1 kV (Data line, asymmetrical)
Comments	Criterion B

Conducted interference

Standards/regulations	EN 61000-4-6
-----------------------	--------------

Conducted interference

Frequency range	0.15 MHz ... 80 MHz
Comments	Criterion A
Voltage	10 V

Emitted interference

Standards/regulations	EN 55011
Comments	Class A, industrial applications

Criteria

Criterion A	Normal operating behavior within the specified limits.
Criterion B	Temporary impairment to operational behavior that is corrected by the device itself.

Standards and regulations

Free from substances that could impair the application of coating	in accordance with VW-AUDI-Seat central standard P-VW 3.10.7 57 65 0
---	---

Mounting

Mounting type	DIN rail mounting
---------------	-------------------

PSI-TERMINATOR-PB-TBUS - Termination resistor




2702636

<https://www.phoenixcontact.com/us/products/2702636>

Drawings

Schematic diagram

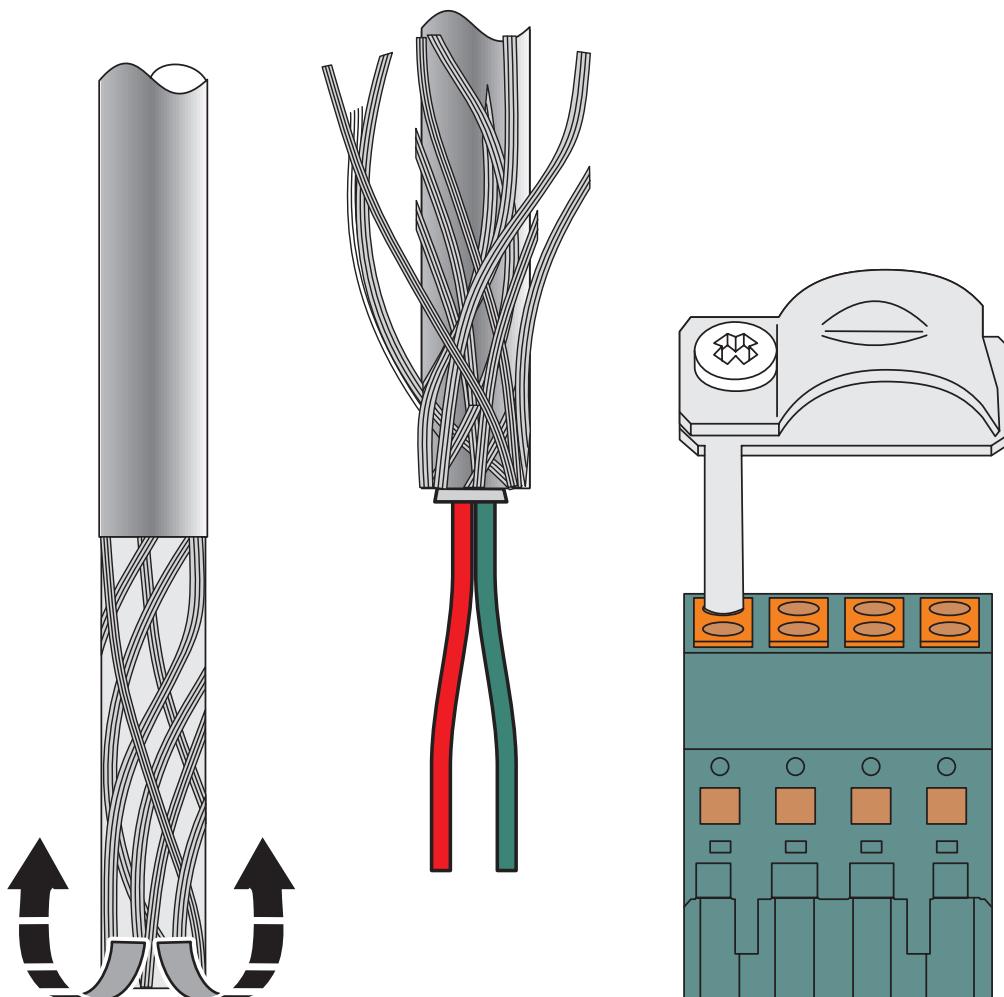

Push the braided shield back


PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>



Schematic diagram

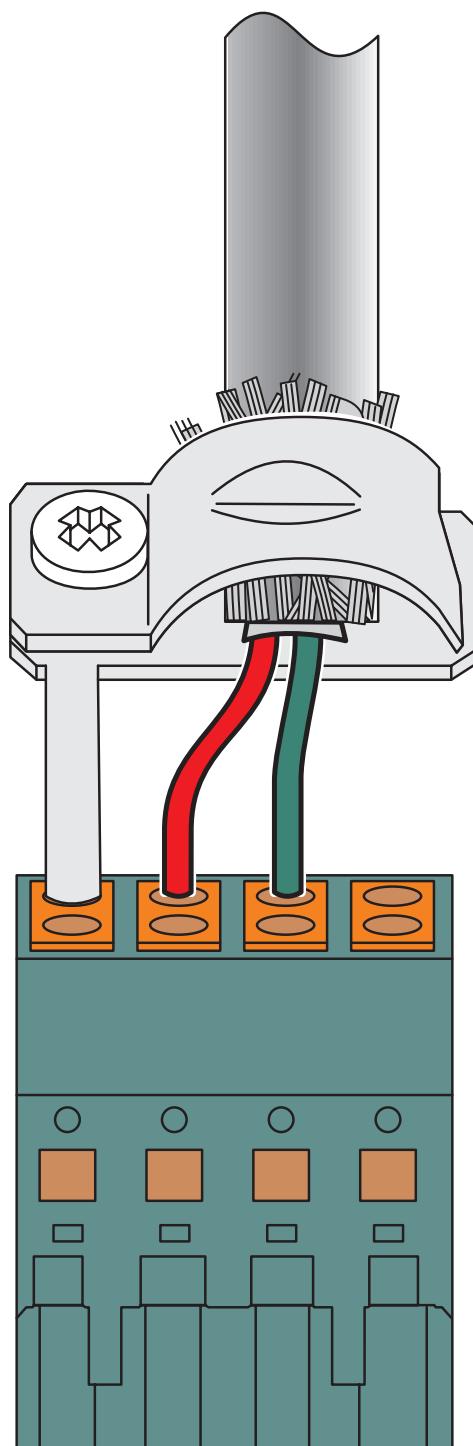

Connecting cables with a shield clamp


PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

Schematic diagram

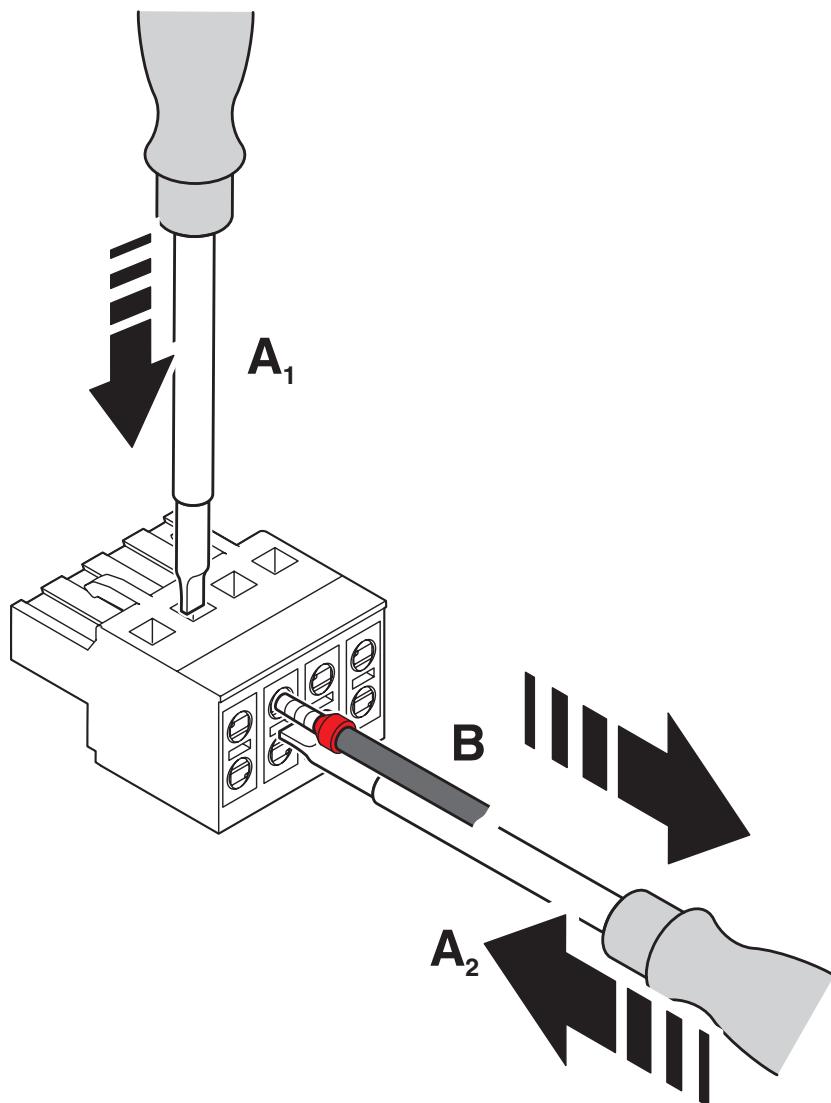

Deinstall signal cable


PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>

PHÖNIX CONTACT

Block diagram

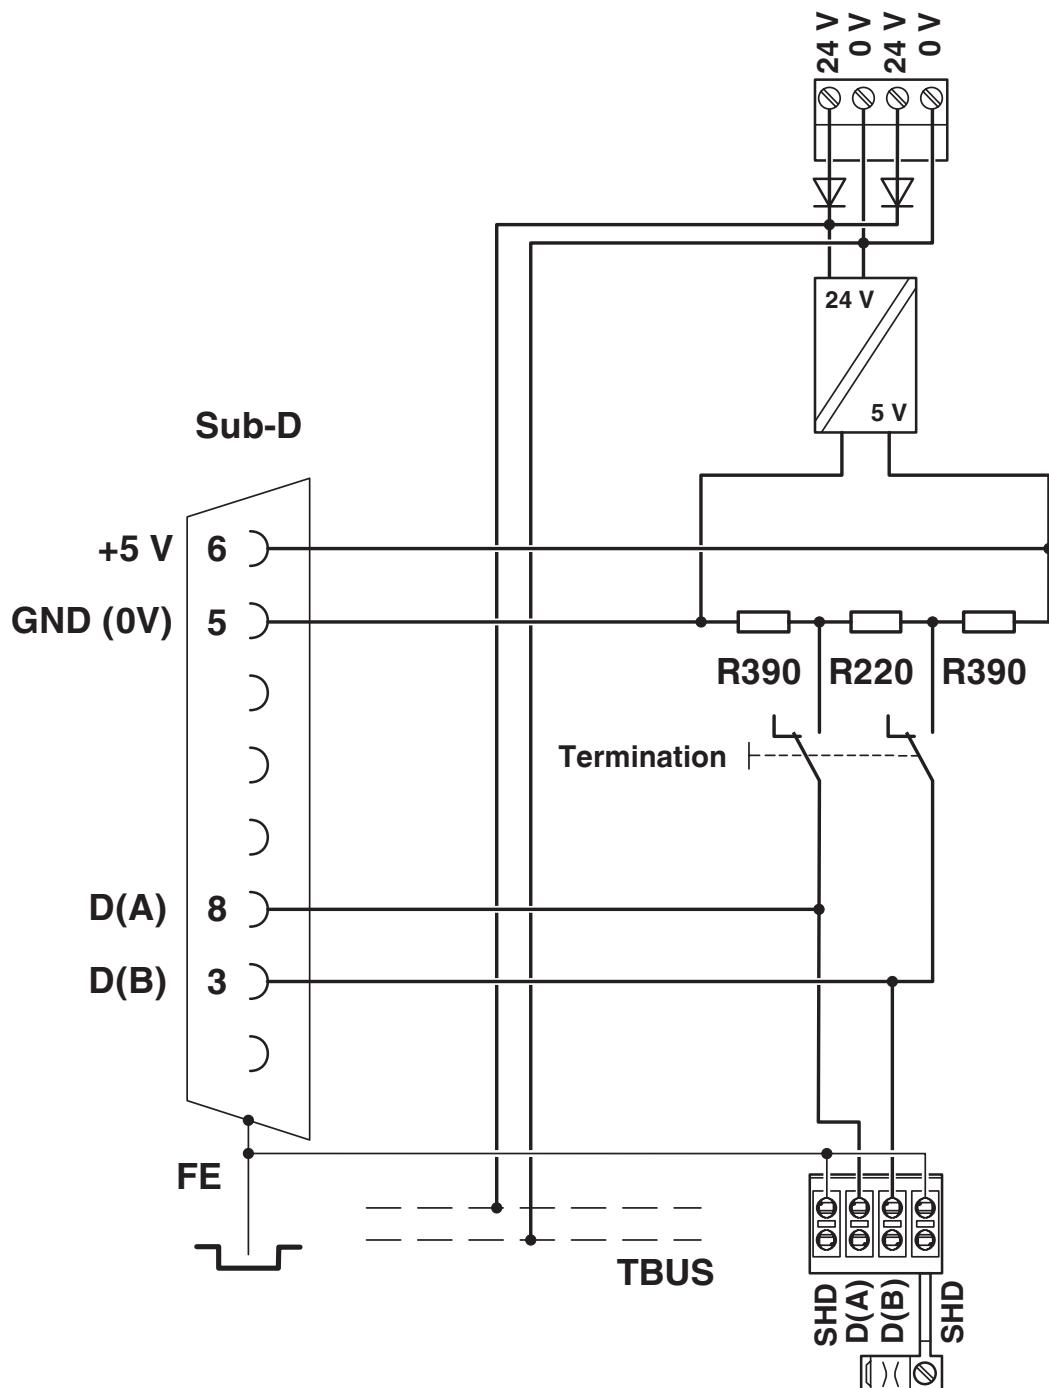

Basic circuit diagram


PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636


<https://www.phoenixcontact.com/us/products/2702636>

Schematic diagram

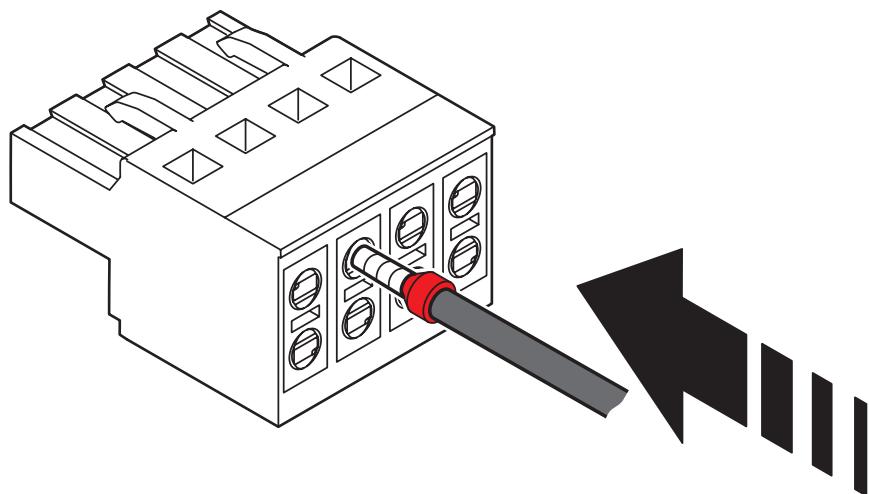

Install signal cable


Dimensional drawing

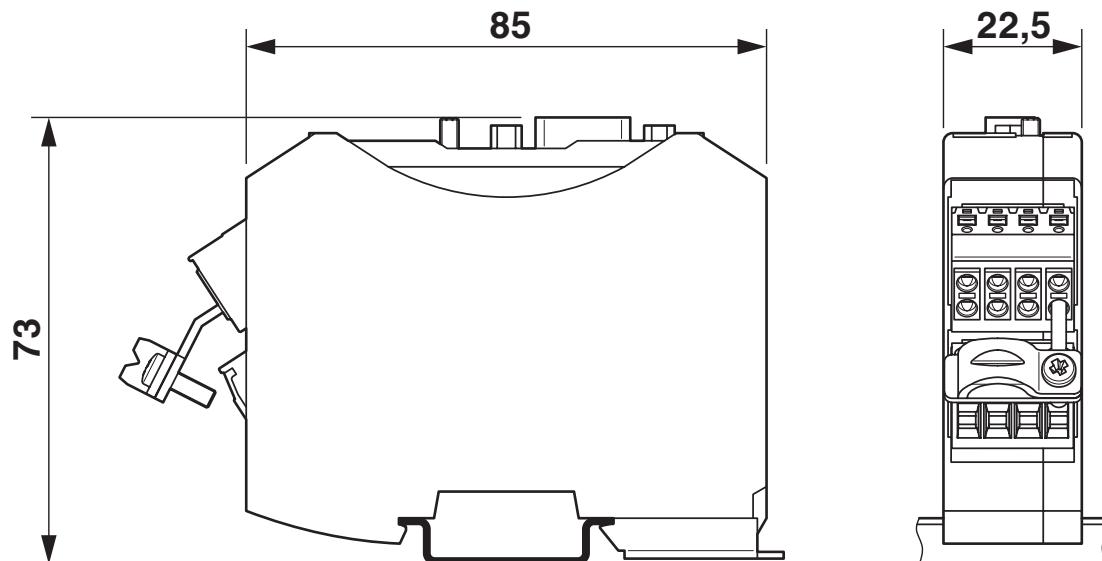

Compact housing

Application drawing

Termination operation

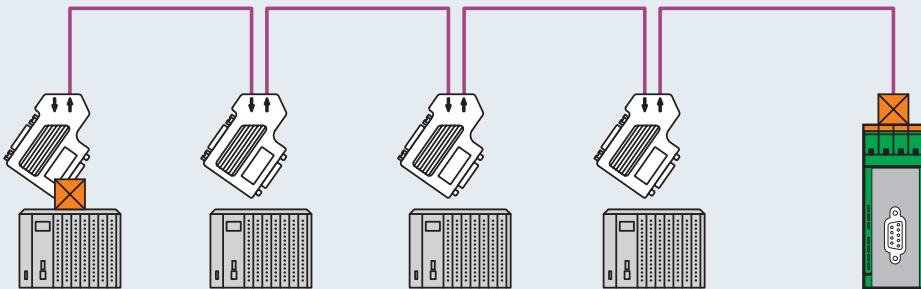

Termination=ON

 = Active bus termination resistor

Permanent termination at the end of the (professional) bus system


PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

Schematic diagram

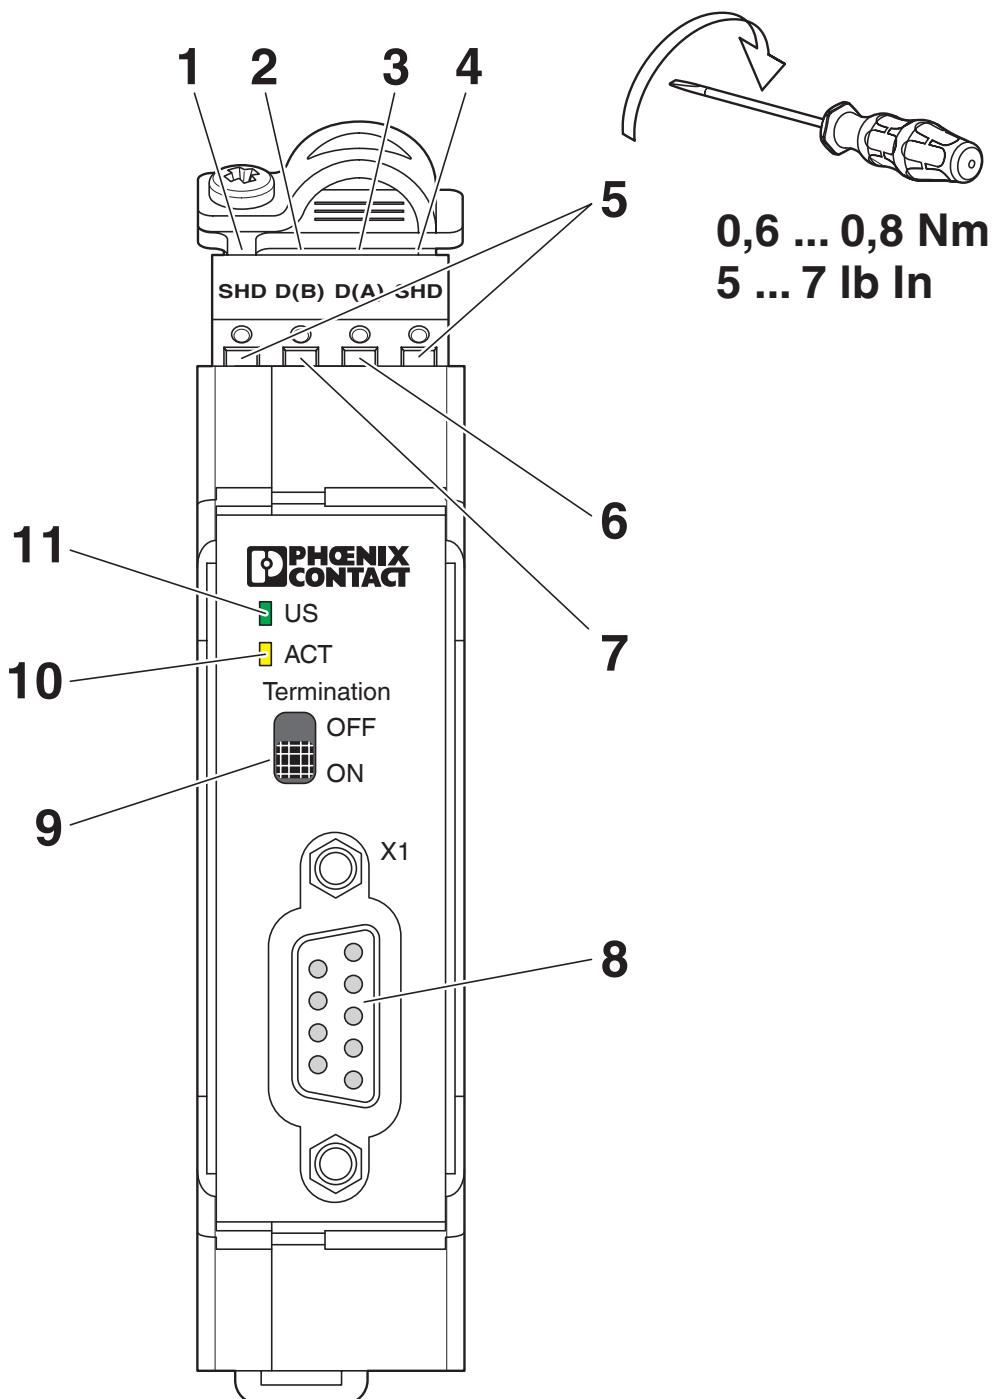

Front view

PSI-TERMINATOR-PB-TBUS - Termination resistor




2702636

<https://www.phoenixcontact.com/us/products/2702636>

Application drawing

Programming access

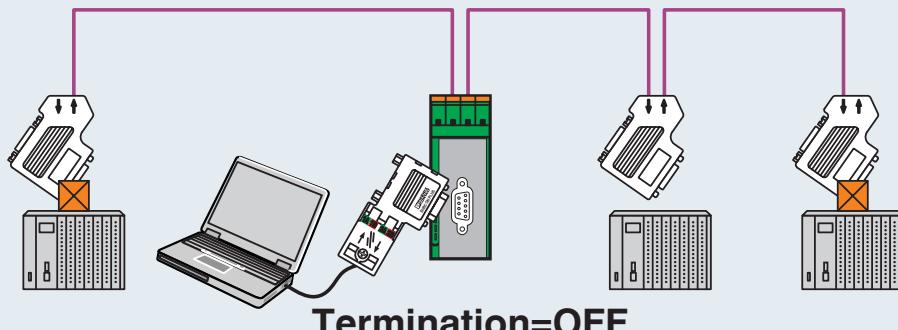

= Active bus termination resistor

Fixed service interface in (professional) bus system

PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702636>

UAE-RoHS

Approval ID: 23-02-63194



cULus Listed

Approval ID: E238705



ATEX

Approval ID: PxCIF16ATEX2702636X

PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>



Classifications

ECLASS

ECLASS-11.0	19070403
ECLASS-12.0	19070403
ECLASS-13.0	19070403

ETIM

ETIM 9.0	EC000448
----------	----------

UNSPSC

UNSPSC 21.0	32121600
-------------	----------

PSI-TERMINATOR-PB-TBUS - Termination resistor

2702636

<https://www.phoenixcontact.com/us/products/2702636>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	7(a), 7(c)-I

China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	d60f1396-450b-48d2-9be3-ffd4cd90d5f7

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

Accessories

ME 22,5 TBUS 1,5/ 5-ST-3,81 GN - DIN rail bus connectors

2707437

<https://www.phoenixcontact.com/us/products/2707437>



DIN rail connector, color: green, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, product range: TBUS5-22,5.., pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts

SUBCON-PLUS-PROFIB/90/IDC - D-SUB bus connector

2313672

<https://www.phoenixcontact.com/us/products/2313672>



D-SUB connector, 9-pos., male connector, 90° cable entry, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; IDC terminal block connection

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

SUBCON-PLUS-PROFIB/90/PG/IDC - D-SUB bus connector

2313685

<https://www.phoenixcontact.com/us/products/2313685>

D-SUB connector, 9-pos., male connector, 90° cable entry, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; IDC terminal block connection



SUBCON-PLUS-PROFIB/90/SC - D-SUB bus connector

2313698

<https://www.phoenixcontact.com/us/products/2313698>

D-SUB connector, 9-pos., male connector, 90° cable entry, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks



PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

SUBCON-PLUS-PROFIB/90/PG/SC - D-SUB bus connector

2313708

<https://www.phoenixcontact.com/us/products/2313708>

D-SUB connector, 9-pos., male connector, 90° cable entry, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks



SUBCON-PLUS-PROFIB/35/M12 - D-SUB bus connector

2902320

<https://www.phoenixcontact.com/us/products/2902320>

D-SUB plug, 9-pos., pin, assignment: 3, 5, 6, 8; two 35° cable entries M12 (B-coded). Bus system: PROFIBUS DP up to 12 Mbps. Termination resistor via separate M12 terminator.



PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

SUBCON-PLUS-PROFIB/90/M12 - D-SUB bus connector

2902318

<https://www.phoenixcontact.com/us/products/2902318>

D-SUB plug, 9-pos., pin, assignment: 3, 5, 6, 8; two 90° M12 cable glands (B-coded). Bus system: PROFIBUS DP up to 12 Mbps. Termination resistor via separate M12 terminator.



SUBCON-PLUS-PROFIB/90X/M12 - D-SUB bus connector

2902729

<https://www.phoenixcontact.com/us/products/2902729>

D-SUB plug, 9-pos., pin, assignment: 3, 5, 6, 8; two 90° cable entries M12 (B-coded). Bus system: PROFIBUS DP up to 12 Mbps. Termination resistor via separate M12 terminator. Long version; S7-compatible.



PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

PSM-CABLE-PROFIB/FC - Bus system cable

2744652

<https://www.phoenixcontact.com/us/products/2744652>

By the meter, Bus system cable, PROFIBUS (12 Mbps), shielded, PVC FR VI/PVC, violet, 2-wire (1x2xAWG22/1), color single wire: red, green, cable length: Free entry (1.0 ... 1000.0 m)



SZF 0-0,4X2,5 - Screwdriver

1204504

<https://www.phoenixcontact.com/us/products/1204504>

Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.4 x 2.5 x 75 mm, 2-component grip, with non-slip grip



PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

PSM-STRIP-FC/PROFIB - Stripping tool

2744623

<https://www.phoenixcontact.com/us/products/2744623>

Quick stripping tool for PROFIBUS cable, type Fast Connect



QUICK WIREFOX 6 - Stripping pliers

1204384

<https://www.phoenixcontact.com/us/products/1204384>

Stripping tool for cables with PVC insulation, stripping range: 0.08 to 6 mm², wire cutting up to 6 mm² flexible or 4 mm² rigid



PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

SUBCON-PLUS-PROFIB/SC2 - D-SUB bus connector

2708232

<https://www.phoenixcontact.com/us/products/2708232>



D-SUB connector, 9-pos., male connector, 35° cable entry, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

SUBCON-PLUS-PROFIB/PG/SC2 - D-SUB bus connector

2708245

<https://www.phoenixcontact.com/us/products/2708245>



D-SUB connector, 9-pos., male connector, 35° cable entry, bus system: PROFIBUS DP up to 12 Mbps with PG D-SUB socket for connecting a programming device, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

SUBCON-PLUS-PROFIB/AX/SC - D-SUB bus connector

2744380

<https://www.phoenixcontact.com/us/products/2744380>



D-SUB connector, 9-pos., male connector, axial version with two cable entries, bus system: PROFIBUS DP up to 12 Mbps, termination resistor can be switched on via slide switch, pin assignment: 3, 5, 6, 8; screw connection terminal blocks

PSI-REP-PROFIBUS/12MB - Repeater

2708863

<https://www.phoenixcontact.com/us/products/2708863>



Modular repeater for electrical isolation and range increase for PROFIBUS up to 12 Mbps, 4-way isolation, rail-mountable, supply 24 V DC

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

PSI-REP-RS485W2 - Repeater

2313096

<https://www.phoenixcontact.com/us/products/2313096>



Modular repeater for electrical isolation and range increase in RS-485 2-wire bus systems up to 500 kbps, 4-way isolation, rail-mountable, supply 24 V DC

PSM-ME-RS485/RS485-P - Repeater

2744429

<https://www.phoenixcontact.com/us/products/2744429>



Repeater, for potential separation and range increase in RS-485 2-wire bus systems, 3-way isolation, rail-mountable

PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

PSM-ME-RS232/RS485-P - Interface converter

2744416

<https://www.phoenixcontact.com/us/products/2744416>

Interface converter, for converting RS-232 (V.24) to RS-422 (V.11) and RS-485, with electrical isolation, 2 channels, rail-mountable



QUINT4-SYS-PS/1AC/24DC/2.5/SC - Power supply unit

2904614

<https://www.phoenixcontact.com/us/products/2904614>

Primary-switched power supply, QUINT POWER, screw connection, DIN rail mounting, supply of devices possible via the Tbus DIN rail connector, protective coating, input: single-phase, output: 24 V DC/2.5 A



PSI-TERMINATOR-PB-TBUS - Termination resistor



2702636

<https://www.phoenixcontact.com/us/products/2702636>

ME 17,5 TBUS 1,5/ 5-ST-3,81 KMGY - DIN rail bus connectors

2713645

<https://www.phoenixcontact.com/us/products/2713645>

DIN rail connector, color: light grey, nominal current: 8 A (parallel contacts), rated voltage (III/2): 125 V, number of positions: 5, product range: TBUS5-17,5.., pitch: 3.81 mm, mounting: DIN rail mounting, locking: without, mounting: without, type of packaging: packed in cardboard, Item with gold-plated contacts, bus connectors for connecting with electronics housings, 5 parallel contacts



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com