



Wire Protection & Management > Adhesives & Sealants > Epoxy Adhesives



Packaging Method: **Dual Pack**
Packaging Quantity: **5**
Heat Resistance Temperature (Max): **150 °C**

Features

Body Features

Color (Supplied)	Black, Gray
Material Systems Code	25

Usage Conditions

Heat Resistance Temperature (Max)	150 °C
-----------------------------------	--------

Packaging Features

Packaging Method	Dual Pack
Packaging Quantity	5

Other

Curing Method	20 °C for 24 hr, 85 °C for 1 hr
Pot Life	90 minute

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC

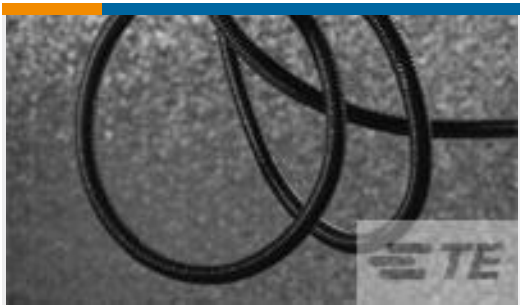
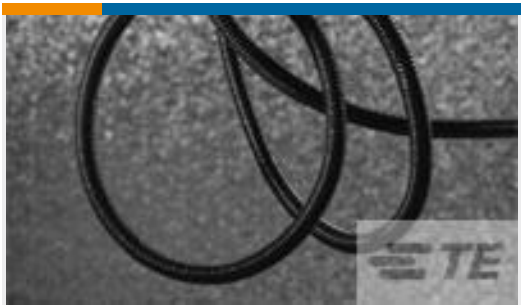
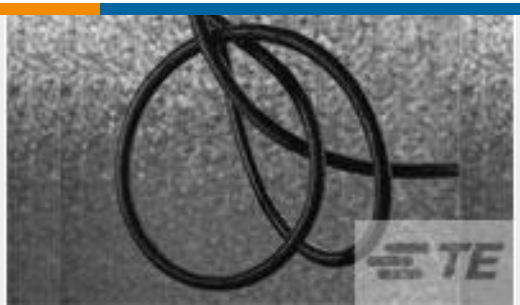
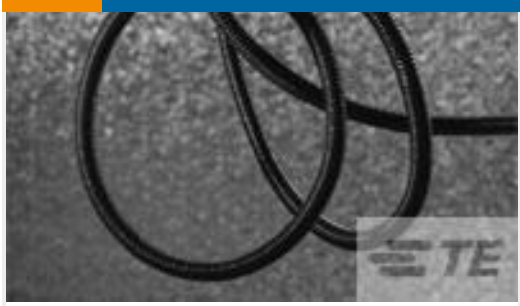
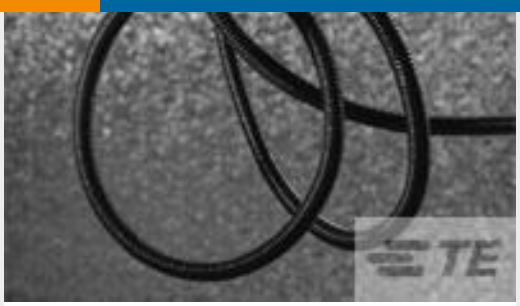
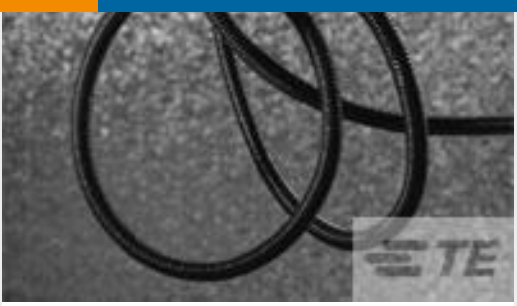
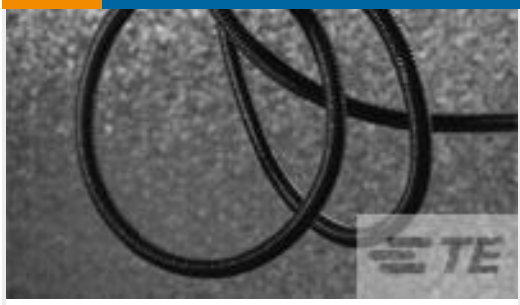
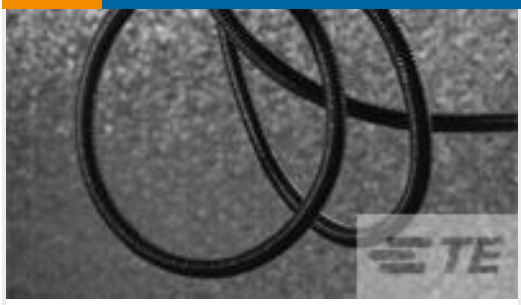
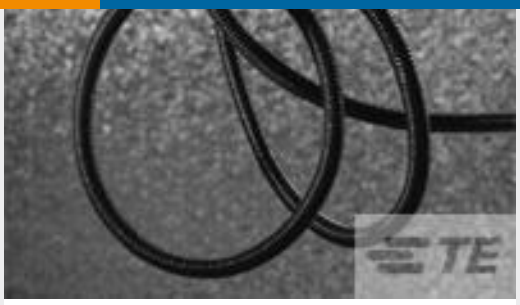
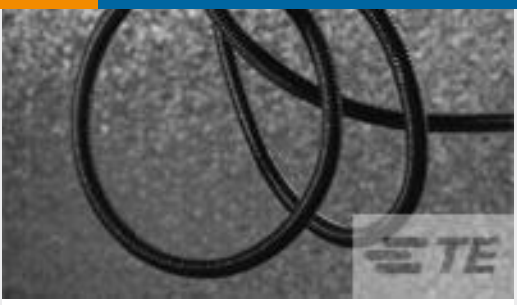


Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

 TE Part # 7662514004 HCTE-1500-0-SP	 TE Part # 2270594002 HCTE-1625-0-SP	 TE Part # 5470284010 CONVOLEX-1-0-SP	 TE Part # CL1665-001 S1125-APPLICATOR
 TE Part # 7730454002 HCTE-1250-0-SP	 TE Part # 3679754004 HCTE-1000-0-SP	 TE Part # 1618474004 HCTE-0625-0-SP	 TE Part # 8918194004 HCTE-0750-0-SP
 TE Part # 6638954004 HCTE-0500-0-SP	 TE Part # 6790994004 HCTE-0187-0-SP	 TE Part # 5172334004 HCTE-0281-0-SP	 TE Part # 7391174004 HCTE-0437-0-SP



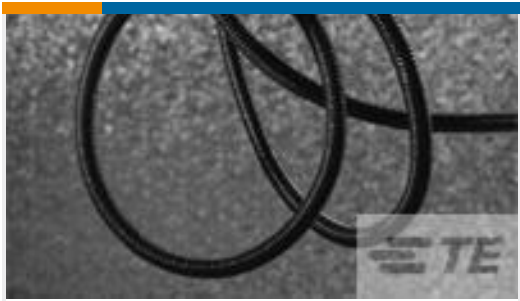


TE Part # 9693274004
HCTE-1750-0-SP



TE Part # 5470014004
CONVOLEX-1-5/8-0-SP



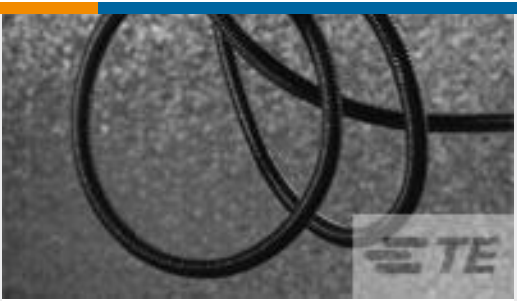TE Part # 5470234017
CONVOLEX-7/16-0-SP



TE Part # 3774834004
HCTE-2000-0-SP

Customers Also Bought



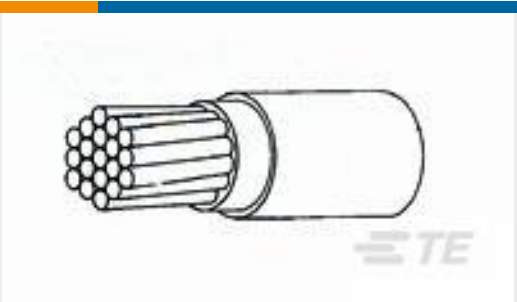
TE Part # 60888-1
058 PIN REC 26-22 .010PTPPHBZ



TE Part # NB13484001
RNF-100-BU Heat Shrink Tubing



TE Part # 30590003
TUBE F INOX_ 316L_ LG:35.5



TE Part # 2821033002
44A0114-24-2



TE Part # 5-1617002-2
B07B112CC1-0301 = RELAY.



TE Part # ZPF0000000000003841
745-8040-10



TE Part # ZPF000000000202371
746-8025-08



TE Part # AAC2388-00
PC4F0036-19NY-2-Z-L250-A

Documents

Product Drawings

S1125-KIT-1

English

Datasheets & Catalog Pages

Adhesives Selection Guide

English

Solutions for Defense Applications Certified to VG Standards

English

Product Specifications

Product Specification

English

Thermofit Adhesive S-1125 Epoxy, Flexible

English

Instruction Sheets

Instruction Sheet (non U.S.)

878462-000

Epoxy Adhesives, Dual Pack, Packaging Quantity 5, Heat Resistance Temperature (Max) 150 °C



English