

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Distributor box, connection method: M12-SPEEDCON-socket Metal, number of slots: 4, number of positions: 5, coding: A, slot assignment: parallel, status display: No, Universal; master cable connection: Pluggable screw connection 180°, shielding: no

Your advantages

- Safety in the field, thanks to molded housing and high degree of protection
- Save time, thanks to installation with SPEEDCON fast locking system
- Flexible: distributor box with connector hood for on-site assembly

Commercial data

Item number	1437258
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF42
Product key	BF3CCD
GTIN	4046356455602
Weight per piece (including packing)	255 g
Weight per piece (excluding packing)	222 g
Customs tariff number	85366990
Country of origin	DE

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Technical data

Notes

Assembly note	NOTE: Observe the permissible bending radii when laying conductors, since the degree of protection may be put in jeopardy if the bending forces are too high. Alleviate mechanical loads upstream of the connector, e.g. by using cable ties.
Note on application	Unused slots are to be sealed off prior to commissioning. Suitable sealing elements are to be found under "Accessories".

Product properties

Product type	Distributor box
Number of positions	5
Number of slots	4
Coding	A
LED	No

Electrical properties

Nominal voltage U_N	48 V AC 60 V DC
Rated current, total	10 A
Max. current carrying capacity per path	2 A
Current carrying capacity per slot	4 A

Connection data

Conductor connection	
Sensor/actuator connection system	M12-SPEEDCON-socket
Conductor cross section Flexible signal line	0.14 mm ² ... 1.5 mm ²
Conductor cross section Flexible power supply	0.14 mm ² ... 1.5 mm ²
Connection cross section AWG Flexible signal line	26 ... 16
Connection cross section AWG Flexible power supply	26 ... 16
Stripping length Signal line	7 mm
Tightening torque, cover screw	0.35 Nm
Tightening torque slot sensor/actuator cable	0.4 Nm
Tightening torque of mounting screw for fixing the housing	0.5 Nm
Tightening torque, union nut	2.5 Nm

Pin assignment

Slot/position = Wire color or connection	1 / 1 = 1 / 1
	1 / 2 = 1 / 2
	1 / 3 = 1 / 3
	1 / 4 = 1 / 4
	1 / 5 = 1 / 5
	2 / 1 = 2 / 1

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



2 / 2 = 2 / 2
2 / 3 = 2 / 3
2 / 4 = 2 / 4
2 / 5 = 2 / 5
3 / 1 = 3 / 1
3 / 2 = 3 / 2
3 / 3 = 3 / 3
3 / 4 = 3 / 4
3 / 5 = 3 / 5
4 / 1 = 4 / 1
4 / 2 = 4 / 2
4 / 3 = 4 / 3
4 / 4 = 4 / 4

Signaling

Status display present	No
------------------------	----

Dimensions

Dimensional drawing	
Width	58 mm
Height	45 mm
Length	117 mm

Material specifications

Material Threaded sleeve	Die-cast zinc
Material Housing	PBT
Material Molding compound	PUR
Flammability rating according to UL 94	V0
Seal material O-ring	NBR
Contact material	Cu alloy
Contact surface material	gold-plated
Contact carrier material	PA
Material of contact, master cable side	CU alloy
Material of the contact carrier on the master cable side	PA 6.6 V0
Material of contact surface, master cable side	gold-plated

Cable/line

External cable diameter	7 mm ... 12 mm
Connection method	Pluggable screw connection

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Environmental and real-life conditions

Ambient conditions

Degree of protection	IP65
	IP67
	IP69K
Ambient temperature (operation)	-30 °C ... 80 °C
Ambient temperature (storage/transport)	-30 °C ... 90 °C

Standards and regulations

M12

Standard designation	M12 connector
Standards/specifications	IEC 61076-2-101

SACB-4/ 8-C SCO SELECT - Distributor box


1437258

<https://www.phoenixcontact.com/us/products/1437258>




Drawings

Schematic diagram

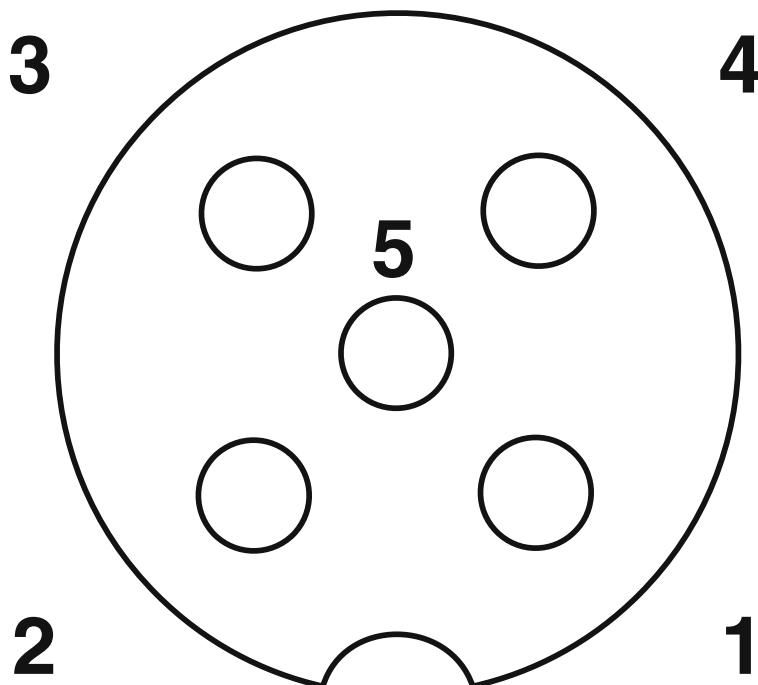

Pin assignment of M12 socket, 5-pos.

Dimensional drawing

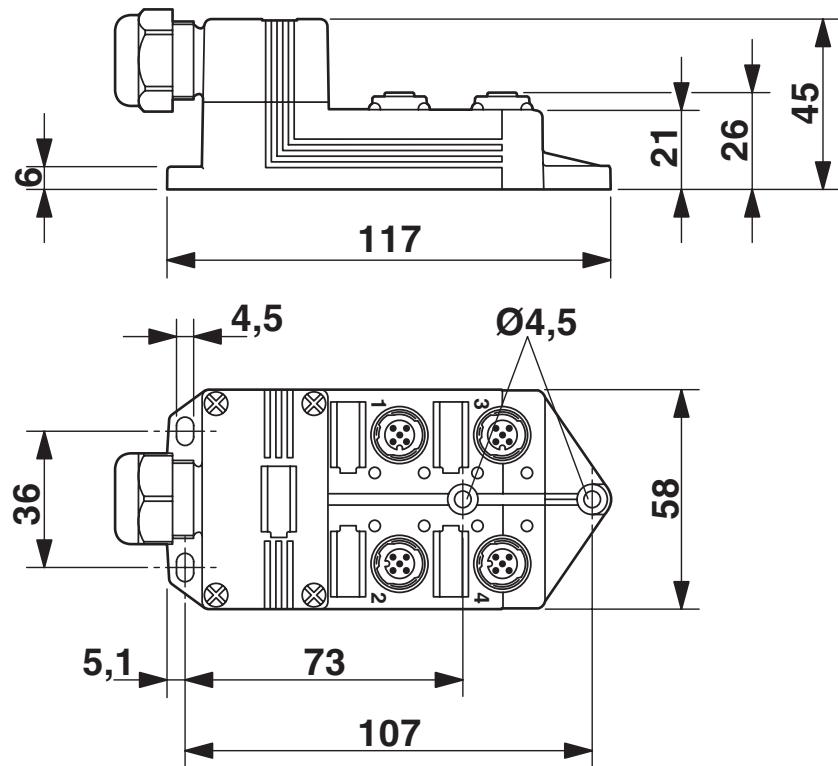


SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Circuit diagram

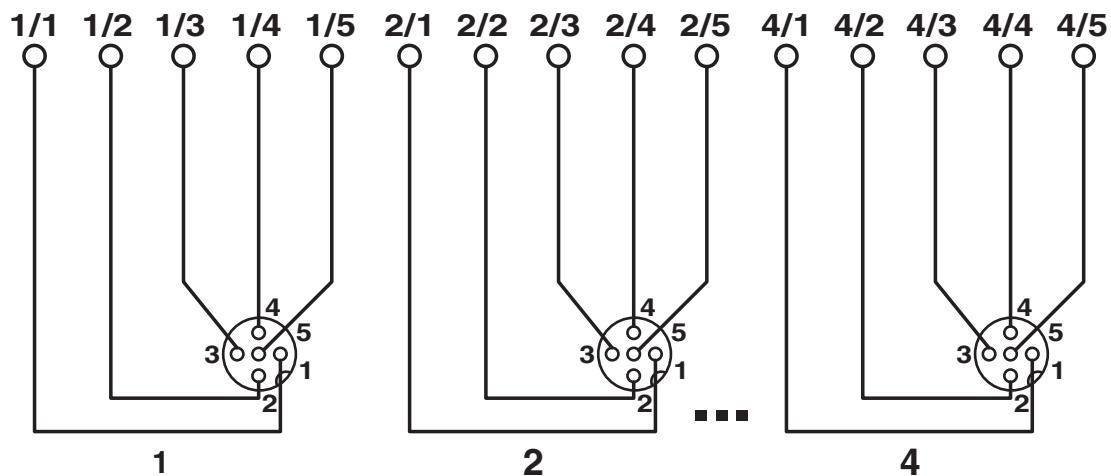

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Approvals

ⓘ To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1437258>

cUL Recognized Approval ID: File E 118976	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	4 A	-	-

UL Recognized Approval ID: File E 118976	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
	48 V	4 A	-	-

EAC Approval ID: RU C-DE.BL08.B.00511

cULus Recognized

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Classifications

ECLASS

ECLASS-11.0	27440111
ECLASS-12.0	27440111
ECLASS-13.0	27440111

ETIM

ETIM 9.0	EC003558
----------	----------

UNSPSC

UNSPSC 21.0	31251500
-------------	----------

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Environmental product compliance

EU RoHS

Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)

China RoHS

Environment friendly use period (EFUP)	EFUP-50
An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.	

EU REACH SVHC

REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	b6e9cb6b-45e9-4bbe-b868-62abb81db105

SACB-4/ 8-C SCO SELECT - Distributor box

1437258

<https://www.phoenixcontact.com/us/products/1437258>



Accessories

PROT-MS SCO - Screw plug

1553129

<https://www.phoenixcontact.com/us/products/1553129>



M12 screw plug with fast-locking system for unoccupied M12 female connectors of sensor/actuator cables, boxes, and flush-type connectors

SS-ZB WH CUS - Contactor marker - zack marker strip

0824470

<https://www.phoenixcontact.com/us/products/0824470>



Contactor marker - zack marker strip, can be ordered: Strip, white, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 20 mm, lettering field size: 20 x 8 mm

SACB-4/ 8-C SCO SELECT - Distributor box

1437258


<https://www.phoenixcontact.com/us/products/1437258>



SS-ZB YE CUS - Contactor marker - zack marker strip

0824471

<https://www.phoenixcontact.com/us/products/0824471>



Contactor marker - zack marker strip, can be ordered: Strip, yellow, labeled according to customer specifications, mounting type: snap into flat marker groove, for terminal block width: 20 mm, lettering field size: 20 x 8 mm

UC-EM (17,5X9) - Snap-in markers

0827490

<https://www.phoenixcontact.com/us/products/0827490>



Snap-in markers, Sheet, white, unlabeled, can be labeled with: BLUEMARK ID, BLUEMARK ID COLOR, BLUEMARK CLED, BLUEMARK LED, CMS-P1-PLOTTER, PLOTMARK, mounting type: snapped, lettering field size: 17.5 x 9 mm, Number of individual labels: 20

SACB-4/ 8-C SCO SELECT - Distributor box



1437258


<https://www.phoenixcontact.com/us/products/1437258>

UC-EM (17,5X9) YE - Snap-in markers

0827494

<https://www.phoenixcontact.com/us/products/0827494>

Snap-in markers, Sheet, yellow, unlabeled, can be labeled with: BLUEMARK ID COLOR, BLUEMARK ID, BLUEMARK CLED, PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, lettering field size: 17.5 x 9 mm, Number of individual labels: 20



TSD 04 SAC - Torque screwdriver

1208429

<https://www.phoenixcontact.com/us/products/1208429>

Torque screwdriver, with preset torque of 0.4 Nm and 4 mm hexagonal drive for M12 connectors



SACB-4/ 8-C SCO SELECT - Distributor box



1437258

<https://www.phoenixcontact.com/us/products/1437258>

SAC BIT M12-D15 - Tool

1208432

<https://www.phoenixcontact.com/us/products/1208432>



Nut for assembling sensor/actuator cables with M12 connector and M12 connectors for assembly, with a knurl diameter of 15 mm, for 4 mm hexagonal drive

SACC BIT M12-D20 - Tool

1208445

<https://www.phoenixcontact.com/us/products/1208445>



Nut for assembling M12 connectors for assembly with a knurl diameter of 20 mm, for 4 mm hexagonal drive

SACB-4/ 8-C SCO SELECT - Distributor box



1437258

<https://www.phoenixcontact.com/us/products/1437258>

SZK PZ1 VDE - Screwdriver

1206450

<https://www.phoenixcontact.com/us/products/1206450>

Screwdriver, PZ crosshead, VDE insulated, size: PZ 1 x 80 mm, 2-component grip, with non-slip grip



WIREFOX 4 - Stripping tool

1212156

<https://www.phoenixcontact.com/us/products/1212156>

Stripping tool, for cables and conductors (especially for rubber and silicone insulations) from 0.1 - 4 mm², self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm² stranded/1.5 mm² solid, replaceable stripping blade



Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA

586 Fulling Mill Road

Middletown, PA 17057, United States

(+717) 944-1300

info@phoenixcon.com