


CLIFF

DUAL USB-C Female-Male FEEDTHROUGH CONNECTOR

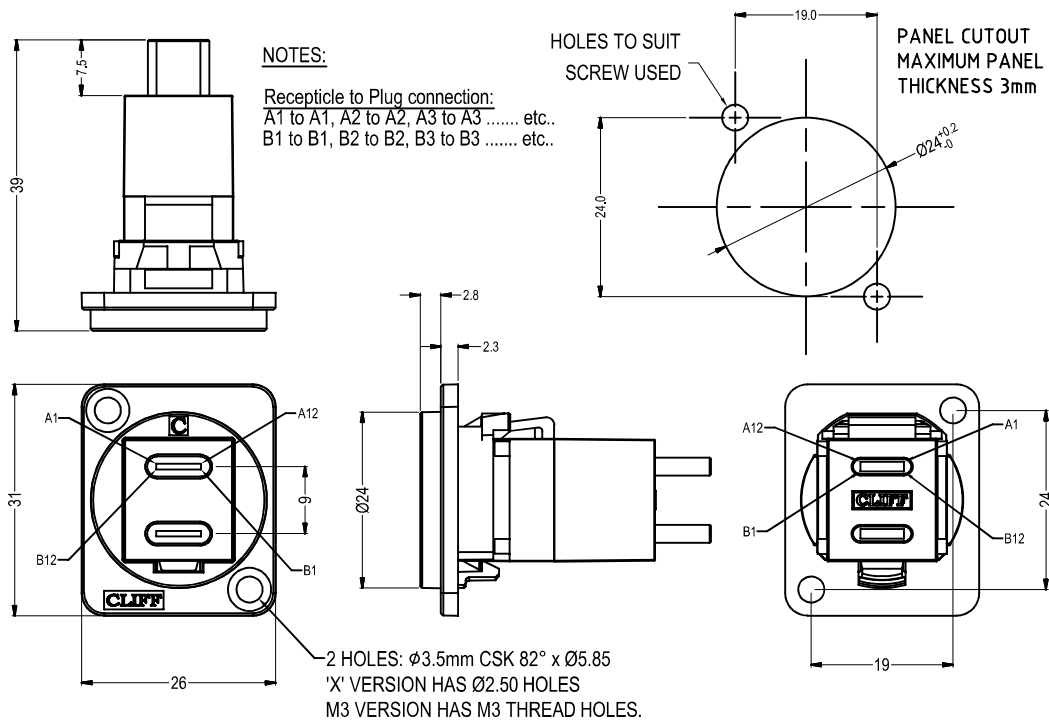

Feedthrough Features

- Fits standard XLR Ø24mm cutout.
- No soldering or punch termination. Use standard cable for each connector style.
- Front or rear mounted.
- Low rear profile

General:

Please note: Functionality is affected by cable quality, length and cable wiring configuration.

Material:

1. Insert: ABS - UL94 HB
2. Plastic Frame: Polyamide UL94 V-2
3. Metal Frame: Diecast, Black or Nickel plated

VARIANTS

Part No.

CP30212	Dual USB-C F-M Black plastic frame, CSK holes
CP30212W	Dual USB-C F-M White plastic frame, CSK holes
CP30212M	Dual USB-C F-M Nickel plated metal frame, CSK holes
CP30212M3	Dual USB-C F-M Nickel plated metal frame, M3 holes
CP30212MB	Dual USB-C F-M Black metal frame, CSK holes
CP30212M3B	Dual USB-C F-M Black metal frame, M3 holes
CP30212X	Dual USB-C F-M Black plastic frame, PLAIN holes
CP30212XW	Dual USB-C F-M White plastic frame, PLAIN holes

USB-C Specification:

Maximum Rated Current - 3A
Maximum Working Voltage - 30V
Withstanding Voltage - 100V for 1 minute.
Contact Resistance - 40 Milli-ohms Max.
Insulation Resistance - 100 Mega-ohms Min.
Insulator Flammability Rating - UL-94V0
Insertion Life - 10,000 Cycles.