


UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



VARIOFACE output module, with 32 miniature relays, 1 N/O contact each, plugged, for 24 V DC (incl. relay)

Your advantages

- Narrow design width of just 55 mm (8 channels) or 202 mm (32 channels)
- Universal applications from 1 mA to 3 A continuous current thanks to 2-layer double contact with hard gold plating
- LED status indicator per signal path and supply voltage
- Freewheeling and polarity protection diode for each signal path
- Plug-in miniature relays each with an N/O contact

Commercial data

Item number	2979472
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	C421
Product key	CK2191
Catalog page	Page 524 (C-5-2019)
GTIN	4017918130367
Weight per piece (including packing)	459 g
Weight per piece (excluding packing)	403.83 g
Customs tariff number	85364190
Country of origin	DE

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Technical data

Product properties

Product type	Interface module
No. of channels	32
Operating mode	100% operating factor
Mechanical service life	2x 10 ⁷ cycles
Compatible components	Miniature relay, REL-MR-G 24/1
With components	yes

Insulation characteristics

Overvoltage category	III
Pollution degree	2

Electrical properties

Rated insulation voltage	300 V AC
Rated surge voltage	4 kV (Basic insulation)

Supported controller SIEMENS S7-1500

Suitable I/O card	6ES7521-1BL00-0AB0
	6ES7522-1BL00-0AB0
	6ES7522-1BL01-0AB0

Supported controller SIEMENS S7-400

Suitable I/O card	6ES7422-1BL00-0AA0
	6ES7422-7BL00-0AB0

Supported controller ALLEN-BRADLEY PLC 5

Suitable I/O card	1771 OBN
-------------------	----------

Supported controller EMERSON DeltaV

Suitable I/O card	VE4002S1T2B6
-------------------	--------------

Supported controller GE-FANUC RX3i

Suitable I/O card	IC694MDL754
-------------------	-------------

Supported controller HONEYWELL Experion PKS C200

Suitable I/O card	TC-ODD 321
-------------------	------------

Supported controller MITSUBISHI MELSEC L

Suitable I/O card	LY41PT1P
	LY42PT1P

Supported controller MITSUBISHI MELSEC Q

Suitable I/O card	QY81P
	QY82P

Supported controller SCHNEIDER ELECTRIC Modicon TSX QUANTUM

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Suitable I/O card	DDO 353
Supported controller SIEMENS S7-300 / ET 200 M	
Suitable I/O card	6ES7322-1BL00-0AA0
Supported controller SIEMENS ET 200SP HA	
Suitable terminal block	6DL1193-6TP00-0BH1
	6DL1193-6TP00-0DH1
	6DL1193-6TP00-0BM1
	6DL1193-6TP00-0DM1
Suitable I/O module	6DL1131-6BL00-0PH1 (Terminal Block H1/M1)
	6DL1132-6BL00-0PH1 (Terminal Block H1/M1)

Input data

Nominal input voltage U_N	24 V DC
Input voltage range in reference to U_N	0.8 ... 1.1
Input voltage range	19.2 V DC ... 26.4 V DC
Typical input current at U_N	6.5 mA
Typical response time	5 ms
Typical release time	15 ms
Protective circuit	Freewheeling diode; Freewheeling diode
	Reverse polarity protection; Polarity protection diode
Operating voltage display	Green LED
Status display/channel	Yellow LED

Output data

Compatible components	Miniature relay, REL-MR-G 24/1
Switching	
Contact switching type	1 N/O contact
Type of switch contact	Double contact
Contact material	AgNi, 5 µm hard gold-plated
Maximum switching voltage	250 V AC
	125 V DC
Minimum switching voltage	5 V
Limiting continuous current	3 A
Maximum inrush current	5 A
Min. switching current	1 mA
Interrupting rating (ohmic load) max.	72 W (24 V DC)
	60 W (48 V DC)
	50 W (60 V DC)
	50 W (110 V DC)
	750 VA (250 V AC)
Error detection (line break / short-circuit)	no

Connection data

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Controller level

Connection method	IDC/FLK pin strip
Number of connections	1
Number of positions	50
Pitch	2.54 mm

Field level

Connection method	Screw connection
Stripping length	6 mm
Screw thread	M3
Number of connections	64
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	26 ... 16

Supply

Connection method	Screw connection
Stripping length	6 mm
Screw thread	M3
Number of connections	4
Number of positions	2
Conductor cross section rigid	0.14 mm ² ... 1.5 mm ²
Conductor cross section flexible	0.14 mm ² ... 1.5 mm ²
Conductor cross section AWG	26 ... 14

Signaling

Status display present	Yes
------------------------	-----

Dimensions

Width	202.5 mm
Height	77 mm
Depth	52.5 mm

Material specifications

Color	gray (RAL 7042)
-------	-----------------

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP00
Ambient temperature (operation)	-20 °C ... 50 °C
Ambient temperature (storage/transport)	-20 °C ... 70 °C

Standards and regulations

Standards/regulations	EN 61010-2-201
	IEC 60664

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Mounting

Mounting type	DIN rail mounting
Assembly note	in rows with zero spacing
Mounting position	any

Notes

Notes on operation	Observe the maximum switching capacity of the relays used
Notes on operation	Do not connect adjacent channels to SELV/ PELV and voltages dangerous to the touch.
Notes on operation	The outputs are not suitable for switching different line conductors. The sum of the switching voltages used for adjacent outputs must not exceed the rated insulation voltage value
Notes on operation	The necessary requirements for insulation (basic insulation or reinforced insulation) from adjacent modules (in DIN-rail direction) must be realized by applying suitable measures (e. g., partition plates).
Notes on operation	For proper use, the specifications of the installation directive (see Downloads) must be observed. For applications or use with third-party products, the specifications, and the safety and warning instructions of the respective third-party manufacturer must also be met.

UMK-32 RM/MR-G24/1/PLC - Active module


2979472

<https://www.phoenixcontact.com/us/products/2979472>




Drawings

Circuit diagram

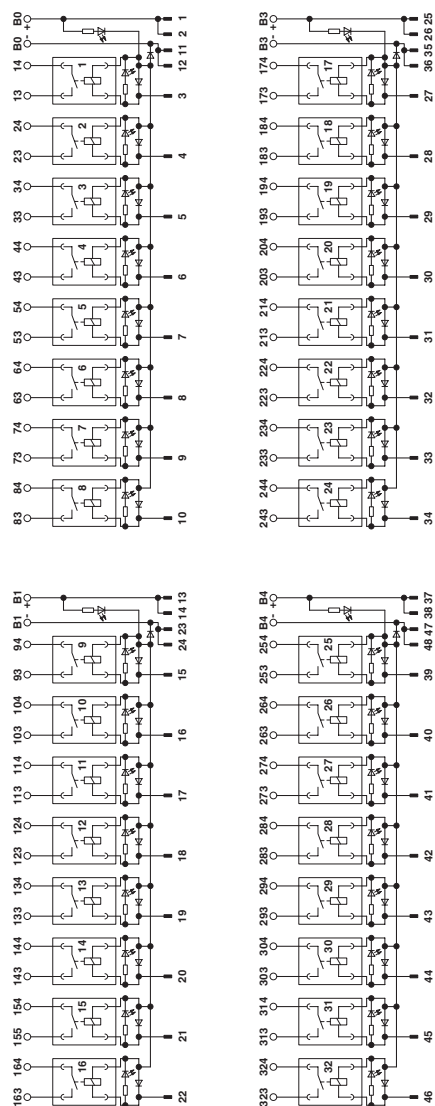


Diagram

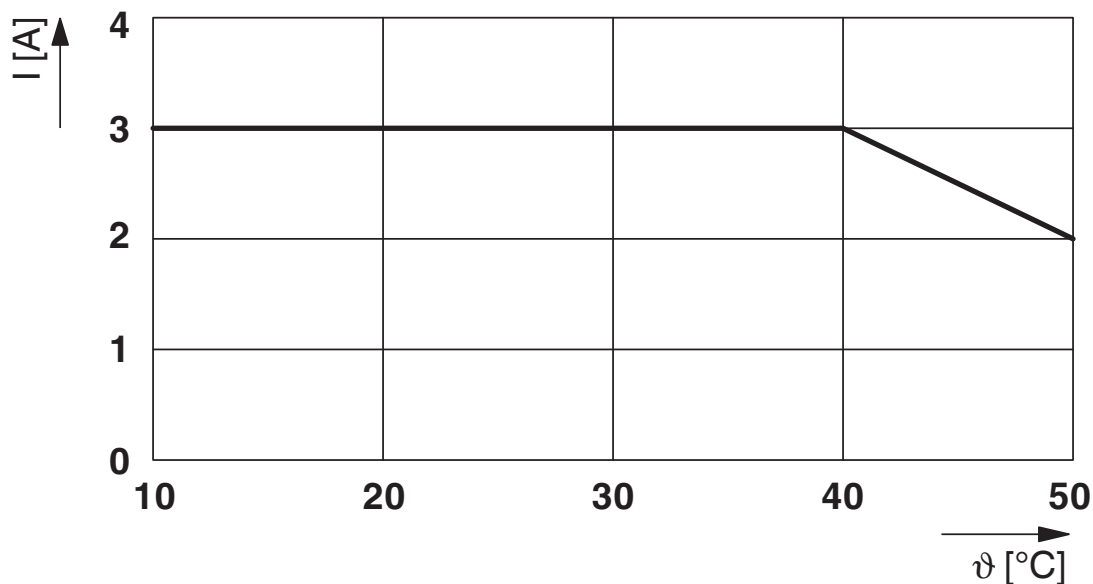

Derating curve for limiting continuous current

Circuit diagram

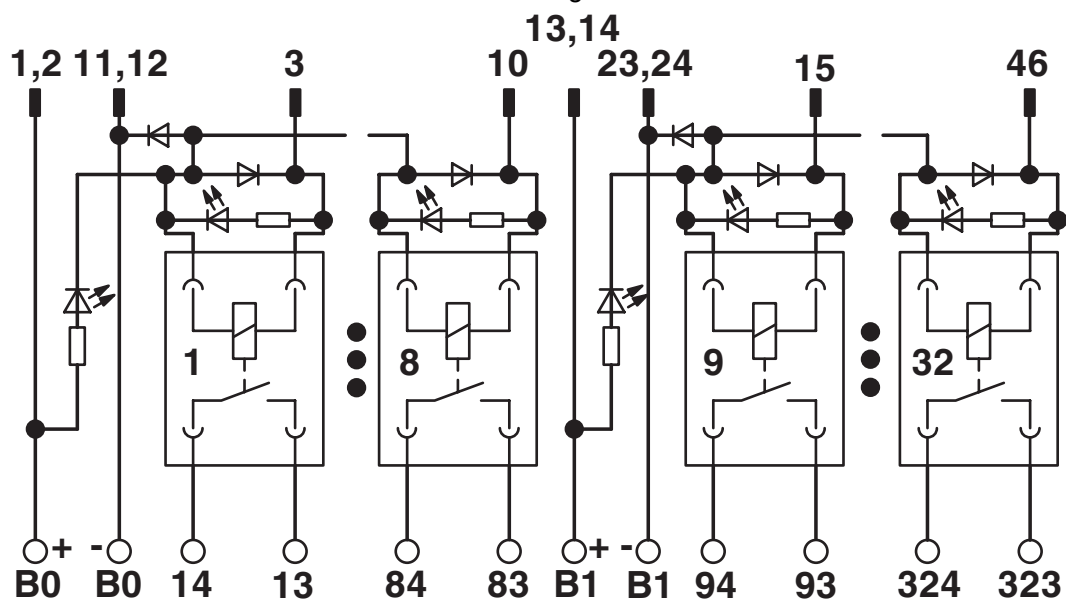

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2979472>

	cUL Recognized			
	Approval ID: FILE E 238705			
		Nominal voltage U_N	Nominal current I_N	Cross section AWG
		24 V	3 A	-
				Cross section mm ²
				-

	UL Recognized			
	Approval ID: FILE E 238705			
		Nominal voltage U_N	Nominal current I_N	Cross section AWG
		24 V	3 A	-
				Cross section mm ²
				-

	EAC
	Approval ID: RU*DE*08.B.01841/19

cULus Recognized

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

Classifications

ECLASS

ECLASS-11.0	27141152
ECLASS-12.0	27141152
ECLASS-13.0	27141152

ETIM

ETIM 9.0	EC002780
----------	----------

UNSPSC

UNSPSC 21.0	39121400
-------------	----------

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c), 7(a), 7(c)-I
China RoHS	
Environment friendly use period (EFUP)	EFUP-50
	An article-related China RoHS declaration table can be found in the download area for the respective article under "Manufacturer declaration". For all articles with EFUP-E, no China RoHS declaration table issued and required.
EU REACH SVHC	
REACH candidate substance (CAS No.)	Hexahydromethylphthalic anhydride(CAS: n/a)
	Lead(CAS: 7439-92-1)
SCIP	1075b1cd-56c1-4dc4-a6c1-a3443c2e5644

UMK-32 RM/MR-G24/1/PLC - Active module



2979472


<https://www.phoenixcontact.com/us/products/2979472>

Accessories

FLK 50/EZ-DR/ 50/KONFEK - Cable

2289065

<https://www.phoenixcontact.com/us/products/2289065>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 0.5 m

FLK 50/EZ-DR/ 100/KONFEK - Cable

2289078

<https://www.phoenixcontact.com/us/products/2289078>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 1 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 150/KONFEK - Cable

2289081

<https://www.phoenixcontact.com/us/products/2289081>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 1.5 m

FLK 50/EZ-DR/ 200/KONFEK - Cable

2289094

<https://www.phoenixcontact.com/us/products/2289094>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 2 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 250/KONFEK - Cable

2289104

<https://www.phoenixcontact.com/us/products/2289104>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 2.5 m

FLK 50/EZ-DR/ 300/KONFEK - Cable

2289117

<https://www.phoenixcontact.com/us/products/2289117>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 3 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 350/KONFEK - Cable

2289120

<https://www.phoenixcontact.com/us/products/2289120>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 3.5 m

FLK 50/EZ-DR/ 400/KONFEK - Cable

2289133

<https://www.phoenixcontact.com/us/products/2289133>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 4 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 450/KONFEK - Cable

2289573

<https://www.phoenixcontact.com/us/products/2289573>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 4.5 m

FLK 50/EZ-DR/ 500/KONFEK - Cable

2289586

<https://www.phoenixcontact.com/us/products/2289586>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 5 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 550/KONFEK - Cable

2289599

<https://www.phoenixcontact.com/us/products/2289599>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 5.5 m

FLK 50/EZ-DR/ 600/KONFEK - Cable

2289609

<https://www.phoenixcontact.com/us/products/2289609>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 6 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 700/KONFEK - Cable

2289625

<https://www.phoenixcontact.com/us/products/2289625>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 7 m

FLK 50/EZ-DR/ 750/KONFEK - Cable

2289638

<https://www.phoenixcontact.com/us/products/2289638>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 7.5 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 800/KONFEK - Cable

2289641

<https://www.phoenixcontact.com/us/products/2289641>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 8 m

FLK 50/EZ-DR/ 850/KONFEK - Cable

2289654

<https://www.phoenixcontact.com/us/products/2289654>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 8.5 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 900/KONFEK - Cable

2289667

<https://www.phoenixcontact.com/us/products/2289667>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 9 m

FLK 50/EZ-DR/1000/KONFEK - Cable

2289683

<https://www.phoenixcontact.com/us/products/2289683>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 10 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 125/KONFEK - Cable

2296197

<https://www.phoenixcontact.com/us/products/2296197>




Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 1.25 m

FLK 50/EZ-DR/1200/KONFEK - Cable

2296223

<https://www.phoenixcontact.com/us/products/2296223>



Round cable set; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 12 m

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 50/KONFEK/S - Cable

2299097

<https://www.phoenixcontact.com/us/products/2299097>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 0.5 m

FLK 50/EZ-DR/ 100/KONFEK/S - Cable

2299107

<https://www.phoenixcontact.com/us/products/2299107>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 1 m

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 150/KONFEK/S - Cable

2299110

<https://www.phoenixcontact.com/us/products/2299110>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 1.5 m

FLK 50/EZ-DR/ 200/KONFEK/S - Cable

2299123

<https://www.phoenixcontact.com/us/products/2299123>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 2 m

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 300/KONFEK/S - Cable

2299136

<https://www.phoenixcontact.com/us/products/2299136>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 3 m

FLK 50/EZ-DR/ 400/KONFEK/S - Cable

2299149

<https://www.phoenixcontact.com/us/products/2299149>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 4 m

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

FLK 50/EZ-DR/ 600/KONFEK/S - Cable

2299152

<https://www.phoenixcontact.com/us/products/2299152>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 6 m

FLK 50/EZ-DR/1000/KONFEK/S - Cable

2299178

<https://www.phoenixcontact.com/us/products/2299178>



Assembled shielded round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position) (The braided shield is routed to a separate cable end.); cable length: 10 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

CABLE-FLK50/0,14/HF/ 0,5M - Cable

2314134

<https://www.phoenixcontact.com/us/products/2314134>




Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 0.5 m

CABLE-FLK50/0,14/HF/ 1,0M - Cable

2314147

<https://www.phoenixcontact.com/us/products/2314147>



Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 1 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

CABLE-FLK50/0,14/HF/ 1,5M - Cable

2314150

<https://www.phoenixcontact.com/us/products/2314150>




Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 1.5 m

CABLE-FLK50/0,14/HF/ 2,0M - Cable

2314163

<https://www.phoenixcontact.com/us/products/2314163>



Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 2 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

CABLE-FLK50/0,14/HF/ 2,5M - Cable

2314176

<https://www.phoenixcontact.com/us/products/2314176>




Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 2.5 m

CABLE-FLK50/0,14/HF/ 3,0M - Cable

2314189

<https://www.phoenixcontact.com/us/products/2314189>



Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 3 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

CABLE-FLK50/0,14/HF/ 4,0M - Cable

2314192

<https://www.phoenixcontact.com/us/products/2314192>




Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 4 m

CABLE-FLK50/0,14/HF/ 5,0M - Cable

2314202

<https://www.phoenixcontact.com/us/products/2314202>



Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 5 m

UMK-32 RM/MR-G24/1/PLC - Active module




2979472

<https://www.phoenixcontact.com/us/products/2979472>

CABLE-FLK50/0,14/HF/10,0M - Cable

2314244

<https://www.phoenixcontact.com/us/products/2314244>




Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: 10 m

CABLE-FLK50-0,14-HF/... - Cable

2314257

<https://www.phoenixcontact.com/us/products/2314257>



Assembled, halogen-free round cable; connection 1: IDC/FLK socket strip (1x 50-position); connection 2: IDC/FLK socket strip (1x 50-position); cable length: variable

UMK-32 RM/MR-G24/1/PLC - Active module



2979472

<https://www.phoenixcontact.com/us/products/2979472>

REL-MR-G 24/1 - Single relay

2961037

<https://www.phoenixcontact.com/us/products/2961037>



Pluggable replacement miniature relay, 1 N/O contact, input voltage 24 V DC

Phoenix Contact 2024 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com