

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert module, number of positions: 2, power contacts: 2, control contacts: 0, Socket, Axial screw connection, 690 V, 40 A, 2.5 mm<sup>2</sup> ... 10 mm<sup>2</sup>, application: Power

## Commercial data

|                                      |                     |
|--------------------------------------|---------------------|
| Item number                          | 1417387             |
| Packing unit                         | 2 pc                |
| Minimum order quantity               | 2 pc                |
| Sales key                            | BF62                |
| Product key                          | BF7ACE              |
| Catalog page                         | Page 573 (C-2-2019) |
| GTIN                                 | 4055626112688       |
| Weight per piece (including packing) | 27.8 g              |
| Weight per piece (excluding packing) | 24.95 g             |
| Customs tariff number                | 85366990            |
| Country of origin                    | PL                  |

## Technical data

### Notes

|         |                                                                                                       |
|---------|-------------------------------------------------------------------------------------------------------|
| General | For HEAVYCON HC-B6 to B48 housing, snap-in module frame required, axial connection for 2 mm Allen key |
| General | Connectors may be operated only when there is no load/voltage.                                        |
| General | The axial screw connection must be established using a 2 mm Allen key (for stranded conductors only)  |

### Mounting

|                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Assembly note    | To ensure correct use, installation in housing with IP54 protection or better is required                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|                  | <b>Note regarding axial connection technology:</b><br>Only for stranded wires. The specified conductor cross sections refer to the geometric cross section of the cable used. Cables with a geometric cross section which deviates significantly from the nominal cable cross section must be checked before use.<br>The axial connection technology connection space is designed for fine strand cables according to VDE 0295 Class 5. Deviating cable structures (e.g., Class 6 cables) must be checked before use.                                                                                                                                                                                                                                                          |
|                  | <b>Assembly instructions</b><br>Before assembly, ensure that the tapered screw is fully loosened (chamber is open). Cables must not be twisted. The wires must be pushed into the contact chamber as far as they will go (until the insulation touches the contact). Hold the wires in position and tighten using an Allen key. The used wire end must be cut off before reconnection. The terminal screw must only be retightened once to prevent the litz wires from breaking. To prevent damage to the contact, the wire/cable must be mechanically held at an appropriate distance from the connection point (e.g., when used in a plate cut out). For notes on correct execution, see DIN VDE 0100-520:2003-06. Unused connections must be tightened with maximum torque. |
| Hexagonal socket | SW 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |

### Product properties

|                         |                        |
|-------------------------|------------------------|
| Product type            | Modular contact insert |
| Series                  | HC-M-02                |
| Application             | Power                  |
| Number of positions     | 2                      |
| Connection profile      | 2                      |
| Contact numbering       | 1 - 2                  |
| Number of module slots  | 1                      |
| No. of power contacts   | 2                      |
| No. of control contacts | 0                      |

### Data management status

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

|                            |     |
|----------------------------|-----|
| Article revision           | 05  |
| Insulation characteristics |     |
| Overvoltage category       | III |
| Degree of pollution        | 3   |

## Connection data

|                                  |                        |
|----------------------------------|------------------------|
| Connection technology            |                        |
| Connection technology            | Axial screw connection |
| Connection in acc. with standard | IEC / EN               |

|                                         |                                                                                                                                      |
|-----------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| Conductor connection                    |                                                                                                                                      |
| Conductor cross section                 | 2.5 mm <sup>2</sup> ... 10 mm <sup>2</sup> (The cross section specification refers to the geometric cross section of the cable used) |
| Connection cross section AWG            | 12 ... 10                                                                                                                            |
| Tightening torque                       | 1.5 Nm (2.5 mm <sup>2</sup> ... 4 mm <sup>2</sup> )                                                                                  |
|                                         | 2 Nm (6 mm <sup>2</sup> ... 10 mm <sup>2</sup> )                                                                                     |
| Stripping length of the individual wire | 9 mm (with an outside conductor diameter up to 4.8 mm)                                                                               |
|                                         | 11 mm (with an outside conductor diameter up to 6.5 mm)                                                                              |

## Dimensions

|                     |                                                                                      |
|---------------------|--------------------------------------------------------------------------------------|
| Dimensional drawing |  |
| Width               | 34.2 mm                                                                              |
| Height              | 33.5 mm                                                                              |
| Length              | 14.6 mm                                                                              |

|                            |      |
|----------------------------|------|
| Mechanical characteristics |      |
| Contact diameter           | 4 mm |

## Electrical properties

|                                |        |
|--------------------------------|--------|
| Rated voltage (III/2) contacts | 1000 V |
| Rated voltage (III/3)          | 690 V  |
| Rated surge voltage (III/2)    | 8 kV   |
| Rated surge voltage (III/3)    | 8 kV   |
| Rated surge voltage            | 8 kV   |
| Rated current                  | 40 A   |

## Mechanical properties

|                             |       |
|-----------------------------|-------|
| Mechanical data             |       |
| Insertion/withdrawal cycles | ≥ 500 |

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

## Material specifications

|                                        |                                                                                                                         |
|----------------------------------------|-------------------------------------------------------------------------------------------------------------------------|
| Flammability rating according to UL 94 | V0                                                                                                                      |
| Contact material                       | Copper alloy                                                                                                            |
| Contact surface material               | Ag                                                                                                                      |
| Contact carrier material               | PC                                                                                                                      |
| Standards/regulations                  | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |

## Environmental and real-life conditions

### Ambient conditions

|                                 |                   |
|---------------------------------|-------------------|
| Ambient temperature (operation) | -40 °C ... 125 °C |
|---------------------------------|-------------------|


## Standards and regulations

### Testing

|                       |                                                                                                                         |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------|
| Standards/regulations | PC: Fire protection in rail vehicles - requirement sets R22, R23, and R24 acc. to DIN EN 45545-2 (Risk level HL1 - HL3) |
|-----------------------|-------------------------------------------------------------------------------------------------------------------------|


## Drawings

Diagram

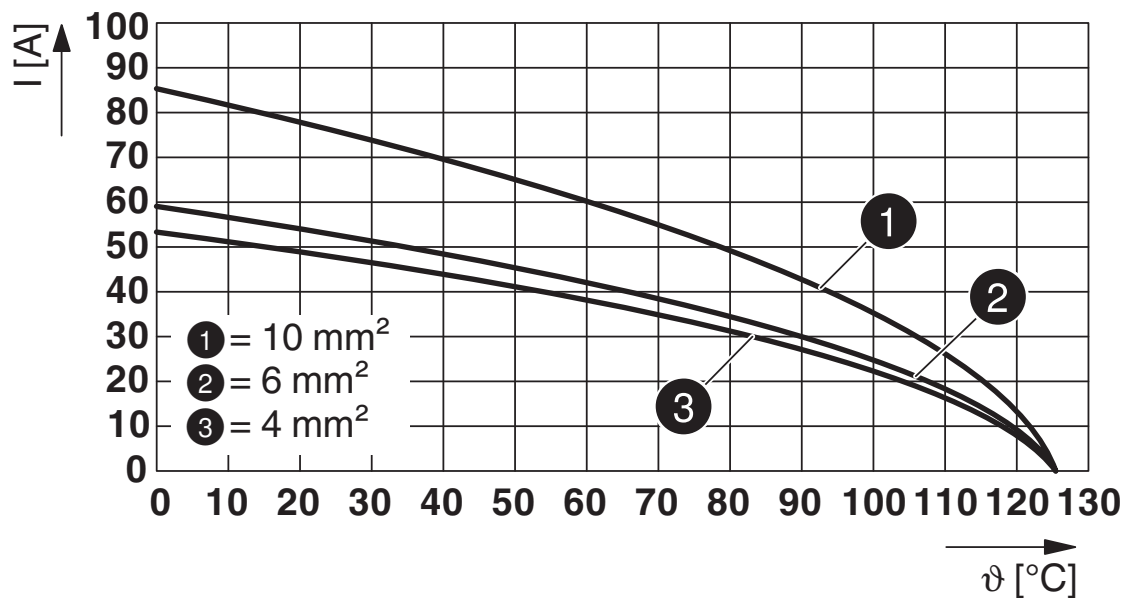

Derating diagram

Dimensional drawing

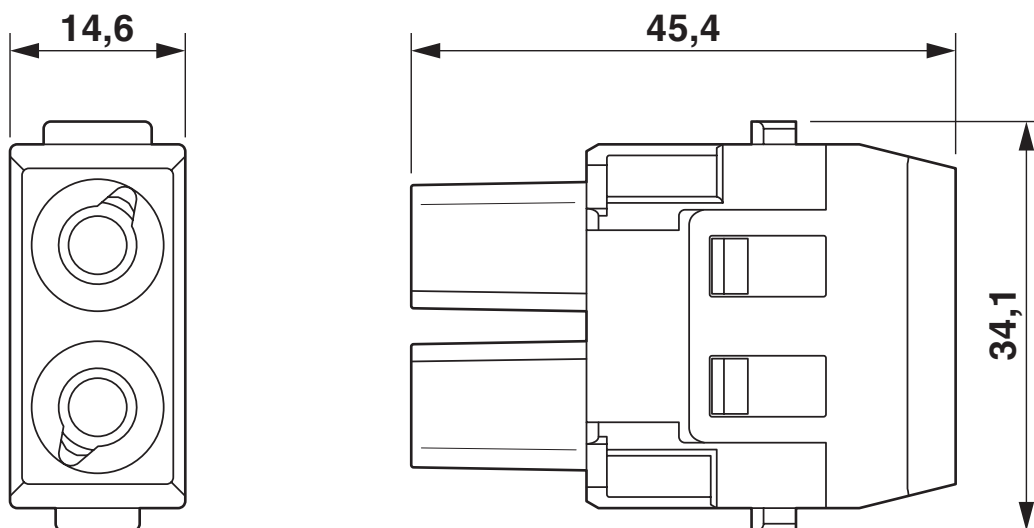

Female insert


# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

Schematic diagram

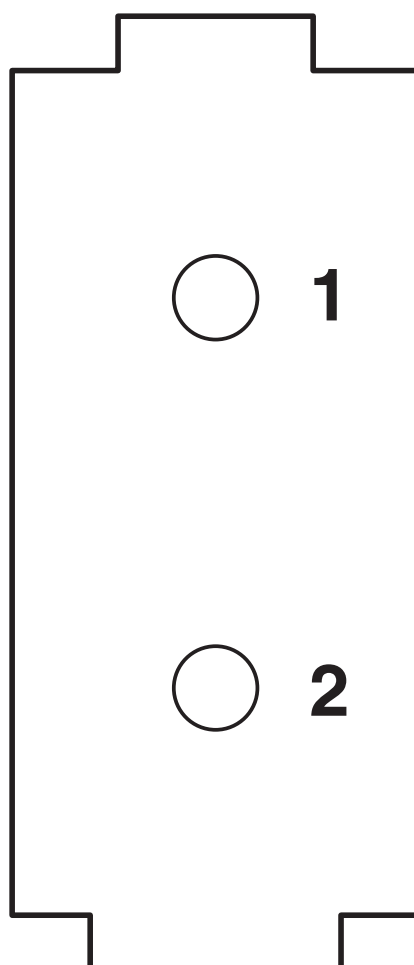


Connector pin assignment

# HC-M-02-AT-F-10 - Contact insert module

1417387

<https://www.phoenixcontact.com/us/products/1417387>

Schematic diagram

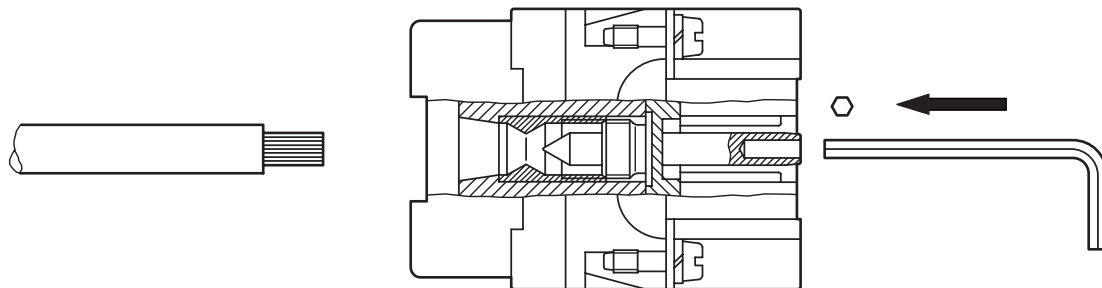

Axial connection (2 mm Allen key)

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1417387>

### DNV

Approval ID: TAE000037S



### CSA

Approval ID: 13631

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 600 V                 | 45 A                  | - 8               | -                           |



### UL Recognized

Approval ID: E118976

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 600 V                 | 55 A                  | - 8               | -                           |



### EAC

Approval ID: RU C-DE.BL08.B.00511



### UL Recognized

Approval ID: E468743

|  | Nominal voltage $U_N$ | Nominal current $I_N$ | Cross section AWG | Cross section $\text{mm}^2$ |
|--|-----------------------|-----------------------|-------------------|-----------------------------|
|  | 600 V                 | 55 A                  | -                 | -                           |

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

## Classifications

### ECLASS

|             |          |
|-------------|----------|
| ECLASS-11.0 | 27440217 |
| ECLASS-12.0 | 27440217 |
| ECLASS-13.0 | 27440217 |

### ETIM

|          |          |
|----------|----------|
| ETIM 9.0 | EC000438 |
|----------|----------|

### UNSPSC

|             |          |
|-------------|----------|
| UNSPSC 21.0 | 39121400 |
|-------------|----------|

Environmental product compliance

|                                         |                                          |
|-----------------------------------------|------------------------------------------|
| EU RoHS                                 |                                          |
| Fulfills EU RoHS substance requirements | Yes, No exemptions                       |
| China RoHS                              |                                          |
| Environment friendly use period (EFUP)  | EFUP-E                                   |
|                                         | No hazardous substances above the limits |
| EU REACH SVHC                           |                                          |
| REACH candidate substance (CAS No.)     | No substance above 0.1 wt%               |

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

## Accessories

### HC-CBU-MOD - Coding element

1636130

<https://www.phoenixcontact.com/us/products/1636130>



Coding socket for coding up to 16 connectors, for HC Modular

---

### HC-CST-MOD - Coding element

1636127

<https://www.phoenixcontact.com/us/products/1636127>



Coding peg for coding up to 16 connectors, for HC Modular

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

## HC-M-B06-MFH-B - Module carrier frame

1182085

<https://www.phoenixcontact.com/us/products/1182085>




Module carrier frame, size: B6, type : for the panel mounting side (a, b, c, ...), 4 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: Module carrier frame

---

## HC-M-B10-MFH-B - Module carrier frame

1182088

<https://www.phoenixcontact.com/us/products/1182088>



Module carrier frame, size: B10, type : for the panel mounting side (a, b, c, ...), 4 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: Module carrier frame

# HC-M-02-AT-F-10 - Contact insert module

1417387

<https://www.phoenixcontact.com/us/products/1417387>



## HC-M-B16-MFH-B - Module carrier frame

1182090

<https://www.phoenixcontact.com/us/products/1182090>

Module carrier frame, size: B16, type : for the panel mounting side (a, b, c, ...), 4 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: Module carrier frame



---

## HC-M-B24-MFH-B - Module carrier frame

1182094

<https://www.phoenixcontact.com/us/products/1182094>

Module carrier frame, size: B24, type : for the panel mounting side (a, b, c, ...), 4 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: Module carrier frame



# HC-M-02-AT-F-10 - Contact insert module

1417387

<https://www.phoenixcontact.com/us/products/1417387>



## HC-M-B06-MFH-H - Module carrier frame

1182087

<https://www.phoenixcontact.com/us/products/1182087>



Module carrier frame, size: B6, type : for the sleeve side (A, B, C, ...), 4 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: Module carrier frame

---

## HC-M-B10-MFH-H - Module carrier frame

1182089

<https://www.phoenixcontact.com/us/products/1182089>



Module carrier frame, size: B10, type : for the sleeve side (A, B, C, ...), 4 mm<sup>2</sup> ... 6 mm<sup>2</sup>, application: Module carrier frame

# HC-M-02-AT-F-10 - Contact insert module

1417387

<https://www.phoenixcontact.com/us/products/1417387>



## HC-M-B16-MFH-H - Module carrier frame

1182093

<https://www.phoenixcontact.com/us/products/1182093>

Module carrier frame, size: B16, type : for the sleeve side (A, B, C, ...), 4 mm<sup>2</sup> ...  
6 mm<sup>2</sup>, application: Module carrier frame



---

## HC-M-B24-MFH-H - Module carrier frame

1182095

<https://www.phoenixcontact.com/us/products/1182095>

Module carrier frame, size: B24, type : for the sleeve side (A, B, C, ...), 4 mm<sup>2</sup> ...  
6 mm<sup>2</sup>, application: Module carrier frame



## HC-M-02-AT-F-10 - Contact insert module

1417387

<https://www.phoenixcontact.com/us/products/1417387>



## HC-M-02-AT-M-10 - Contact insert module

1417389

<https://www.phoenixcontact.com/us/products/1417389>



Contact insert module, number of positions: 2, power contacts: 2, control contacts: 0, Pin, Axial screw connection, 690 V, 40 A, 2.5 mm<sup>2</sup> ... 10 mm<sup>2</sup>, application: Power

---

## SF-BIT-HEX 2-89 S - Screw insert

1200300

<https://www.phoenixcontact.com/us/products/1200300>



Screw bit, hexagon, E6.3-1/4" drive, size: Hex 2 x 89 mm, hardened, suitable for holder according to DIN 3126-F6.3/ISO 1173

# HC-M-02-AT-F-10 - Contact insert module



1417387

<https://www.phoenixcontact.com/us/products/1417387>

## TSD-M 3NM - Torque screwdriver

1212225

<https://www.phoenixcontact.com/us/products/1212225>



Torque screw driver, accuracy as per EN ISO 6789 standard, adjustable from 1.2 - 3 Nm

---

## SF-THEX 2-100 - Screwdriver

1212637

<https://www.phoenixcontact.com/us/products/1212637>



T-handle screwdriver, for Allen screws, hexagonal (with chamfer), size: hex 2 x 100 mm, ergonomically shaped handle, matt chrome-plated

---

Phoenix Contact 2024 © - all rights reserved  
<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)