


HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Contact insert, number of positions: 4+8+2PE, size: B24, power contacts: 4, control contacts: 8, Socket, Screw connection, 400 V, 80 A, 1.5 mm² ... 16 mm²

Your advantages

- Shock and vibration-resistant in accordance with DIN EN 61373

Commercial data

Item number	1679320
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	BF61
Product key	BF7ABA
Catalog page	Page 565 (C-2-2019)
GTIN	4017918163563
Weight per piece (including packing)	148.5 g
Weight per piece (excluding packing)	148.5 g
Customs tariff number	85366990
Country of origin	CN

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Technical data

Notes

General	For housing HC-B24
General	Connectors may be operated only when there is no load/voltage.

Mounting

Assembly note	To ensure correct use, installation in housing with IP54 protection or better is required
	Use wire end protection (screw connections do not have wire protection)

Product properties

Product type	Contact insert with a fixed no. of positions
Series	HC-K
Type	B24
	B48
Number of positions	12
Connection profile	4+8+2PE
Contact numbering	1 - 4 (power contacts)
	1 - 8 (control contacts)
No. of power contacts	4
No. of control contacts	8
Contact material type	turned
Screwdriver blade	0.8 x 4.5 mm (power contacts)


Data management status

Article revision	04
------------------	----

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Dimensions

Dimensional drawing	
Width	34 mm
Height	44.2 mm
Length	111 mm
Drill hole distance, horizontal	104 mm

Mechanical characteristics

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Contact diameter	6 mm
------------------	------

Connection data

Connection technology

Connection technology	Screw connection (power contacts)
	Screw connection (control contacts)

Conductor connection

Conductor cross section	1.5 mm ² ... 16 mm ² (power contacts)
	0.5 mm ² ... 2.5 mm ² (control contacts)
Connection cross section AWG	16 ... 6 (power contacts)
	20 ... 14 (control contacts)
Tightening torque	0.8 Nm ... 1.2 Nm (PE connection)
	0.5 Nm ... 0.8 Nm (Mounting screws for mounting in the HEAVYCON housing)
	2 Nm (Power contact, 2.5 mm ²)
	3 Nm (Power contact, 4 ... 16 mm ²)
	1.2 Nm (Power contact, 1.5 mm ²)
	0.5 Nm (control contacts)
Stripping length of the individual wire	14 mm (Power)
	7 mm (Signal)

Electrical properties

Rated voltage (III/3)	400 V (power contacts)
	400 V (control contacts)
Rated surge voltage	6 kV (power contacts)
	6 kV (control contacts)
Rated current	80 A (power contacts)
	16 A (control contacts)

Mechanical properties

Mechanical data

Insertion/withdrawal cycles	≥ 500
-----------------------------	-------

Material specifications

Flammability rating according to UL 94	V0
Contact material	Copper alloy
Contact surface material	Ag (alternatively Au)
Contact carrier material	PA
Material of contact surface, power contact	Ag
Material of contact surface, control contact	Ag
Standards/regulations	PC: Fire protection in rail vehicles - requirement set R22 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)
	PC: Fire protection in rail vehicles - requirement set R23 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Environmental and real-life conditions

Ambient conditions

Ambient temperature (operation)	-40 °C ... 125 °C
---------------------------------	-------------------

Standards and regulations

Testing

Standards/regulations	PC: Fire protection in rail vehicles - requirement set R22 acc. to DIN EN 45545-2 (Risk level HL1 - HL2)
	PC: Fire protection in rail vehicles - requirement set R23 acc. to DIN EN 45545-2 (Risk level HL1 - HL3)

HC-K 4/8-EBUS - Contact insert


1679320

<https://www.phoenixcontact.com/us/products/1679320>



Drawings

Dimensional drawing

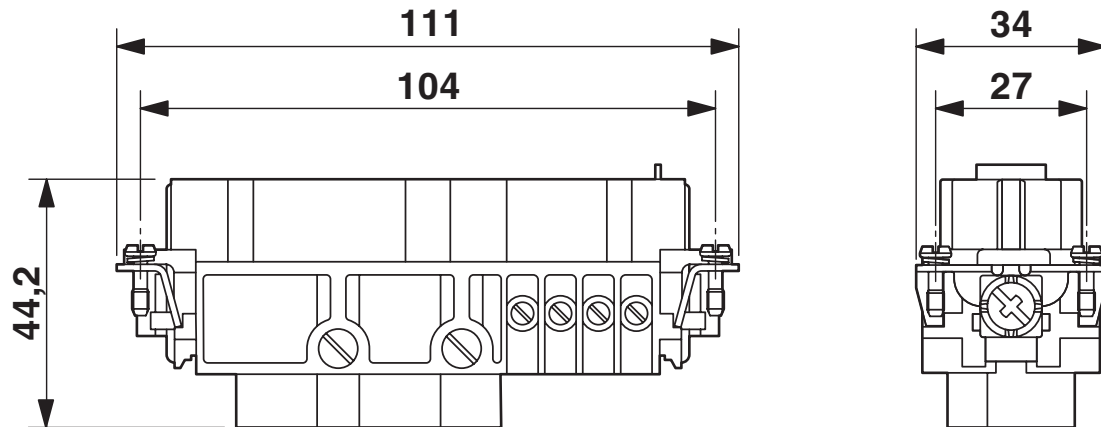

Female insert


HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Schematic diagram

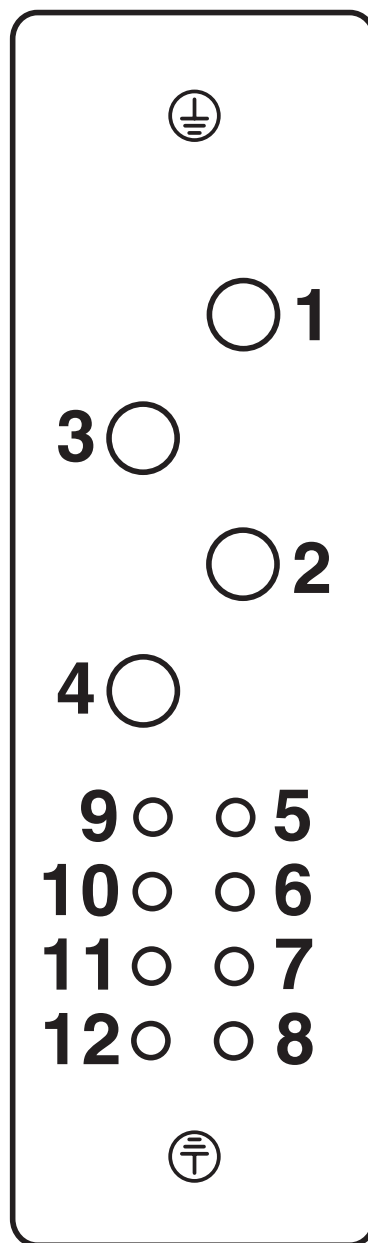

Connector pin assignment, connection side


HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>




Dimensional drawing

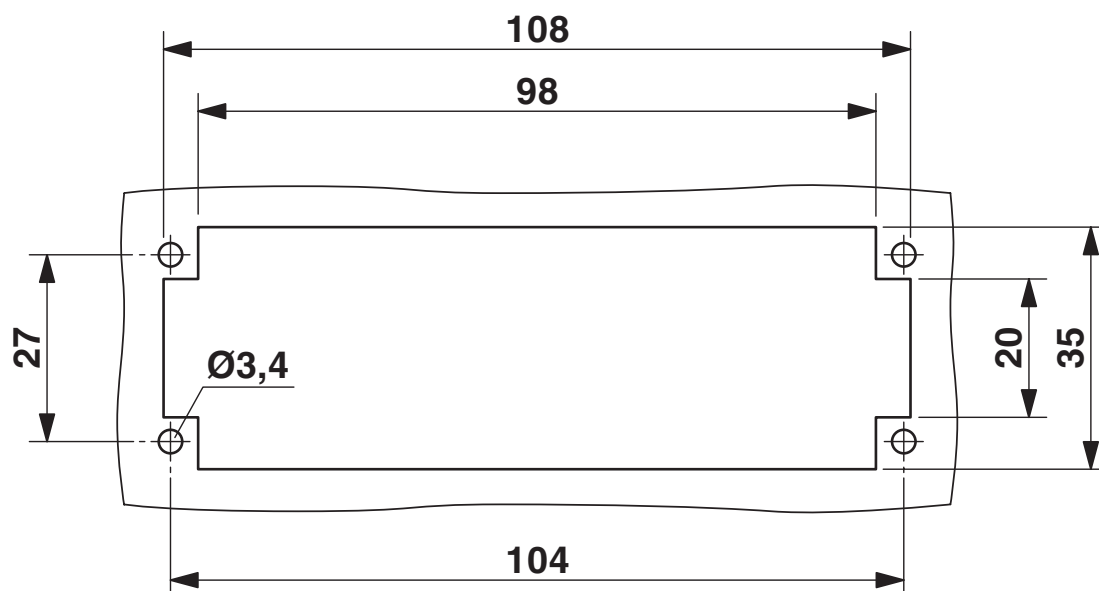

Mounting cutout when used without housing

Diagram

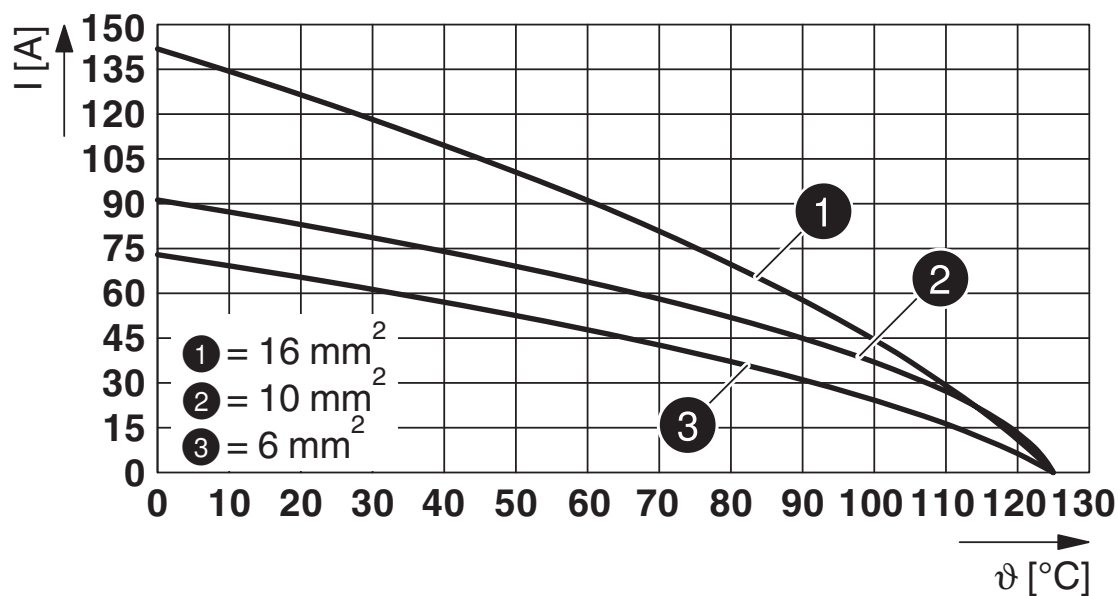

Derating diagram

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1679320>

 UL Recognized Approval ID: E118976				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Power	600 V	80 A	- 6	-
Control	600 V	16 A	14	-

 EAC Approval ID: RU C-DE.BL08.B.00511				
---	--	--	--	--

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Classifications

ECLASS

ECLASS-11.0	27440205
ECLASS-12.0	27440205
ECLASS-13.0	27440205

ETIM

ETIM 9.0	EC000438
----------	----------

UNSPSC

UNSPSC 21.0	39121500
-------------	----------

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes
Exemption	6(c)
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	Lead(CAS: 7439-92-1)
SCIP	3a677db2-7446-4aa1-be3c-731b60fb70e6

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



Accessories

HC-CB - Coding bolt

1772722

<https://www.phoenixcontact.com/us/products/1772722>



Coding pin, prevents mismating of up to six connectors with an identical number of positions

HC-CST - Coding element

1676857

<https://www.phoenixcontact.com/us/products/1676857>



Coding peg for coding up to 16 connectors

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



HC-CBU - Coding element

1676860

<https://www.phoenixcontact.com/us/products/1676860>



Coding socket for coding up to 16 connectors

HC-K 4/8-ESTS - Contact insert

1679333

<https://www.phoenixcontact.com/us/products/1679333>



Contact insert, number of positions: 4+8+2PE, size: B24, power contacts: 4, control contacts: 8, Pin, Screw connection, 400 V, 80 A, 1.5 mm² ... 16 mm²

HC-K 4/8-EBUS - Contact insert

1679320

<https://www.phoenixcontact.com/us/products/1679320>



SZF 2-0,8X4,0 - Screwdriver

1204520

<https://www.phoenixcontact.com/us/products/1204520>



Actuation tool, for ST terminal blocks, also suitable for use as a bladed screwdriver, size: 0.8 x 4.0 x 100 mm, 2-component grip, with non-slip grip

SF-SL 0,6X3,5-100 S-VDE - Screwdriver

1212587

<https://www.phoenixcontact.com/us/products/1212587>



Actuation tool, for ST terminal blocks, VDE insulated, with slimmer insulation integrated in the blade, also suitable for use as a bladed screwdriver, size: 0.6 x 3.5 x 100 mm, 2-component grip, with non-slip grip

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com