



### BAS16T/BAW56T/BAV70T/BAV99T

#### SURFACE MOUNT FAST SWITCHING DIODE

### **Features**

- Ultra-Small Surface Mount Package
- Fast Switching Speed
- For General Purpose Switching Applications
- High Conductance
- Totally Lead-Free & Fully RoHS Compliant (Notes 1 & 2)
- Halogen and Antimony Free. "Green" Device (Note 3)
- The Q BAV99TQ suitable for automotive applications requiring specific change control; this part is AEC-Q101 qualified, PPAP capable, and manufactured in IATF 16949 certified facilities.

https://www.diodes.com/quality/product-definitions/

This part is qualified to JEDEC standards (as referenced in AEC-Q) for High Reliability.

https://www.diodes.com/quality/product-definitions/

## **Mechanical Data**

- Case: SOT-523
- Case Material: Molded Plastic, "Green" Molding Compound; UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020
- Terminals: Matte Tin Finish Annealed over Alloy 42 Leadframe (Lead-Free Plating); Solderable per MIL-STD-202, Method 208 📢
- Polarity: See Diagrams Below
- Weight: 0.002 grams (Approximate)


SOT-523








BAS16T Marking: A2



**BAV70T Marking: JJ** 




# Ordering Information (Note 4)

Part Number	Compliance	Case	Packaging
BAS16T-7-F	Standard	SOT523	3000/Tape & Reel
BAW56T-7-F	Standard	SOT523	3000/Tape & Reel
BAV70T-7-F	Standard	SOT523	3000/Tape & Reel
BAV99T-7-F	Standard	SOT523	3000/Tape & Reel
BAV99T-13-F	Standard	SOT523	10,000/Tape & Reel
BAV99TQ-13-F	Automotive	SOT523	10,000/Tape & Reel

Notes:

- 1. No purposely added lead. Fully EU Directive 2002/95/EC (RoHS), 2011/65/EU (RoHS 2) & 2015/863/EU (RoHS 3) compliant.
- 2. See https://www.diodes.com/quality/lead-free/ for more information about Diodes Incorporated's definitions of Halogen- and Antimony-free, "Green" and Lead-free.
- 3. Halogen- and Antimony-free "Green" products are defined as those which contain <900ppm bromine, <900ppm chlorine (<1500ppm total Br + Cl) and <1000ppm antimony compounds.
- 4. For packaging details, go to our website at http://www.diodes.com/products/packages.html.

# **Marking Information**



XX = Product Type Marking Code (See this page, e.g. A2 = BAS16T)

YM = Date Code Marking Y = Year (ex: H = 2020)

M = Month (ex: 9 = September)

Date Code Key

Date Code Rey												
Year	2002	2003	2004		. 20	20 2	021	2022	2023	2024	2025	2026
Code	N	Р	R		.	l	I	J	K	L	М	N
	_					_						
Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	0	N	D



# Maximum Ratings (@T<sub>A</sub> = +25°C unless otherwise specified.)

Characteristic		Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage		V <sub>RRM</sub> V <sub>RWM</sub> V <sub>R</sub>	85	V
RMS Reverse Voltage		V <sub>R(RMS)</sub>	60	V
Forward Continuous Current (Note 5)	Single Diode Double Diode	I <sub>FM</sub>	155 75	mA
Repetitive Peak Forward Current		I <sub>FRM</sub>	500	mA
Non-Repetitive Peak Forward Surge Current	@ t = 1.0µs @ t = 1.0ms @ t = 1.0s	I <sub>FSM</sub>	4.0 1.0 0.5	А

## **Thermal Characteristics**

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 5)	$P_{D}$	150	mW
Thermal Resistance Junction to Ambient (Note 5)	$R_{ heta JA}$	833	°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-65 to +150	°C

# Electrical Characteristics (@T<sub>A</sub> = +25°C unless otherwise specified.)

Characteristic	Symbol	Min	Тур	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 6)	$V_{(BR)R}$	85		_	V	$I_R = 100 \mu A$
Forward Voltage	V <sub>F</sub>	_	l	0.715 0.855 1.0 1.25	V	I <sub>F</sub> = 1.0mA I <sub>F</sub> = 10mA I <sub>F</sub> = 50mA I <sub>F</sub> = 150mA
Leakage Current (Note 6)	I <sub>R</sub>	_		2.0 100 60 30	μА	$V_R = 75V$ $V_R = 75V$ , $T_J = +150$ °C $V_R = 25V$ , $T_J = +150$ °C $V_R = 25V$
Total Capacitance	C <sub>T</sub>	_	1.5	_	pF	$V_R = 0$ , $f = 1.0MHz$
Reverse Recovery Time	t <sub>rr</sub>	_	_	4.0	ns	$I_F = I_R = 10 \text{mA},$ $I_{rr} = 0.1 \times I_R, R_L = 100 \Omega$


Notes:


<sup>5.</sup> Device mounted on FR-4 PC board with recommended pad layout, which can be found on our website at https:// www.diodes.com/package-outlines.html.


<sup>6.</sup> Short duration pulse test used to minimize self-heating effect.










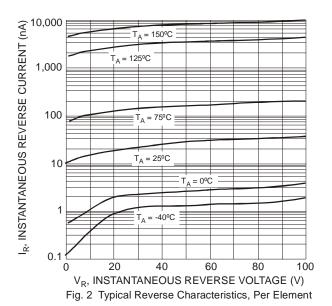






# **Package Outline Dimensions**

Please see http://www.diodes.com/package-outlines.html for the latest version.

### **SOT523**

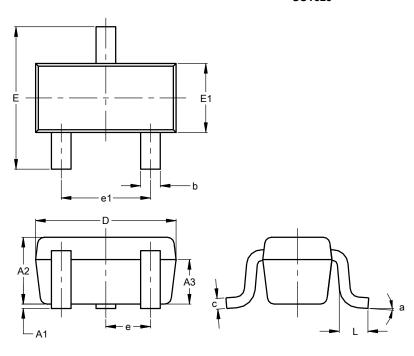


SOT523						
Dim	Min	Max	Тур			
A1	0.00	0.10	0.05			
A2	0.60	0.80	0.75			
A3	0.45	0.65	0.50			
b	0.15	0.30	0.22			
С	0.10	0.20	0.12			
D	1.50	1.70	1.60			
E	1.45	1.75	1.60			
E1	0.75	0.85	0.80			
е	e 0.50 BSC					
e1	0.90	1.10	1.00			
L	0.20	0.40	0.33			
а	0°		8°			
All Dimensions in mm						

# Suggested Pad Layout

Please see http://www.diodes.com/package-outlines.html for the latest version.

### SOT523



Dimensions	Value (in mm)			
С	1.29			
Х	0.40			
X1	0.70			
Y	0.51			
Y1	1.80			

### BAS16T/BAW56T/BAV70T/BAV99T



### **IMPORTANT NOTICE**

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

### **LIFE SUPPORT**

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

- A. Life support devices or systems are devices or systems which:
  - 1. are intended to implant into the body, or
  - 2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.
- B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2020, Diodes Incorporated

www.diodes.com