
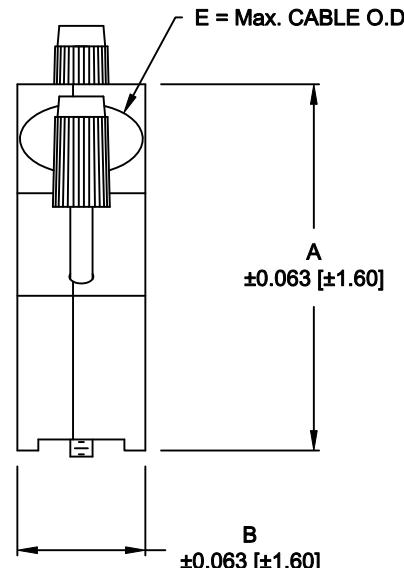


DESCRIPTION: 35° ENTRY - DIE CAST

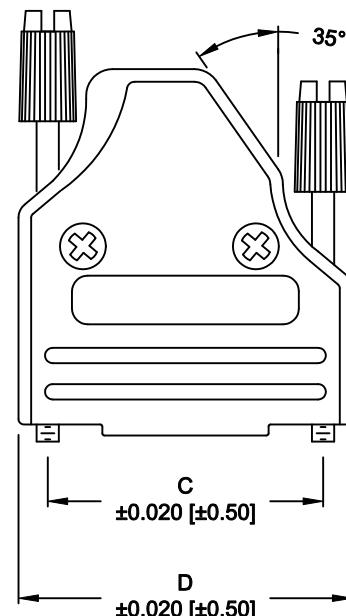

DIMENSIONS (IN.)					
No. OF PINS	A	B	C	D	E
09	1.693	0.610	0.984	1.260	0.512
	43.00	15.50	24.99	32.00	13.00
15	1.693	0.610	1.312	1.591	0.512
	43.00	15.50	33.32	40.40	13.00
25	1.890	0.610	1.852	2.126	0.512
	48.00	15.50	47.04	54.00	13.00
37	2.087	0.610	2.500	2.776	0.512
	53.00	15.50	63.50	70.50	13.00

SPECIFICATION:

MATERIAL: ZINC, NICKEL PLATED,
COPPER UNDER PLATE

OPERATING TEMPERATURE: -40°C TO +120°C

BACKSHELL KIT INCLUDES:

- (2) BACKSHELL HALVES
- (2) STRAIN RELIEF CLAMPS
- (2) STRAIN RELIEF SCREWS
- (2) MOUNTING SCREWS
- (2) THUMBSCREWS ***(SEE NOTE)***
- (3-SETS) METALIZED PLASTIC INSERTS

NOTE:

- 9-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
- 15-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
- 1 SHORT THUMBSCREW WITH METAL CAP
- 25-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
- 1 SHORT THUMBSCREW WITH PLASTIC CAP
- 37-POSITION - 1 LONG THUMBSCREW WITH PLASTIC CAP
- 1 SHORT THUMBSCREW WITH PLASTIC CAP

953-YYY-030R121

SERIES _____
 POSITIONS _____
 009
 015
 025
 037
 MATERIAL _____
 030 = DIE CAST (NICKEL)
 RoHS COMPLIANT _____
 R = HIGH TEMP. PROCESS
 COLOR _____
 12 = NICKEL OVER COPPER
 PUT-UP _____
 1 = KIT

DO NOT SCALE FROM DRAWING



THESE DRAWINGS AND SPECIFICATIONS ARE
THE PROPERTY OF NorComp AND SHALL NOT
BE REPRODUCED, COPIED OR USED AS THE
BASIS FOR THE MANUFACTURE OF SALE OF
APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH DATE: 03-26-07

CHECKED: DATE:

SCALE: 1 : 1 SHEET OF 1 1 REV 2

DWG NO. 953-YYY-030R121

NorComp

RoHS COMPLIANT