



Terminals & Splices > Automotive Terminals > GET .64 CONNECTOR SYSTEM, RECEPT AND TAB



Terminal Type: **Receptacle**

Mating Tab Width: **1 mm [.039 in]**

Mating Tab Thickness: **.64 mm [.025 in]**

Terminal Transmits: **0 - 24 A (Low Power)**

Wire Size: **24 - 22 AWG**

[All GET .64 Connector System, Recept and Tab \(28\)](#)

Features

Product Type Features

Receptacle Style	180°
Sealable	No
Primary Locking Feature	Clean Body

Contact Features

Contact Size	.64mm
Contact Fabrication	Stamped & Formed
Wire Contact Termination Area Plating Material	Tin
Typical Current Rating	9 A
Crimp Type	F-Crimp
Terminal Type	Receptacle
Mating Tab Width	1 mm[.039 in]
Mating Tab Thickness	.64 mm[.025 in]
Interface Plating	Tin (Sn)

Termination Features

Termination Method to Wire & Cable	Crimp
Product Terminates To	Wire



Dimensions

Compatible Insulation Diameter Range	1.2 - 1.4 mm[.043 - .065 in]
Wire Size	.22 - .35 mm ²
Wire Size Search	22 AWG, 23 AWG, 24 AWG

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature (Max)	80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]
Operating Temperature Range	-40 - 125 °C[-40 - 257 °F]

Operation/Application

Compatible With Wire Base Material	Copper
------------------------------------	--------

Packaging Features

Packaging Quantity	10000
Packaging Method	Reel

Other

Terminal Transmits	0 - 24 A (Low Power)
--------------------	----------------------

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JAN 2024 (240) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent



chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

TE Part # CAT-G3353-CH8172 GET .64 CONNECTOR SYSTEM, CONNECTOR HSG	TE Part # 1-1419168-1 MARKET 1X6 FEMALE SEALED	TE Part # 1-1419158-6 GET MALE TERM, A, SN, REREEL	TE Part # 2278398-1 3WAY GET 0.64 SEAL PLUG
TE Part # 2151540-1 OCEAN_2.0_APPLICATOR-S-055F070O-RSM	TE Part # 1411001-6 SEALED HARN ASSY W CPA KEY B	TE Part # 2203663-6 2X9 SEALED PLUG ASSY KEY B	TE Part # 1924639-2 1X8 FEMALE ASSY KEY D, LP LATC
TE Part # 2272431-3 1X6 GET UNSLD SIDE LATCH PLUG, KEY C	TE Part # 1452842-3 22 POS FEMALE HSG ASSY	TE Part # 1411001-7 2x4 SEALED HARN ASSY W/O CPA	TE Part # 2151540-2 OCEAN_2.0_APPLICATOR-S-055F070O-RSA
TE Part # 2272006-1 Plug Assembly, 20P GET, w/o CPA	TE Part # 2272431-4 1X6 GET UNSLD SIDE LATCH PLUG, KEY D	TE Part # 2305570-1 Strip Terminal Cutter-Side Feed-No Crimp	TE Part # 2382775-2 SDE F GET PIN/SCKT 0.35-0.22mm2 DIE SET



TE Part # 5-1419168-9
2X8 SEALD HARN ASSY W/CPA



TE Part # 7-2151540-1
OCEAN_2.0_APPLICATOR-S-055F0700



TE Part # 7-2151540-7
OCEAN_2.0_SPARE_PART_KIT-055F0700



TE Part # 2382775-1
SDE F GET PIN / SOCKET 0.35-0.22 mm2 ASSY


Also in the Series | Get .64 Connector System



Automotive Connector Caps & Covers (7)




Automotive Housings(215)

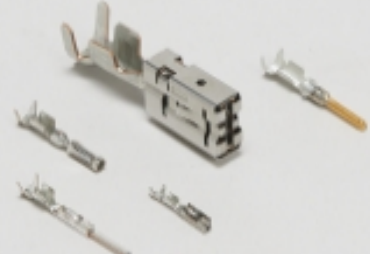

Automotive Terminals(32)




Insertion & Extraction Tools(1)

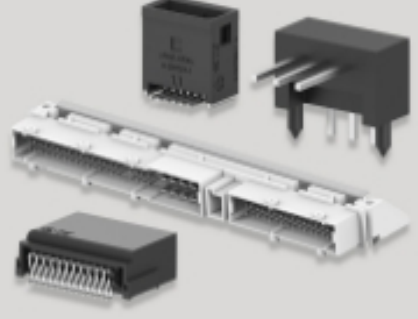

PCB Headers & Receptacles(3)

Customers Also Bought

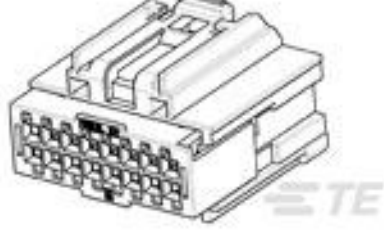

TE Part # 1456867-3
PLG ASSY,2X8,UNSEALD, 0.64,Gen



TE Part # 1438299-4
GET .64 CONNECTOR SYSTEM, RECEPT AND TAB



TE Part # 1703727-1
2POS,JPT,HOUSING,ASSY,BK



TE Part # 2035363-2
1X6 GENERATION Y ASSY KEYB CPA



TE Part # 1-2208021-3
22POS,0.64 GENER. Y,REC HSG,ASSY




TE Part # 1-2294261-1
6POS, MCON 1.2 LL REC SEALED



TE Part # 5-1719105-1
14POS,JPT,REC.HSG,BK



TE Part # 2385514-1
2POS,HC-STAK 35,HDR OUTER HSG ASSY,COD A

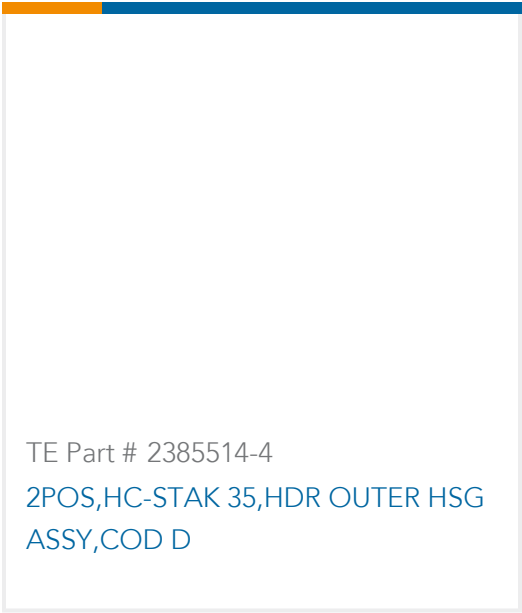

Documents

Product Drawings

V23540X7000Y 11=GET-FEM TERM S

English

V23540X7000Y 11=GET-FEM TERM S

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1393367-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1393367-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1393367-1_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.

Datasheets & Catalog Pages

GET 0.64 Interconnection System

English

Product Specifications

Application Specification

English

Application Specification

English

Application Specification

German

Instruction Sheets

UNSEALED GET/MCP 81/40 SLIDER LEVER TYPE CONNECTOR

Japanese

Instruction Sheet (non U.S.)

1393367-1

Automotive Terminals, Receptacle, Mating Tab Width 1 mm [.039 in], Tab Thickness .64 mm [.025 in], 24 - 22 AWG Wire Size, Get .64 Connector System



Japanese