




Length

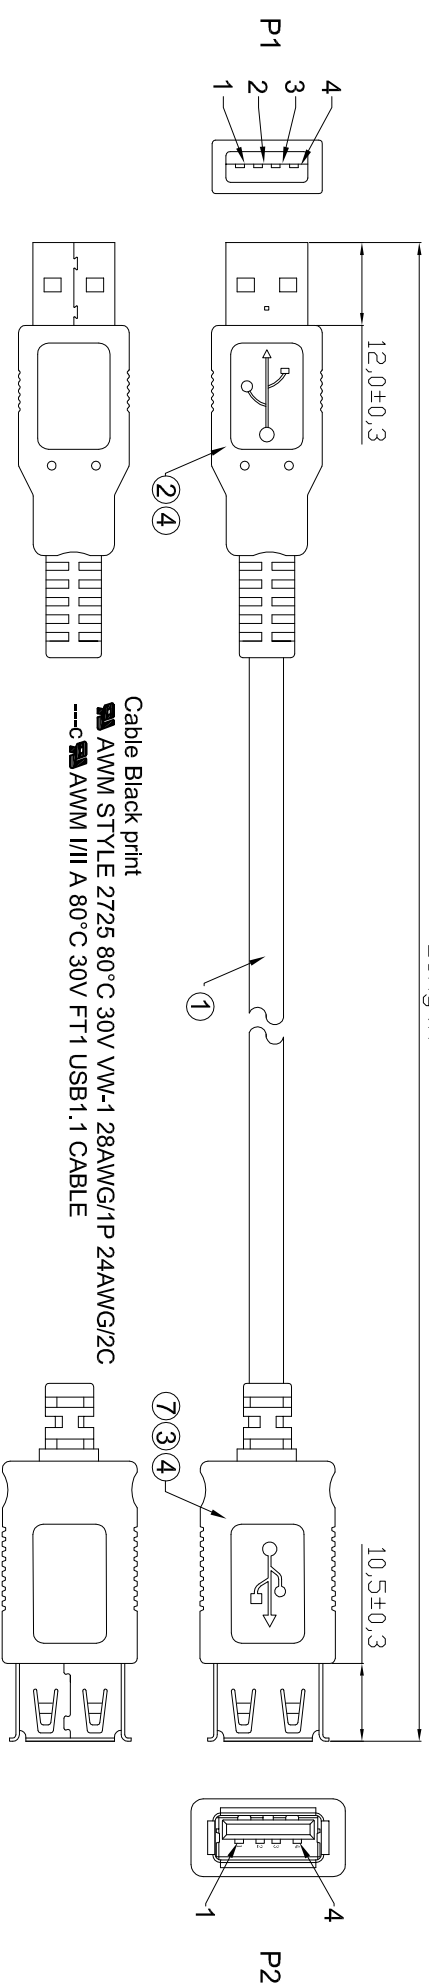

Cable Black print
AWM STYLE 2725 80°C 30V VW-1 28AWG/1P 24AWG/2C
AWM I/II A 80°C 30V FT1 USB1.1 CABLE

WSW P/N	Jacket color	Length(mm)
AK669-18	Beige	1800±50
AK669-30	Beige	3000±50
AK669-50	Beige	5000±50

- Electrical test:**
1. 100% short, open, miss wire test
 2. Conduct resistance: 2 Ohm max.
 3. Insulator resistance: 5Mohm min.
 4. Dielectric test: DC 300V

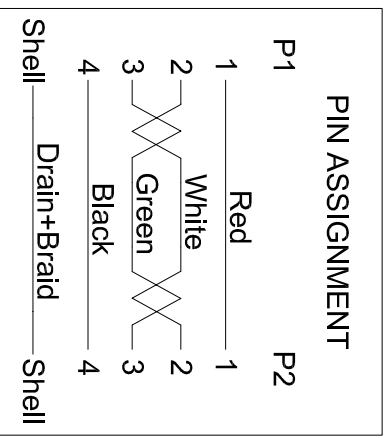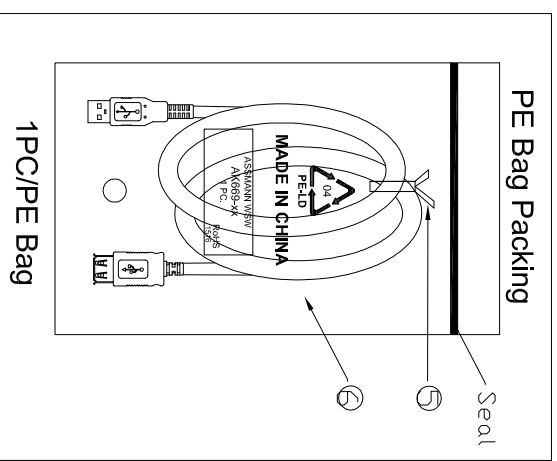

①	Inner Jacket	NA	LD-PE
②	PE Bag	1	Clear Print black "MADE IN CHINA" + "1PC"
③	TIE	1	White
④	Out Jacket	NA	PVC-45P Beige(BG002)
⑤	CONN	1	USB A Female Shell:Nickel Pin:G/F Insulator color:White, short type
⑥	CONN	1	USB A Male Shell:Nickel Pin:G/F Insulator color:White
⑦	Cable	1	USB1.1 UL2725 28#/1P+24#/2C+AEB OD:4.7mm Beige(BG002)

SPECIFICATION

Customer-No.

AK669-XX

RoHS compliant

Unit: mm

Scale	Free
TOLERANCE	
DIM	TOL
Angle	TOL

NO.	NAME.	Q'TY	Date	Name
①	Drawn		09.05.2016	Amy
	Modification			

ASSMANN WSW-No.	AK669-XX
Drawing-No.	ASS 7640 CA
Replace	rev00
Sheet	



1	2	3	4	5	6	7
H	G	F	E	D	C	B