

CTL SH4-200M364

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER



www.centralsemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CTL SH4-200M364 is a high performance 4.0 Amp silicon Schottky rectifier designed for applications requiring high voltage capability and high levels of efficiency in a low profile package.

MARKING CODE: CTL SH420



APPLICATIONS:

- DC-DC converters
- Reverse polarity protection
- By-pass diode

FEATURES:

- Low forward voltage
- Low reverse leakage current
- Low profile package

MAXIMUM RATINGS: ($T_A=25^\circ C$)

Peak Repetitive Reverse Voltage

SYMBOL		UNITS
V_{RRM}	200	V
V_R	200	V
$VR(RMS)$	140	V
I_O	4.0	A
I_{FSM}	100	A
T_J, T_{stg}	-55 to +150	$^\circ C$
Θ_{JA}	80	$^\circ C/W$
Θ_{JL}	15	$^\circ C/W$

DC Blocking Voltage

RMS Reverse Voltage

Average Forward Current ($T_L=125^\circ C$)

Peak Forward Surge Current, $t_p=8.3ms$

Operating and Storage Junction Temperature

Thermal Resistance (Note 1)

Thermal Resistance

ELECTRICAL CHARACTERISTICS: ($T_A=25^\circ C$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNITS
I_R	$V_R=200V$		0.15	1.0	μA
I_R	$V_R=200V, T_A=125^\circ C$		0.35	10	mA
BV_R	$I_R=500\mu A$	200			V
V_F	$I_F=4.0A$		0.76	0.84	V
C_J	$V_R=4.0V, f=1.0MHz$		140		pF

Notes: (1) FR-4 epoxy PCB with minimum copper pad area.


R1 (4-January 2013)

CTLSH4-200M364


SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER




TLM364 CASE - MECHANICAL OUTLINE

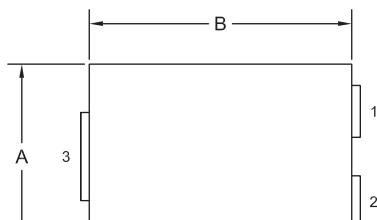

TOP VIEW

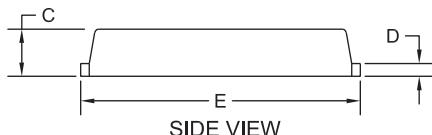

SIDE VIEW

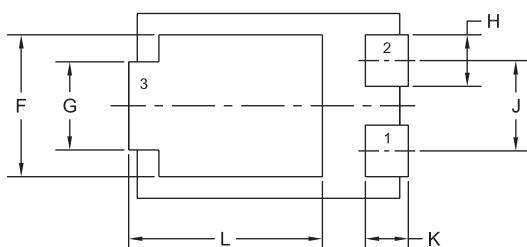


BOTTOM VIEW

R0

SYMBOL	DIMENSIONS		MILLIMETERS		
	INCHES	MIN	MAX	MIN	MAX
A	0.167	0.172	4.25	4.35	
B	0.238	0.243	6.05	6.15	
C	0.039	0.048	1.00	1.20	
D	0.009	0.014	0.25	0.35	
E	0.250	0.262	6.35	6.65	
F	0.128	0.136	3.25	3.45	
G	0.076	0.085	1.95	2.15	
H	0.044	0.052	1.10	1.30	
J		0.083		2.10	
K		0.035	0.044	0.90	1.10
L		0.171	0.183	4.35	4.65

TLM364 (REV:R0)

SUGGESTED MOUNTING PADS
(Dimensions in mm)

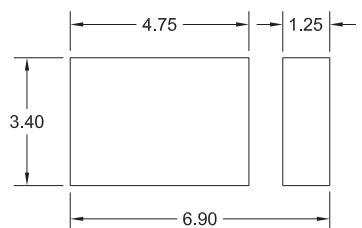

R0

LEAD CODE:

- 1) Anode
- 2) Anode
- 3) Cathode

MARKING CODE: CTLSH420

R1 (4-January 2013)


CTLSH4-200M364

SURFACE MOUNT SILICON
LOW V_F
SCHOTTKY RECTIFIER




TYPICAL ELECTRICAL CHARACTERISTICS


Typical Leakage Characteristics

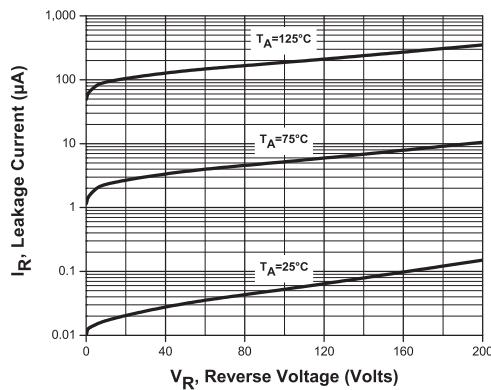


Typical Forward Voltage

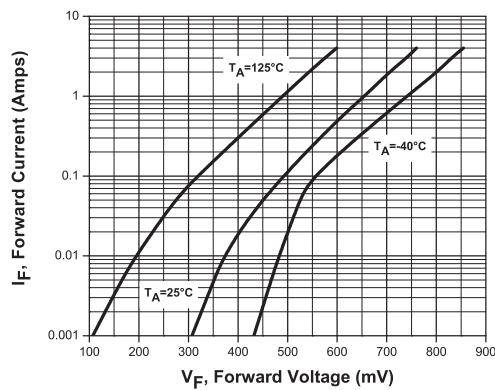

Typical Capacitance

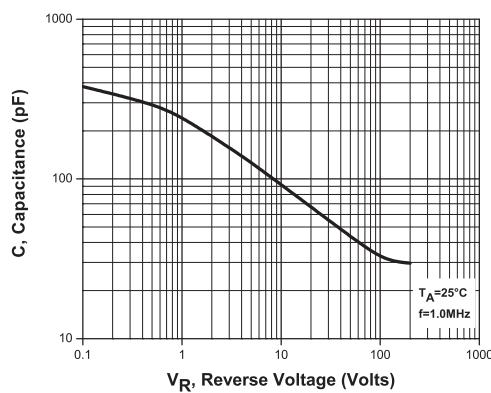

Current Derating

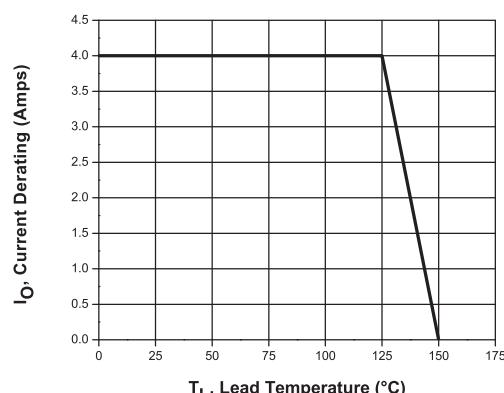

R1 (4-January 2013)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.

145 Adams Avenue

Hauppauge, NY 11788 USA

Main Tel: (631) 435-1110

Main Fax: (631) 435-1824

Support Team Fax: (631) 435-3388

www.centralsemi.com

Worldwide Field Representatives:

www.centralsemi.com/wwreps

Worldwide Distributors:

www.centralsemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centralsemi.com/terms